




REV.	CHANGE CONTENT	BY	DATE

- NOTE:
1. DISPLAY TYPE: STN-Y/G-POSITIVE
 2. DISPLAY MODE: TRANSFLECTIVE
 3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, Vop=4.6V
 4. VIEWING DIR.: 6:00
 5. OP. TEMP.: -20°C~70°C
 6. ST. TEMP.: -30°C~80°C
 7. BACKLIGHT: COLOR-Y/G, Vf=4.1±0.2V, If<130mA
 8. DRIVER IC:ST7066U-0A VDD=5.0V

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
SYMBOL	VSS	VDD	V0	RS	R/W	E	D0	D1	D2	D3	D4	D5	D6	D7	LED+	LED-

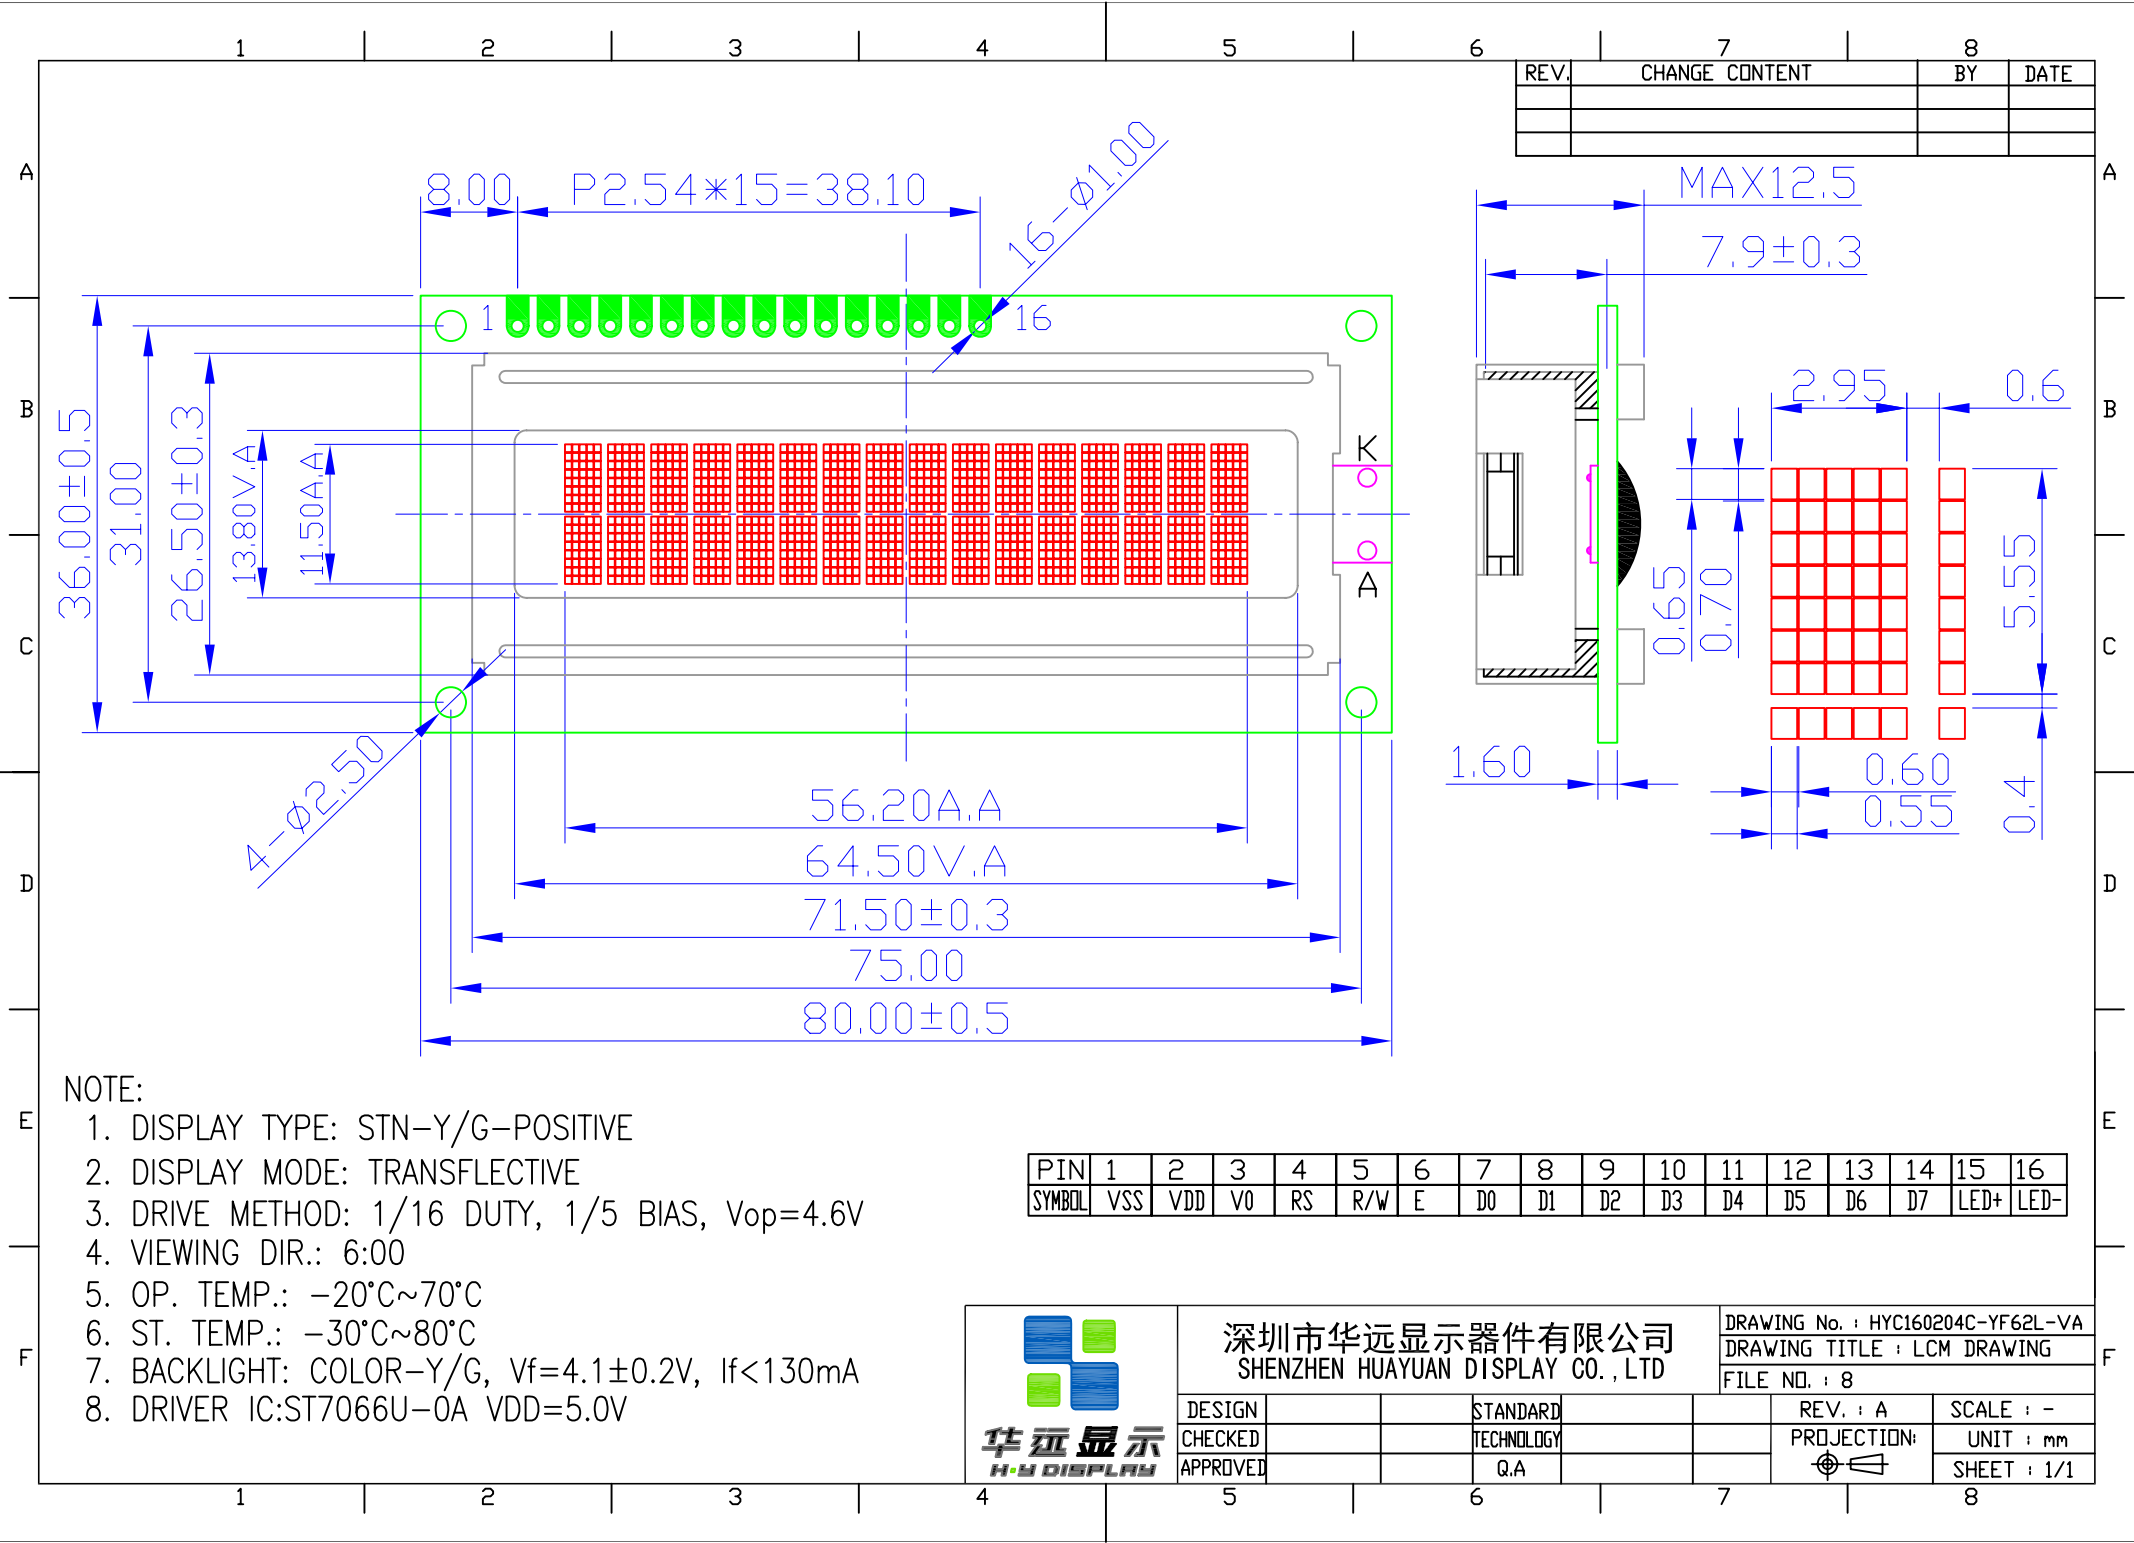


华远显示
H·Y DISPLAY

深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DESIGN			STANDARD		
CHECKED			TECHNOLOGY		
APPROVED			Q.A		

DRAWING No. : HYC160204C-YF62L-VA
DRAWING TITLE : LCM DRAWING
FILE NO. : 8

REV. : A	SCALE : -
PROJECTION:	UNIT : mm
	SHEET : 1/1