


|      |                |         |
|------|----------------|---------|
|      | 7              | 8       |
| REV. | CHANGE CONTENT | BY DATE |
|      |                |         |
|      |                |         |
|      |                |         |

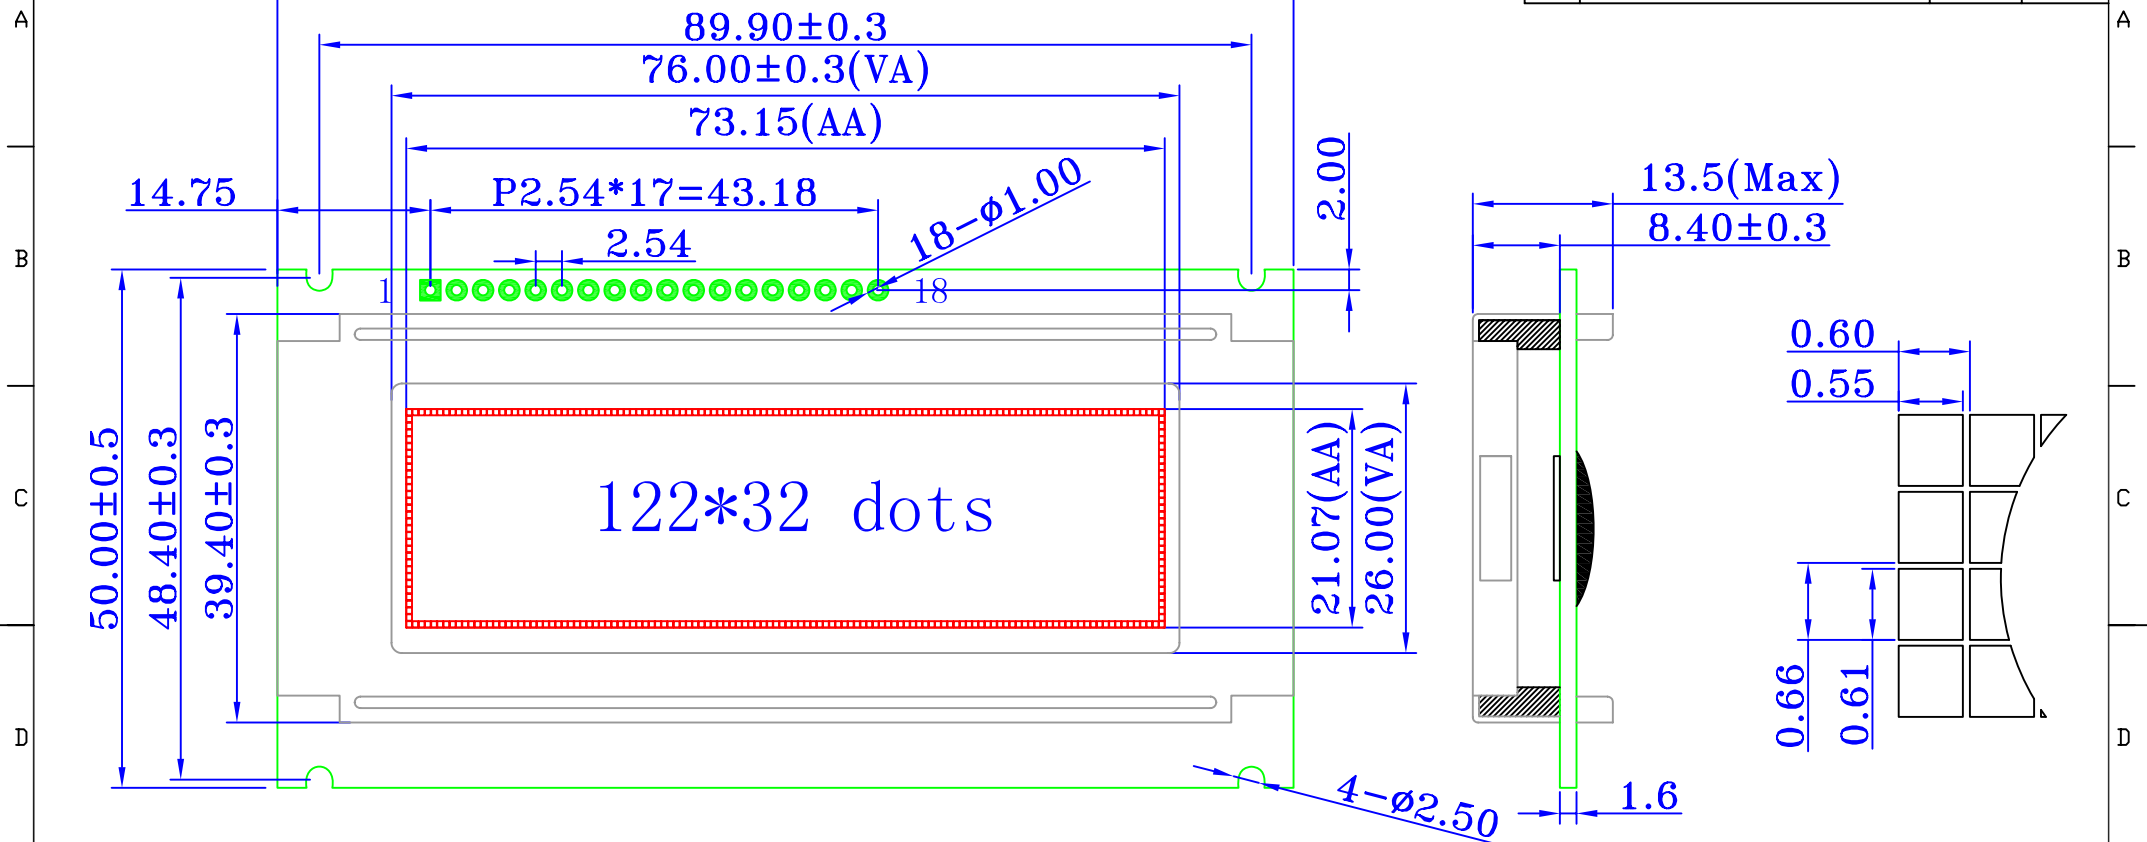

|        |     |     |    |    |     |    |    |    |     |     |     |     |     |     |     |     |      |      |
|--------|-----|-----|----|----|-----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|
| PIN No | 1   | 2   | 3  | 4  | 5   | 6  | 7  | 8  | 9   | 10  | 11  | 12  | 13  | 14  | 15  | 16  | 17   | 18   |
| Symbol | VSS | VDD | VO | A0 | R/W | E1 | E2 | NC | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | LEDA | LEDK |

NOTES:

1. DISPLAY TYPE: STN
2. DISPLAY MODE: TRANSFLECTIVE-POSITIVE-Y/G
3. VIEWING DIRECTION: 6 O'CLOCK
4. VDD: 5.0 V
5. OPERATING TEMP: -20°C TO 70°C  
STORAGE TEMP: -30°C TO 80°C
6. DRIVER IC: PT6520(COB)
7. DRIVER METHOD: 1/32 DUTY 1/7 BAIS VOP:7.5V
8. BACK LIGHT: LED Y/G,180mA 4.2V
9. Anti-UV Filter



深圳市华远显示器件有限公司  
SHENZHEN HUAYUAN DISPLAY CO., LTD

|                                    |
|------------------------------------|
| DRAWING No. : HYG1223201C-YF62L-VB |
| DRAWING TITLE : LCM                |
| FILE NO: 8                         |

|          |  |            |  |                                                                                       |             |
|----------|--|------------|--|---------------------------------------------------------------------------------------|-------------|
| DESIGN   |  | STANDARD   |  | REV. :                                                                                | SCALE : -   |
| CHECKED  |  | TECHNOLOGY |  | PROJECTION:                                                                           | UNIT : mm   |
| APPROVED |  | Q.A        |  |  | SHEET : 1/1 |