



REV	CHANGE CONTENT	BY	DATE

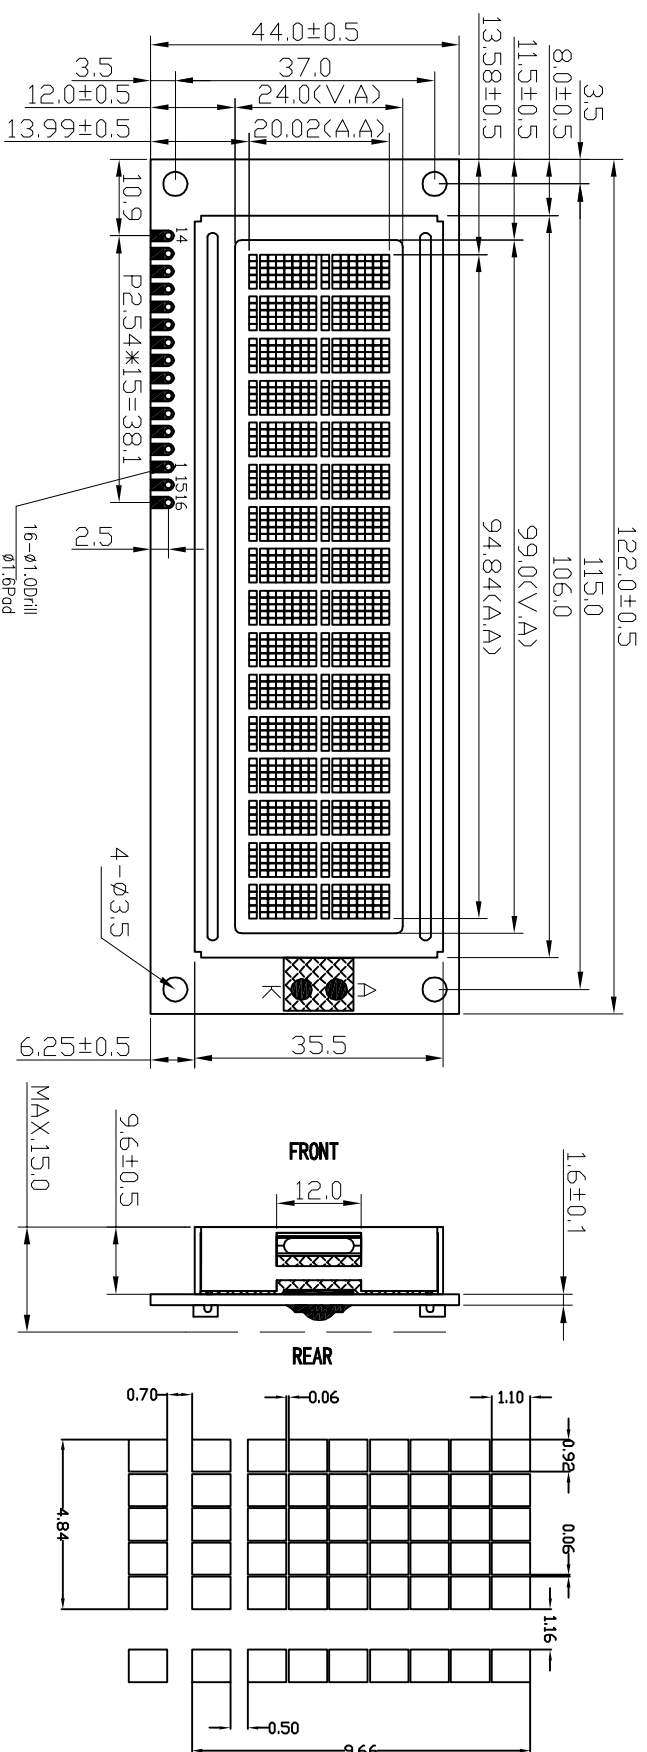

- NOTE:
1. DISPLAY TYPE: STN-Y/G-POSITIVE
  2. DISPLAY MODE: TRANSPARENT
  3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, 5V Vop, 5V VDD
  4. VIEWING DIR.: 6:00
  5. OP. TEMP.: -20°C~70°C
  6. ST. TEMP.: -30°C~80°C
  7. BACKLIGHT: COLOR-Y/G, VLED=4.2V, MIN.80 CD/m
  8. DRIVER IC:S6A0069 OR EQU.

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
SYMBOL	GND	VDD	V0	RS	R/W	E	D0	D1	D2	D3	D4	D5	D6	D7	NC/LED+	NC/LED-



				深圳市华远显示器件有限公司				DRAWING NO.: HCD203C-YF62L-VA			
SHENZHEN HUAYUAN DISPLAY CO., LTD								DRAWING TITLE: LCM DRAWING			
DESIGN: LI JINTANG 05.07.11				STANDARD				REV.: A			
CHECKED				TECHNOLOGY				PROJECTION:			
APPROVED				QA				SHEET: 1/1			