
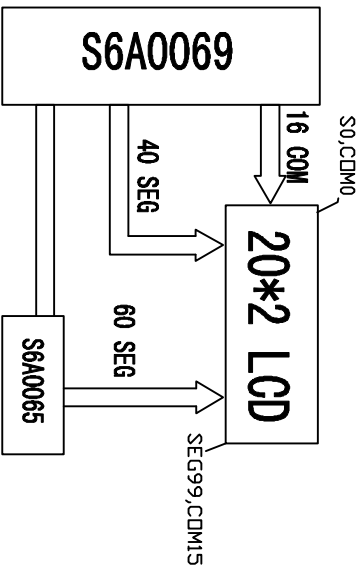
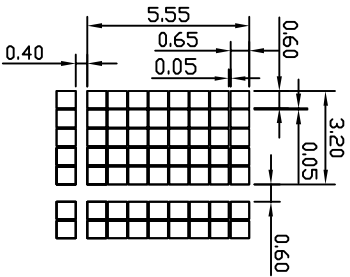
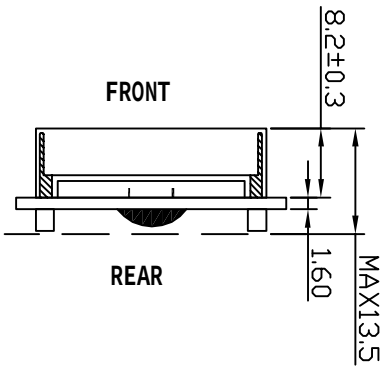


REV	CHANGE CONTENT	BY	DATE

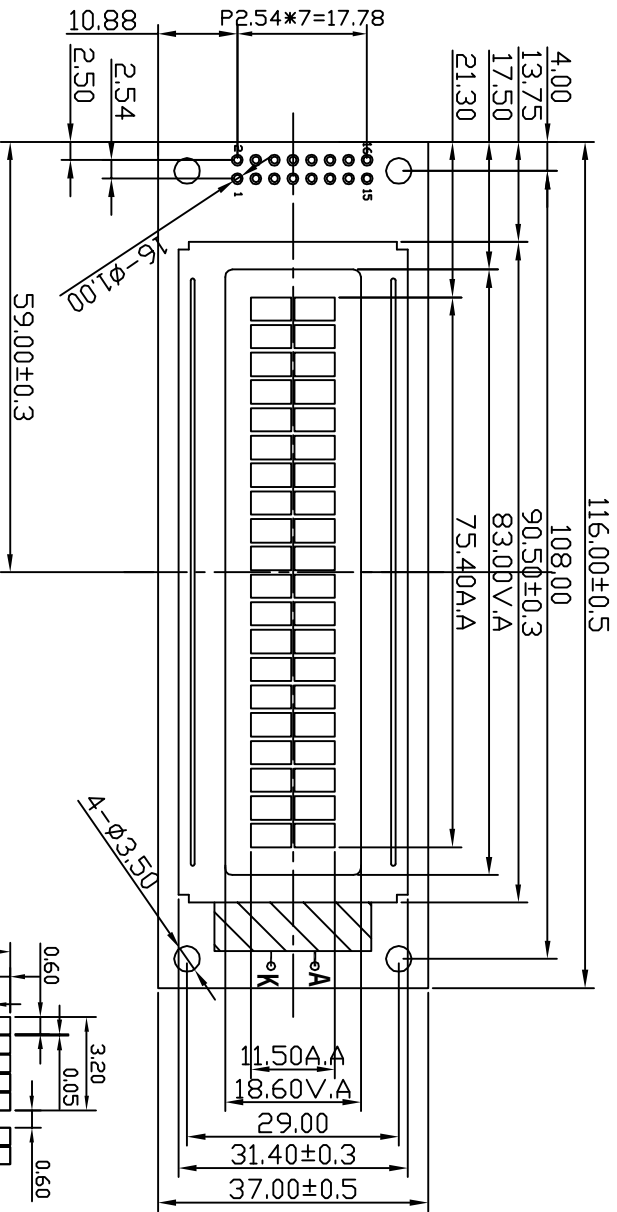

- NOTE:
1. DISPLAY TYPE: STN,NEGATIVE,TRANSMISSIVE,BLUE
 2. VIEWING DIR: 6:00
 3. DRIVE METHOD: 1/16DUTY,1/5BIAS,Vop 5.0V VDD=5.0V
 4. DP,TEMP: -20~70°C
 5. ST,TEMP: -30~80°C
 6. DRIVER IC: S6A0069 S6A0065
 7. LED B/L: VF=3.3±0.2V,IF=30mA
COLOR:WHITE
 8. ROHS Compliant

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
SYMBOL	VSS	VDD	V0	RS	R/W	E	D0	D1	D2	D3	D4	D5	D6	D7	A	K

深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No.: HC200201C-0162L-VC
DRAWING TITLE: LCM DRAWING

FILE NO.: 8

REV.: A

SCALE: -

UNIT: mm

SHEET: 1/1

DESIGN: ZOUYS

CHECKED: 06.03.13

STANDARD: TECHNOLOGY

APPROVED: Q.A

PROJECTION: 1