


1 2 3 4 5 6

REV. CHANGE CONTENT BY DATE

7 8

A

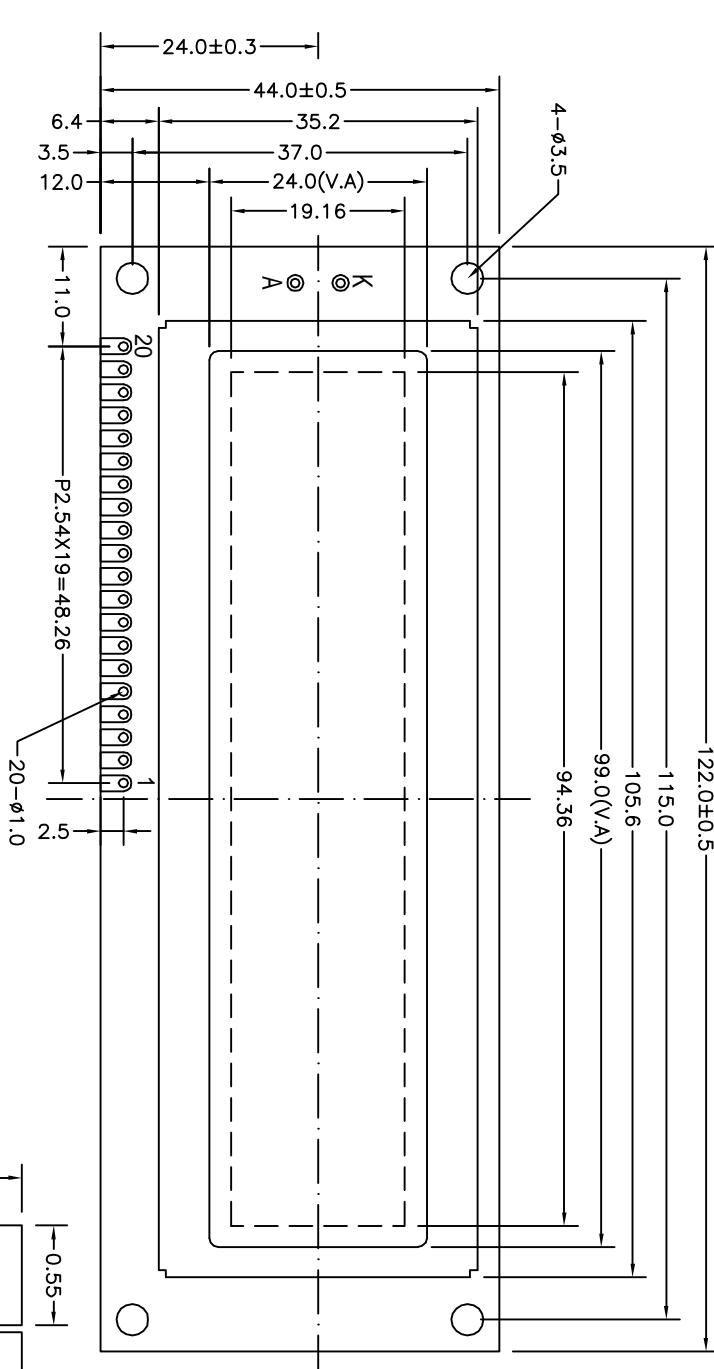

NOTES:

1. DISPLAY TYPE: STN-Y/G
2. DISPLAY MODE: TRANSFLECTIVE POSITIVE
3. VIEWING DIRECION: 6 O'CLOCK
4. VDD: 5.0 V

5. OPERATING TEMP: -20°C TO 70°C
STORAGE TEMP: -30°C TO 80°C

6. DRIVER IC: ST7920(COB)

7. DRIVER METHOD: 1/32 DUTY 1/6 BAIS
8. BACK LIGHT: LED Y/G, 5.0V, 240mA

深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD



1 2 3 4 5 6 7 8

E

F

DRAWING NO.: HG1603201C-YF62L-YA
DRAWING TITLE: LCD MODULE
FILE NO.: 8
REV. : A
PROJECTION: -
SCALE : -
UNIT : MM
APPROVED: 
Q.A. 
SHEET : 1/1