REV.	CHANGE CONTENT	BY	DATE

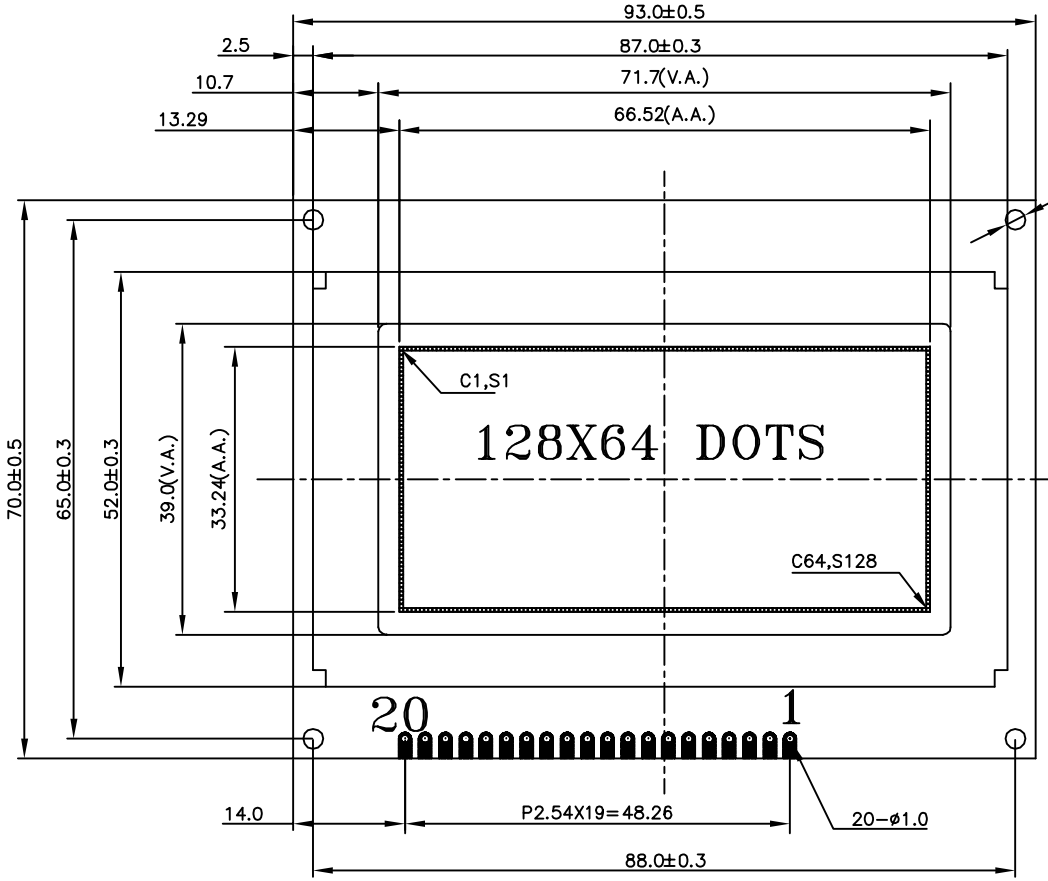

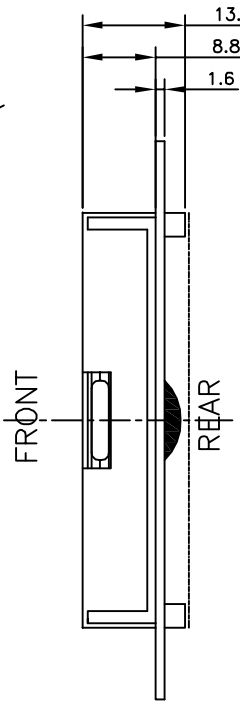

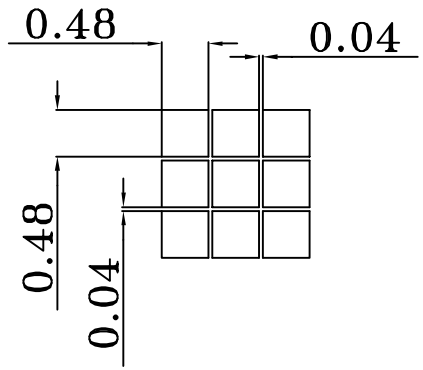

LCD PIN	IC PIN
C1~C64	IC1:C1~C64
S1~S64	IC2:S1~S64
S65~S128	IC3:S1~S64

NOTE:

DISPLAY TYPE : STN TRANSFLECTIVE-POSITIVE-YELLOW-GREEN
VIEWING DIRECTION : 6: 00
OPERATING VOLT. : VOP=11V
OPERATING TEMP. : -20℃ ~ +70℃
STORAGE TEMP. : -30℃ ~ +80℃
DRIVE METHOD : 1/64 DUTY 1/9 BIAS VDD:5.0V
LED : COLOR: YELLOW-GREEN 底光5.0V
DRIVE IC : S6B0107,S6B0108*2
THE DIMENSION IN FRAME IS CRITICAL TO QUAUTY

PIN NO.	1	2	3	4	5	6	7~14	15	16	17	18	19	20
SYMBOL	Vss	VDD	V0	D/I	R/W	E	DB0~DB7	CS1	CS2	/RST	VEE	BL+	BL-

华远显示 H·W DISPLAY

深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO.,LTD

DRAWING No. : HG1286406C-YF62L-VA
DRAWING TITLE: LCD MODULE
FILE NO.: 8

DESIGN	ZOUYS	06.08.11	STANDARD			REV. : A	SCALE : -
CHECKED			TECHNOLOGY			PROJECTION:	UNIT : MM
APPROVED			Q.A				SHEET : 1/1