


REV.	DESCRIPTION	BY	DATE

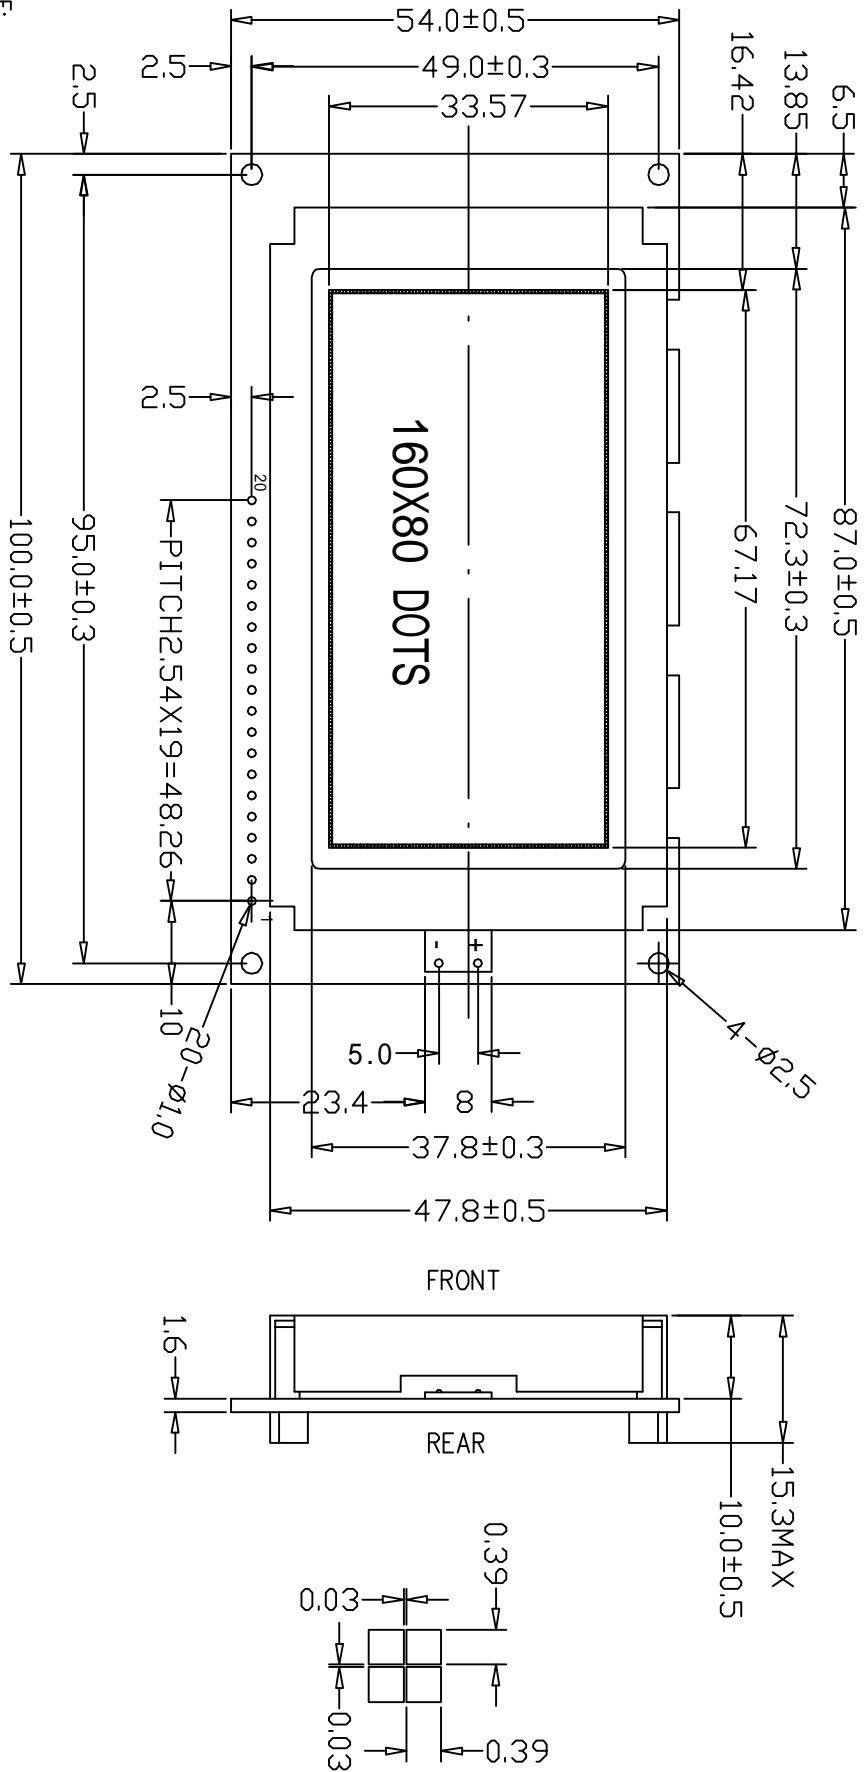

NOTE:

DISPLAY TYPE : STN-POSITIVE-TRANSPARENT-Y/G

VIEWING DIRECTION : 12:00

OPERATING VOLT. : VOP=10.0V

OPERATING TEMP. : -20℃ ~ +70℃

STORAGE TEMP. : -30℃ ~ +80℃


DRIVE METHOD : 1/80 DUTY 1/8.7BIAS VDD:5.0V

LED : COLOR:Y/G 4.2V±0.2 360mA

LCD DRIVER : S6B2086

LCD CONTROLLER : LC7981

PIN	1	2	3	4	5	6	7	8	9	10
VSS	VDD	V0	RS	R/W	E	DB0	DB1	DB2	DB3	
PIN	11	12	13	14	15	16	17	18	19	20
DB4	DB5	DB6	DB7	/CS	/RES	VEE	DISOFF	LED+	LED-	



深圳市华远显示器件有限公司  
SHENZHEN HUAYUAN DISPLAY CO., LTD

DESIGN	JHG	20090708	TECHNOLOGY					REV. : A	SCALE : -
CHECKED			Q.A					PROJECTION:	UNIT : MM
STANDARD			APPROVED						SHEET : 1/1

DRAWING No. : HG1608001S-YFC2L-VB

DRAWING TITLE: LCM

FILE NO: 8