


REV.	CHANGE CONTENT	BY	DATE

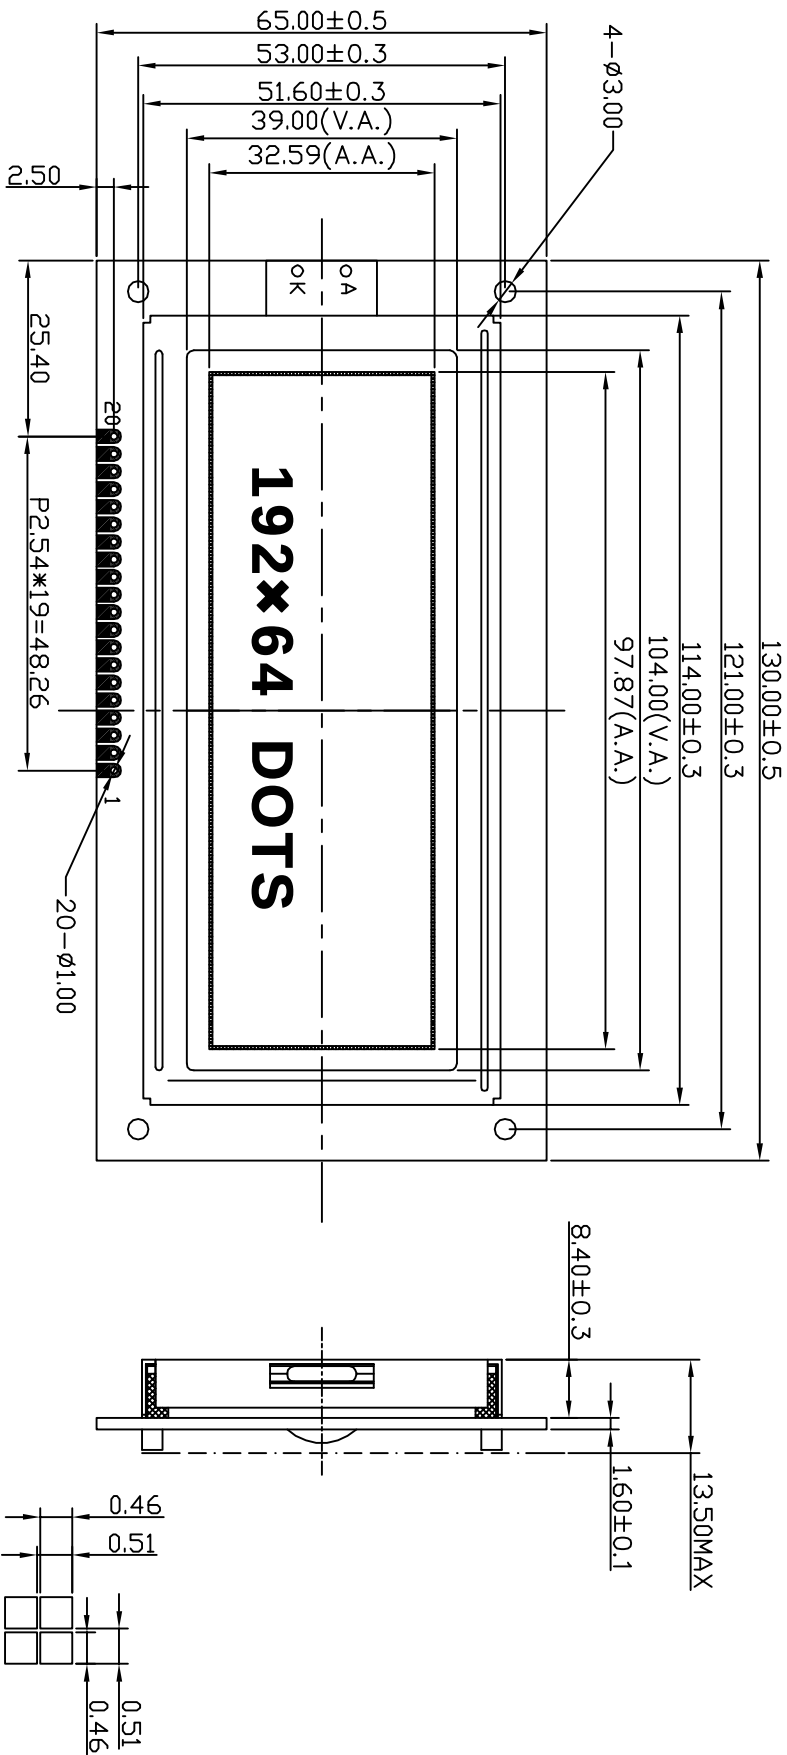

Pin No.	1	2	3	4	5	6	7-14	15	16	17	18	19	20
Symbol	Vss	Vdd	V0	RS	R/W	E	DB0-DB7	CS1	/RST	CS2	CS3	V _{OUT}	LED+

NOTE:

- 1.STN,Y/G,POSITIVE,TRANSFLECTIVE
- 2.1/64DUTY,1/9BIAS,VOP:12.7V,VDD:5.0V
- 3.VIEWING DIRECTION: 6:00
- 4.OP.TEMP:-20°C--+70°C
- 5.ST.TEMP:-30°C--+80°C
- 6.DRIVER IC:AIP3107/AIP31108
- 7.LED:Y/G IF<240mA,VLED=5V



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DESIGN	JHG	06.05.08	STANDARD	REV. : A	SCALE : -
CHECKED			TECHNOLOGY		UNIT : mm
APPROVED			Q.A		SHEET : 1/1

DRAWING No. : HGI926401C-YF62L-VJ

DRAWING TITLE: LCM DRAWING

FILE NO.: 8