



REV.	CHANGE CONTENT	BY	DATE

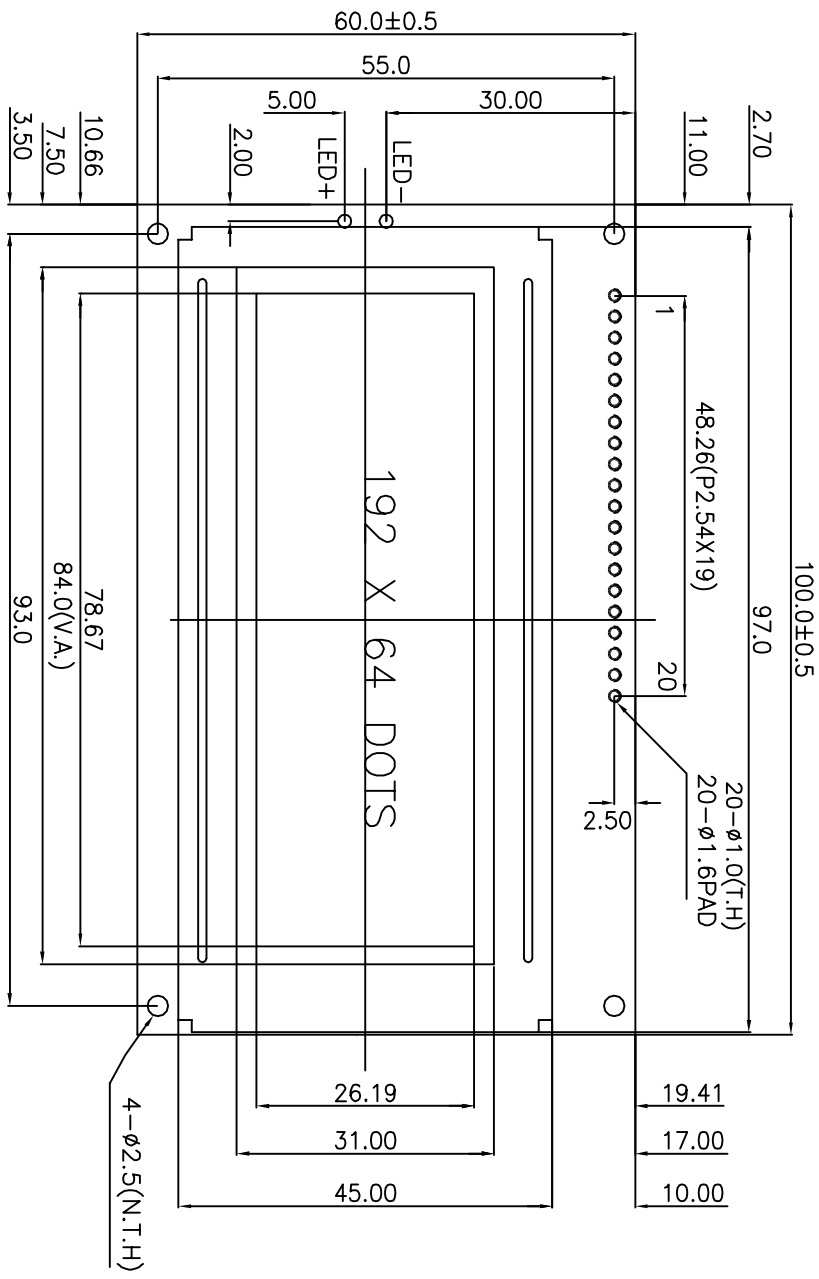

DOTS DETAIL

LED B/L TYPE	H1	H2
EL B/L & NO B/L TYPE	7.0	13.0Max.
	5.0	10.5 Max.

CSA	CSB	SELECTION
0	0	IC1
0	1	IC2
1	0	IC3
1	1	NONE

Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	E	R/W	RS	VO	VDD	VSS	CSB	CSA	VEE	RST	SLA	SLK

NOTE:

- DISPLAY TYPE : STN TRANSFLECTIVE-POSITIVE-Y/G
- VIEWING DIRECTION : 6: 00
- OPERATING VOLT. : VOP=12.0V
- OPERATING TEMP. : -20℃ ~ +70℃
- STORAGE TEMP. : -30℃ ~ +80℃
- DRIVE METHOD : 1/64 DUTY 1/9 BIAS
- LED : COLOR:YELLOW-GREEN VDD:5.0V
- DRIVE IC : S6B0107,S6B0108*3 5.0V,180mA



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No. : HG1926404C-YF62L-VB

DRAWING TITLE: LCD MODULE

DESIGN : LI JINTANG 06.04.28 STANDARD

CHECKED : TECHNOLOGY

APPROVED : Q.A

REV. : SCALE : -

PROJECTION: UNIT : MM

SHEET : 1/1