




REV	CHANGE CONTENT	BY	DATE
A	更改显示条件	Zouys	06.02.20

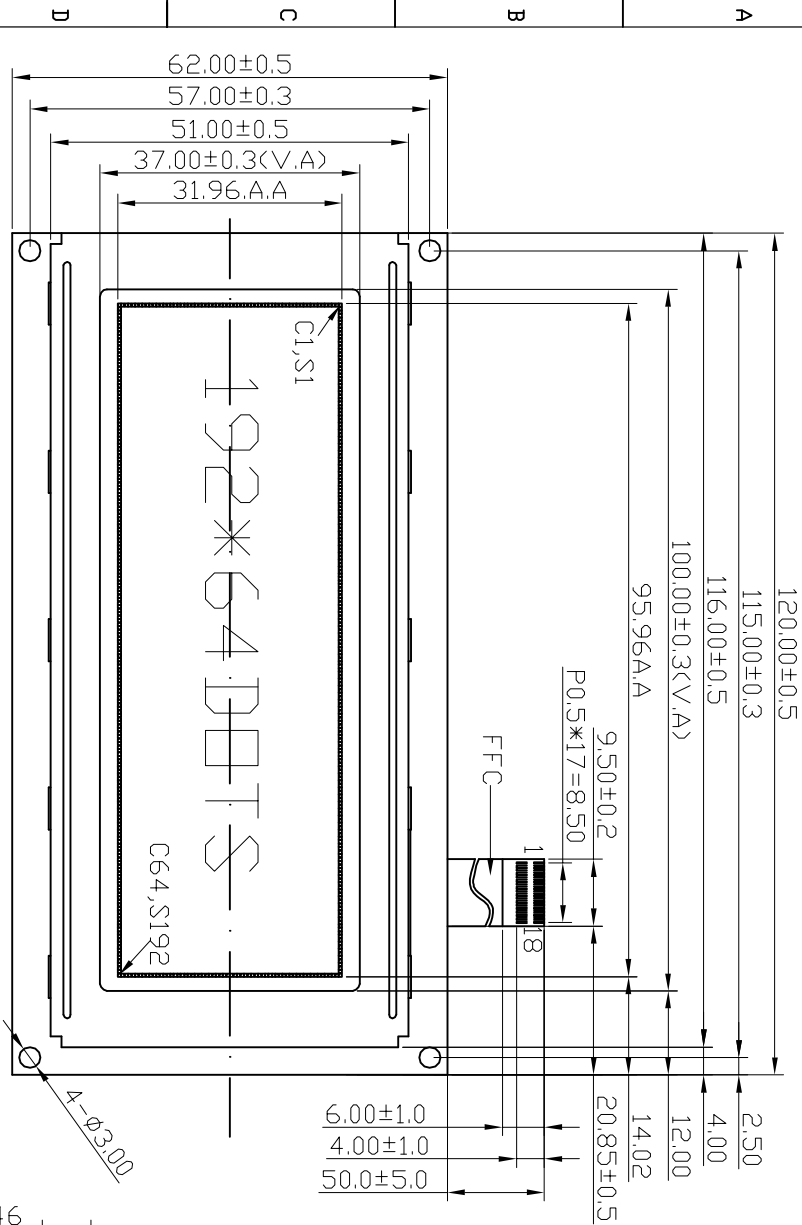

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
SYMBOL	VSS	VDD	VD	RS	R/W	E1	E2	D0	D1	D2	D3	D4	D5	D6	D7	RES	AK5.0	K(0V)

NOTE:

1. DISPLAY TYPE: STN-Y/G-POSITIVE
2. DISPLAY MODE: TRANSFLECTIVE
3. DRIVE METHOD: 1/32 DUTY, 1/4 BIAS, 4.8V Vop, 5V VDD
4. VIEWING DIR.: 6:00
5. OP. TEMP.: -20°C~70°C
6. ST. TEMP.: -30°C~80°C
7. BACKLIGHT: COLOR-Y/G, Vf=5.0±0.2V, If=240mA
8. DRIVER IC: ST7920(2), ST7921(4)

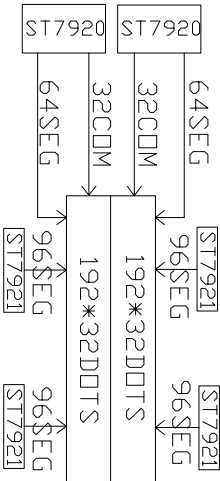

深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No.: HG1926412C-YF62L-VA
DRAWING TITLE: LCM
FILE NO.: 9

DESIGN	JHG	20090916	STANDARD	REV. : A	SCALE : -
CHECKED			TECHNOLOGY	PROJECTION	UNIT : mm
APPROVED		QA			SHEET : 1/1