


REV.	CHANGE CONTENT	BY	DATE
B	将缺框的可视区往左边延长1mm	DAP	09.11.17

NO	NAME
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7-14	DO-D7
15	/CS
16	/RST
17	VEE
18	NC
19	BLA
20	BLK

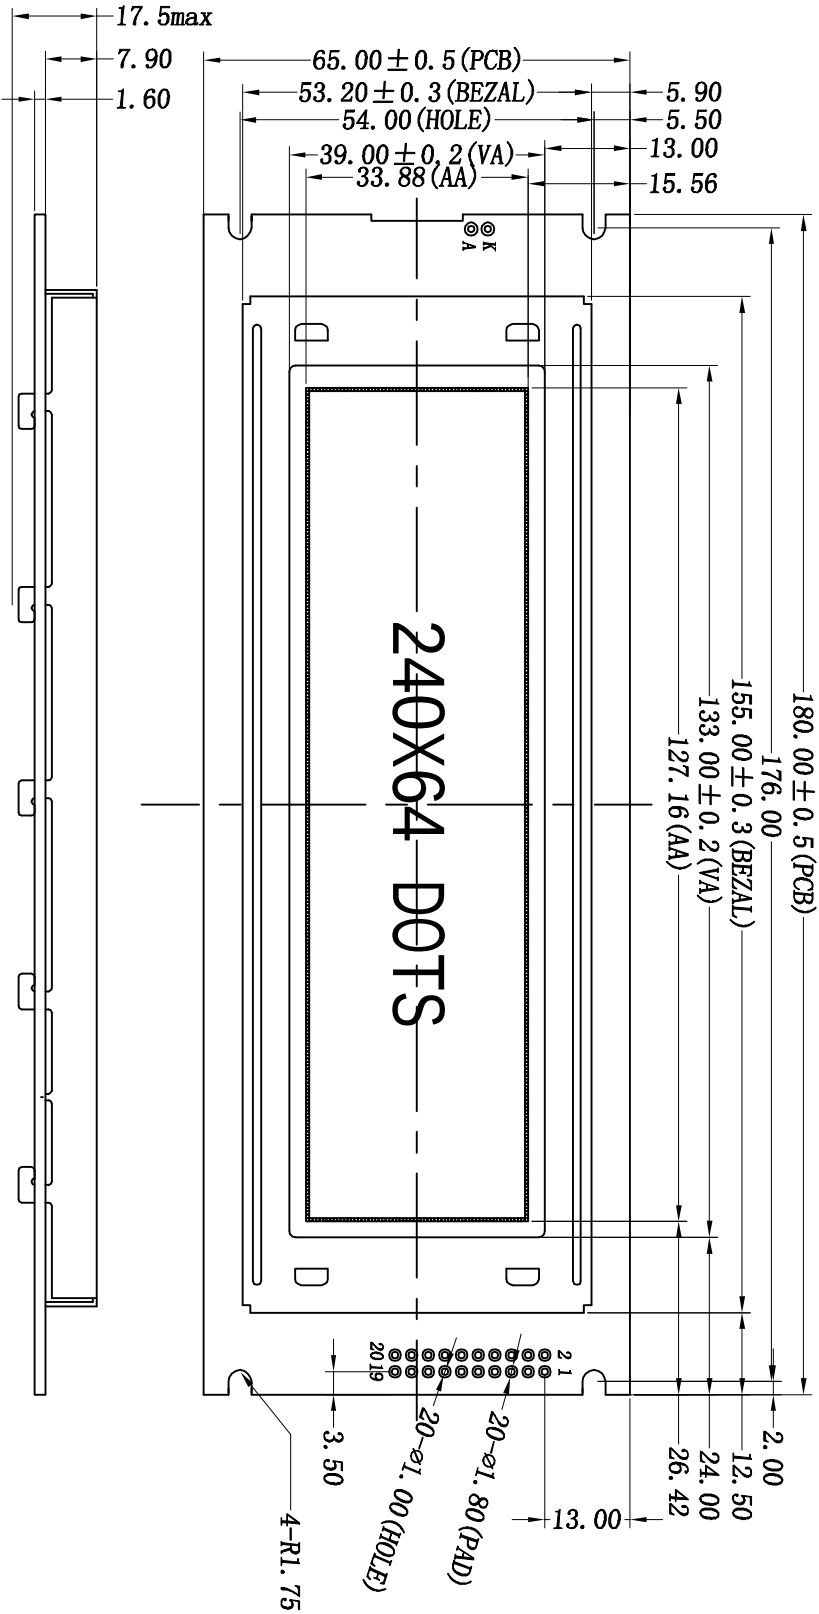

NOTE:

- 1.DISPLAY TYPE : STN-BLUE-NEGATIVE
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSMISSIVE
- 4.DRIVE METHOD:1/64DUTY,1/9BIAS,Vop=12V
- 5.OPERATING TEMP:-20° C~+70° C
- 6.STARAGE TEMP:-30° C~+80° C
- 7.LCD Controller:LC7981
- 8.POWER SUPPLY FOR LOGIC:5.0V
- 9.BACKLIGHT:WHITE,5 LED,5.0V,100mA



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO.,LTD

DESIGN	JHG	20081201	STANDARD				REV. : A	SCALE : -
CHECKED			TECHNOLOGY				PROJECTION:	UNIT : mm
APPROVED			Q.A					SHEET : 1/1

DRAWING No.: HC2406408C-DT62L-VA
DRAWING TITLE: LCM Drawing
FILE NO.: 8