
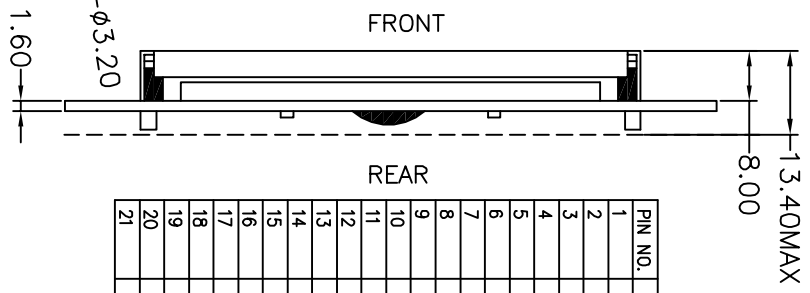


REV.	CHANGE CONTENT	BY	DATE

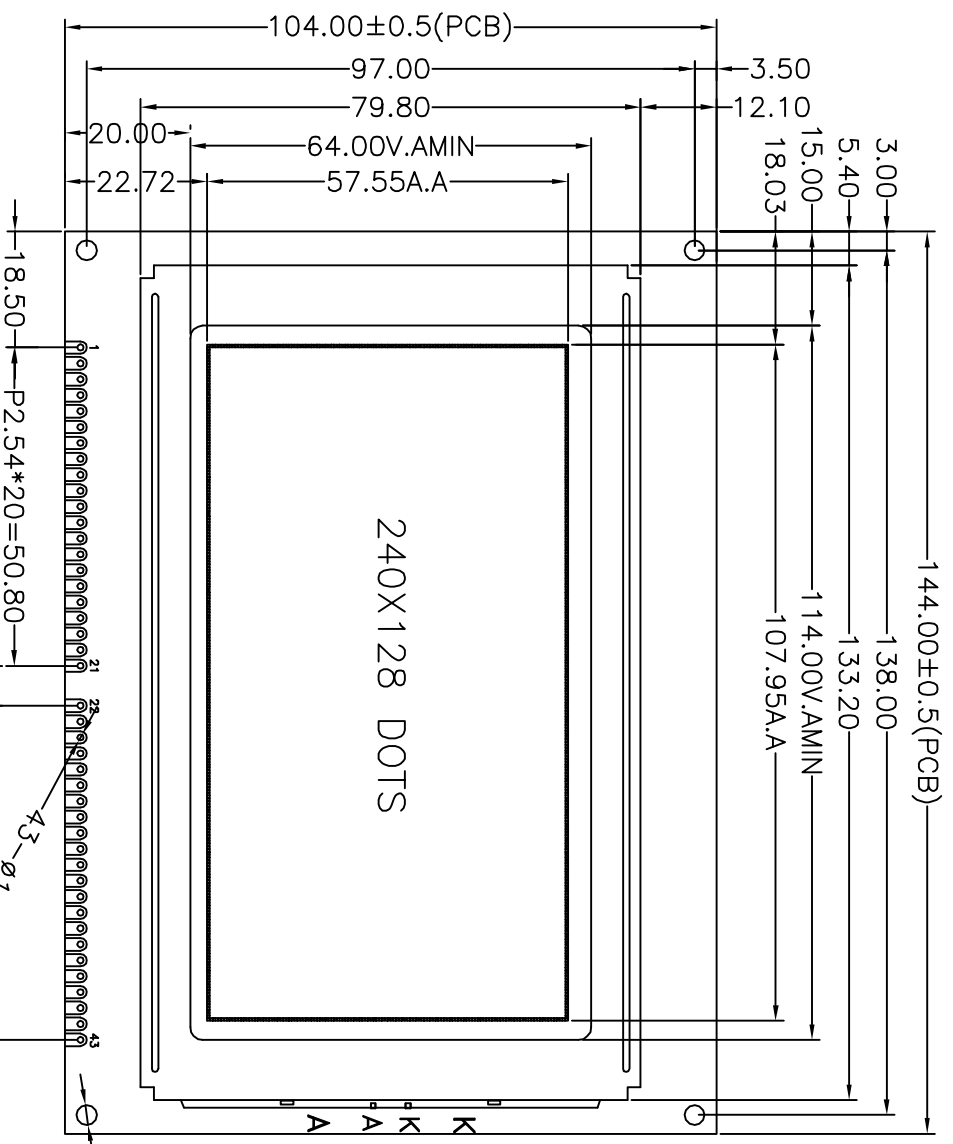


PIN NO.	NAME	PIN NO.	NAME
1	FG	43	FG
2	VSS	42	VSS
3	VDD	41	VDD
4	V0	40	V0
5	/MR	39	/MR
6	/RD	38	/RD
7	/CS	37	/CS
8	C/D	36	C/D
9	/RST	35	NC
10	DB0	34	/RST
11	DB1	33	DB0
12	DB2	32	DB1
13	DB3	31	DB2
14	DB4	30	DB3
15	DB5	29	DB4
16	DB6	28	DB5
17	DB7	27	DB6
18	FS	26	DB7
19	VEE	25	FS
20	LED+	24	VEE
21	LED-	23	LED+
		22	LED-

NOTE:

- 1 DISPLAY TYPE : STN/BLUE
- 2 VIEWING DIRECTION : 6 O'CLOCK
- 3 POLARIZER MODE : TRANSMISSIVE/NEGATIVE
- 4 DRIVE METHOD : 1/128 DUTY 1/12 BIAS
- 5 OPERATING VOLTAGE : 18.5V(FOR REFERENCE VOLTAGE)
- 6 OPERATING TEMP : 0°C---+50°C
- 7 STORAGE TEMP : -20°C---+60°C
- 8 CONNECTION : ZEBRA
- 9 BACKLIGHT:WHITE 5.0V,120mA
- 10 CONTROL CHIP:T6963C
- 11 LOGIC VOLTAGE:5.0V

NOTE: 1. Pin No.18 FS: FONT SELECT

FS=L,8X8 Character Font



华远显示
SHENZHEN HUAYUAN DISPLAY CO., LTD

深圳市华远显示器件有限公司

DESIGN : JHG

CHECKED : APPROVED

20090709

STANDARD TECHNOLOGY

Q.A

DRAWING No.: H624012802C-0160L-1/A

DRAWING TITLE: LCM

FILE NO.: 8

REV.: A

SCALE: -

PROJECTION: UNIT: MM

SHEET: 1/1