

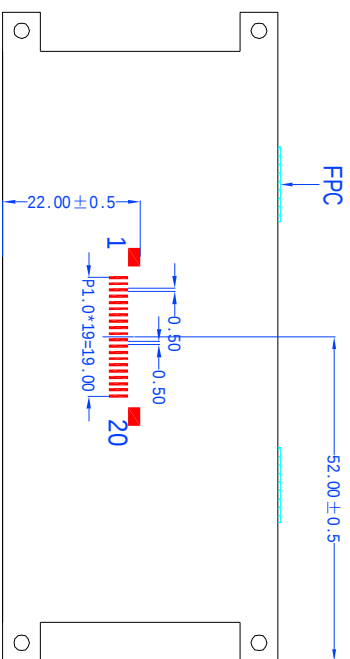
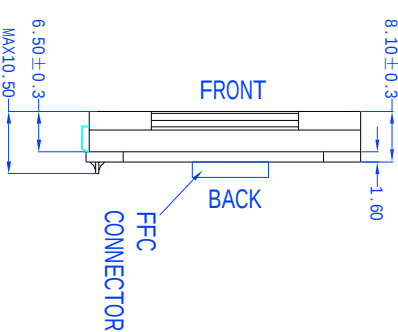


REV.	CHANGE	CONTENT	BY	DATE

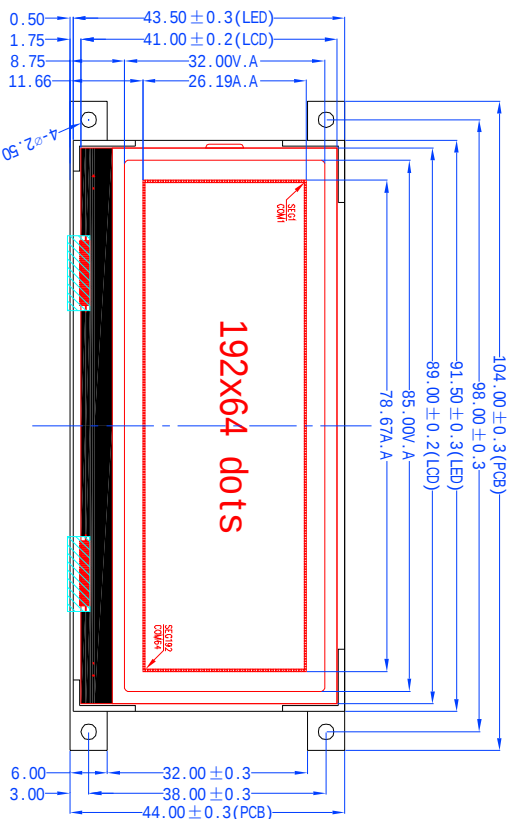

PIN	DESCRIPTION
1	DB0
2	DB1
3	DB2
4	DB3
5	DB4
6	DB5
7	DB6(SCL)
8	DB7(SI)
9	/RD(E)
10	/WR(R/W)
11	D/I(RS)
12	NC
13	VDD
14	VSS
15	/CSB
16	/CSA
17	NC
18	/RES
19	BLA
20	BLK

NOTE:

- 1.STN,POSITIVE,TRANSPARENT Y/G
- 2.1/64DUTY,1/9BIAS,VOP:9V,VDD:3.3V
- 3.VIEWING DIRECTION: 12:00
- 4.OP.TEMP:-20°C-+70°C
- 5.ST.TEMP:-30°C-+80°C
- 6.LCD CONTROLLER:ST7565P
- 7.LED:Y/G 5.0V 135mA
- 8.Serial interface (SPI-4)



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DESIGN	JHG	STANDARD
CHECKED		TECHNOLOGY
APPROVED		QA

DRAWING No. : HG1926417G-YFC2L-VC
DRAWING TITLE: LCM
FILE NO: 7

REV. : A	SCALE : -
PROJECTION:	UNIT : mm
SHEET : 1/1	