


REV.	CHANGE CONTENT	BY	DATE

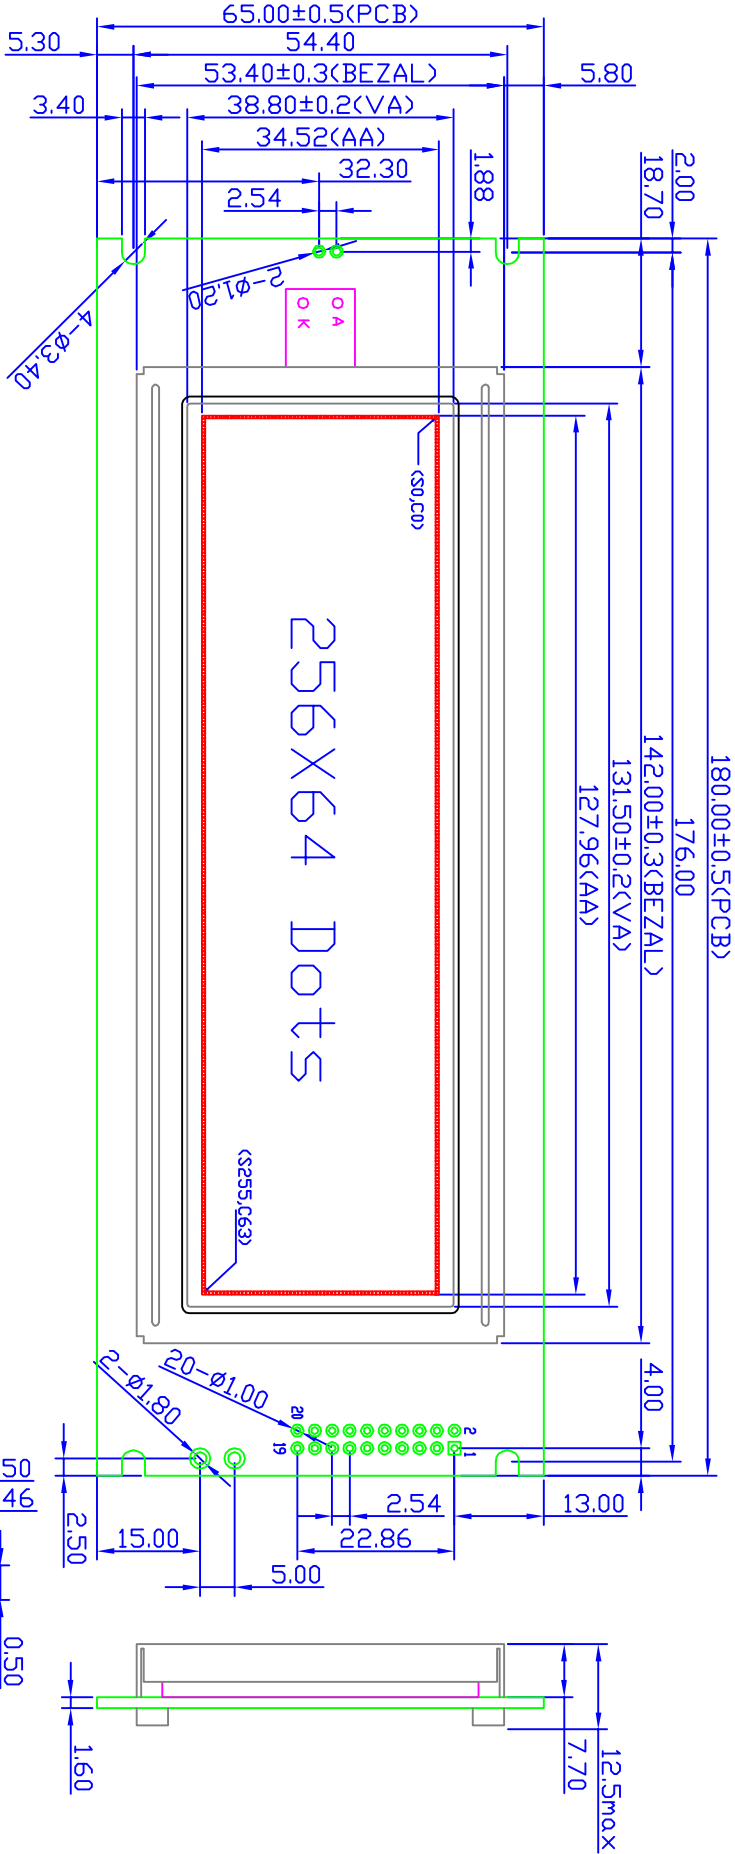

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
FG	VSS	VDD	NC	R/W	E1	E2	RS	NC	/RST	D0	D1	D2	D3	D4	D5	D6	D7	BLA	BLK

Note:

1. DISPLAY TYPE :STN-POSITIVE-Y/G
2. POLARIZER MODE: TRANSFLECTIVE
3. DRIVE METHOD: 1/32duty, 1/6.7Bias, Vop=7.0V
4. OPERATING TEMP. :-25°C ~+75°C
5. STORAGE TEMP. :-35°C ~ +85°C
6. BACKLIGHT: Y/G,SIDE-LIGHT,VF=5.0V,IF=330mA
7. LCD CONTROLLER :ST7920U-0B
8. LOGIC VOLTAGE : VDD=5.0V

				深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD				DRAWING No. : HG2566401C-VA DRAWING TITLE: LCM FILE NO. : 8				REV. : A PROJECTION: 				SCALE : - UNIT : mm SHEET : 1/1			
DESIGN	JHG	20081020	STANDARD																
CHECKED			TECHNOLOGY																
APPROVED			Q.A																

华远显示
H-Y DISPLAY