


REV.	CHANGE CONTENT	BY	DATE

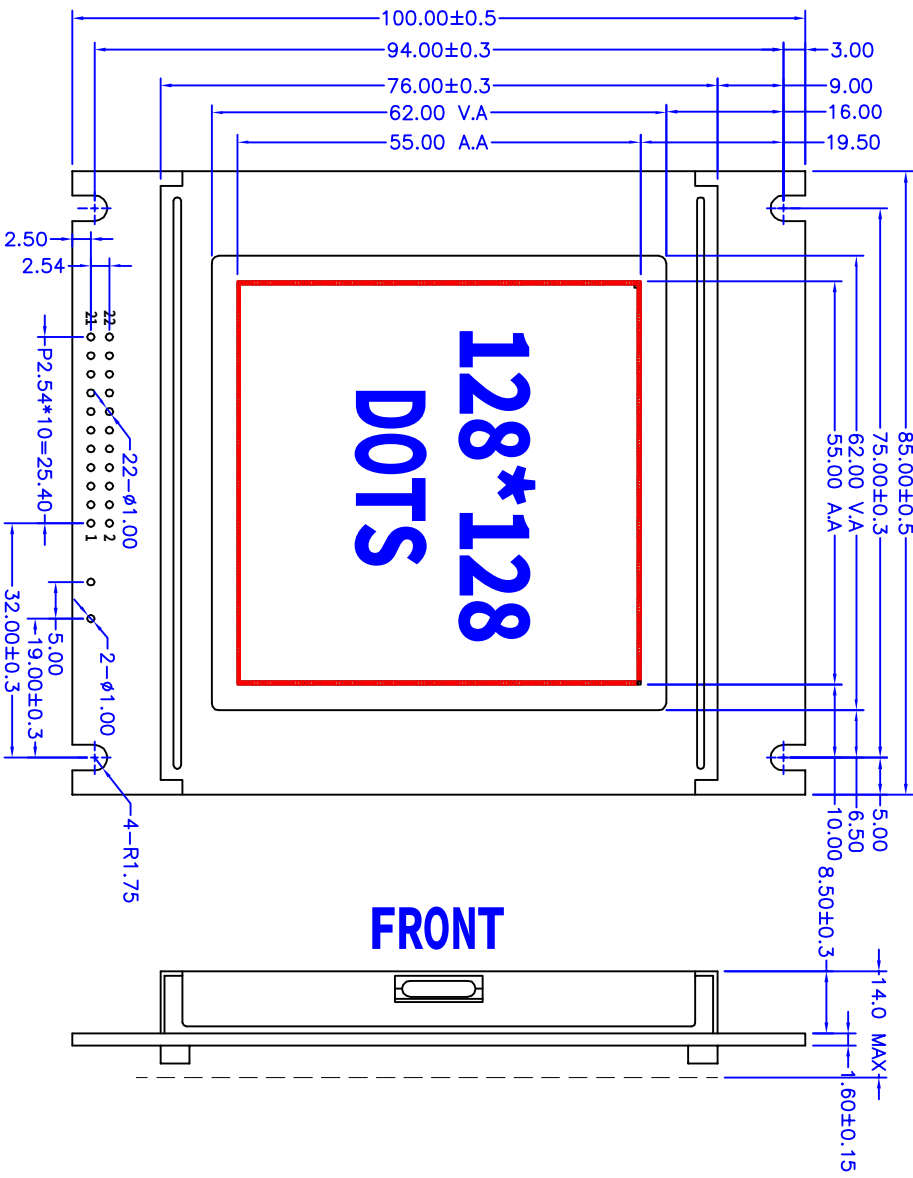

PIN	SYMBOL	Level	Function
1	VSS	0V	GND
2	VDD	+5V	Power supply for logic
3	V0	--	Operating voltage for LCD
4	D/I	H/L	Hi: Data L: Instruction code
5	R/W	H/L	Hi: READ L: WRITE
6	E	H,H->L	Enable signal
7	/RST	L	Reset signal ,Active "L"
8	DB0	H/L	Data bus line
9	DB1	H/L	
10	DB2	H/L	
11	DB3	H/L	
12	DB4	H/L	
13	DB5	H/L	
14	DB6	H/L	
15	DB7	H/L	Chip selection for IC1,Active "H"
16	CS1	H	
17	CS2	H	
18	CS3	H	Chip selection for IC2,Active "H"
19	CS4	H	Chip selection for IC3,Active "H"
20	VEE	--	LCD negative voltage supply
21	LED+	+5.0V	LED Positive voltage supply
22	LED-	0V	LED Negative voltage supply

NOTE:

DISPLAY TYPE : STN TRANSMISSIVE-NEGATIVE BLUE

VIEWING DIRECTION : 6: 00

OPERATING VOLT. : VOP=13.0V

OPERATING TEMP. : -20℃ ~ +70℃

STORAGE TEMP. : -30℃ ~ +80℃

DRIVE METHOD : 1/64 DUTY 1/9 BIAS VDD:5.0V

DRIVER : S6B0108,S6B0107

BACKLIGHT : LED WHITE 5.0V 80mA

ROHS COMPLANT.



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DESIGN	X H	070517	STANDARD			DRAWING No.: HG12812801C-b1621-VB
CHECKED			TECHNOLOGY			DRAWING TITLE: LCD MODULE
APPROVED			Q.A			FILE NO.: 8
						REV. : A
						PROJECTION: 
						SCALE : -
						UNIT : MM
						SHEET : 1/1