

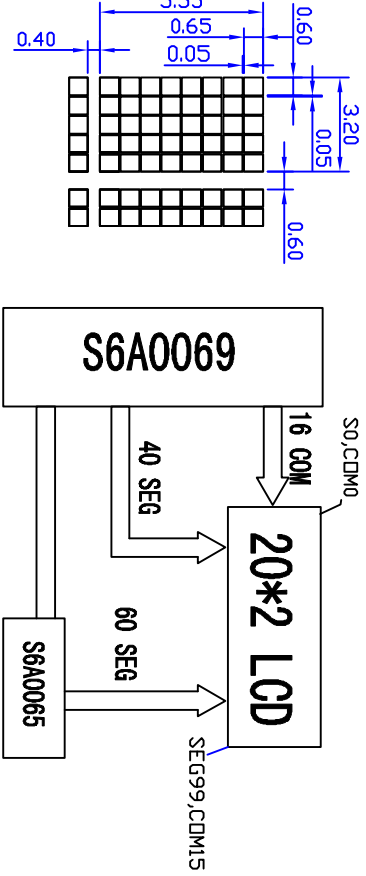


REV.	CHANGE CONTENT	BY	DATE

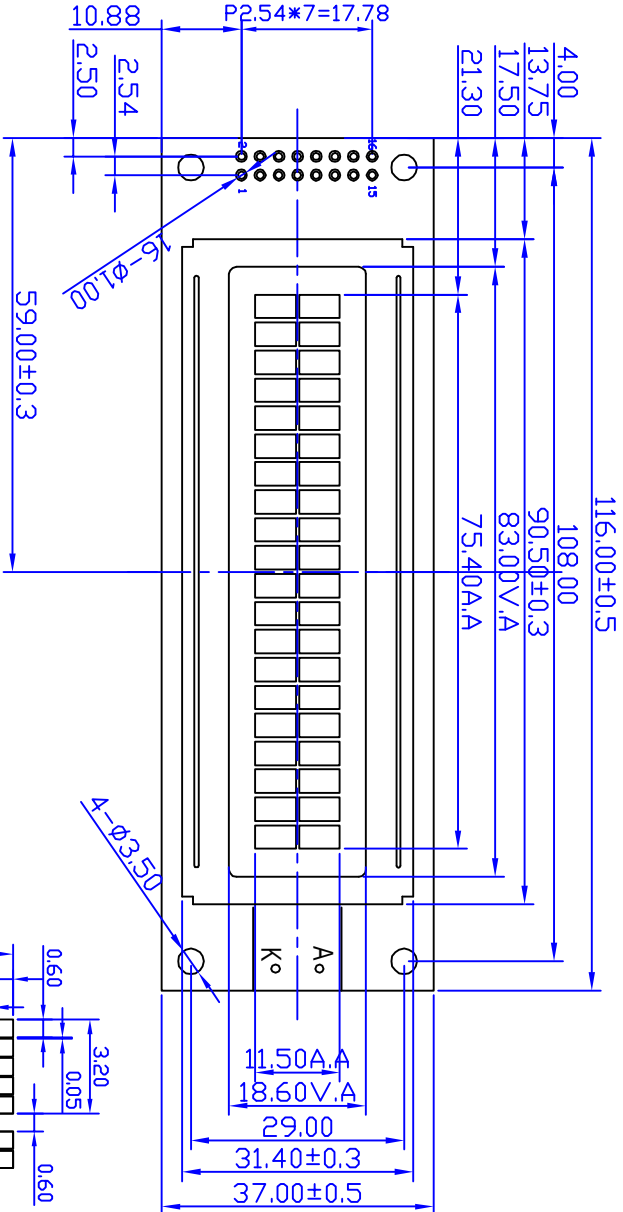

- NOTE:
1. DISPLAY TYPE: STN, POSITIVE, TRANSPARENT, Y-G
 2. VIEWING DIR: 6:00
 3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, Vop 4.5V VDD=5.0V
 4. DP TEMP: -20~70°C
 5. ST TEMP: -30~80°C
 6. DRIVER IC: S6A0069
 7. LED B/L: VF=5.0±0.2V, IF=280mA
- S6A0065
- COLOR: Y/G

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
SYMBOL	VSS	VDD	V0	RS	R/W	E	D0	D1	D2	D3	D4	D5	D6	D7	A	K

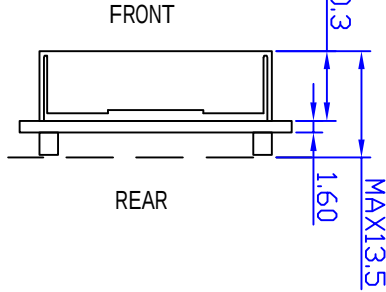

深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DESIGN	ZOUYS	06.10.29	STANDARD	REV. : A	SCALE : -
CHECKED			TECHNOLOGY		UNIT : mm
APPROVED			Q.A		SHEET : 1/1

DRAWING No. : HC200201C-YF62L-VA

DRAWING TITLE: LCM DRAWING

FILE NO. : 8

PROJECTION: 