



REV.	CHANGE CONTENT	BY	DATE

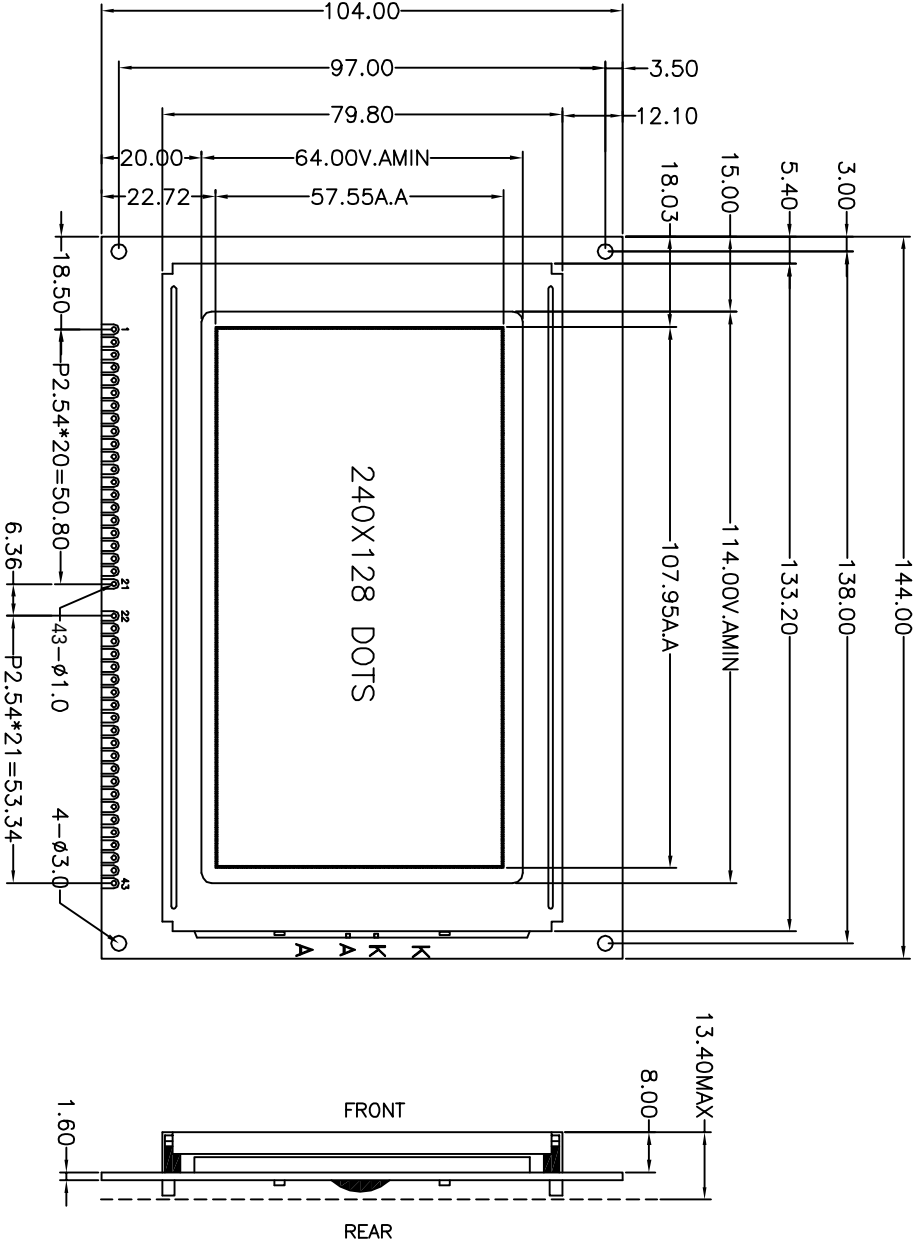

PIN NO.	1	2	3	4	5	6	7
Symbol	FG	VSS	VDD	V0	WR	RD	CE
PIN NO.	8	9	10-17	18	19	20	21
Symbol	C/D	RET	DB0-DB7	FS	VEE	LED+	LED-
PIN NO.	22	23	24	25	26-33	34	35
Symbol	LED-	LED+	VEE	FS	DB7-DB0	RET	NC
PIN NO.	36	37	38	39	40	41	42
Symbol	C/D	CE	RD	WR	V0	VDD	VSS
PIN NO.	43						
Symbol	FG						

NOTE: 1. Pin No.18 FS: FONT SELECT
FS=L,8X8 Character Font
FS=H,6X8 Character Font



NOTE:

- 1 DISPLAY TYPE : STN YELLOW/GREEN
- 2 VIEWING DIRECTION : 6 O'CLOCK
- 3 POLARIZER MODE : TRANSPARENT
- 4 DRIVE METHOD : 1/128 DUTY 1/12 BIAS
- 5 OPERATING VOLTAGE : 18.5V(FOR REFERENCE VOLTAGE)
- 6 OPERATING TEMP : -25°C--+70°C
- 7 STORAGE TEMP : -30°C--+80°C
- 8 CONNECTION : ZEBRA
- 9 BACKLIGHT: G5.0V,300mA
- 10 CONTROL CHIP: T6963C
11. LOGIC VOLTAGE: 5.0V



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DESIGN	LZM	06.6.13	STANDARD				
CHECKED			TECHNOLOGY				
APPROVED			Q.A				

DRAWING No.: HYG24012802C-YF621-VB
DRAWING TITLE: LCD MODULE
FILE NO.:
REV.: A
SCALE: -
UNIT: MM
SHEET: 1/1