



REV.	CHANGE CONTENT	BY	DATE

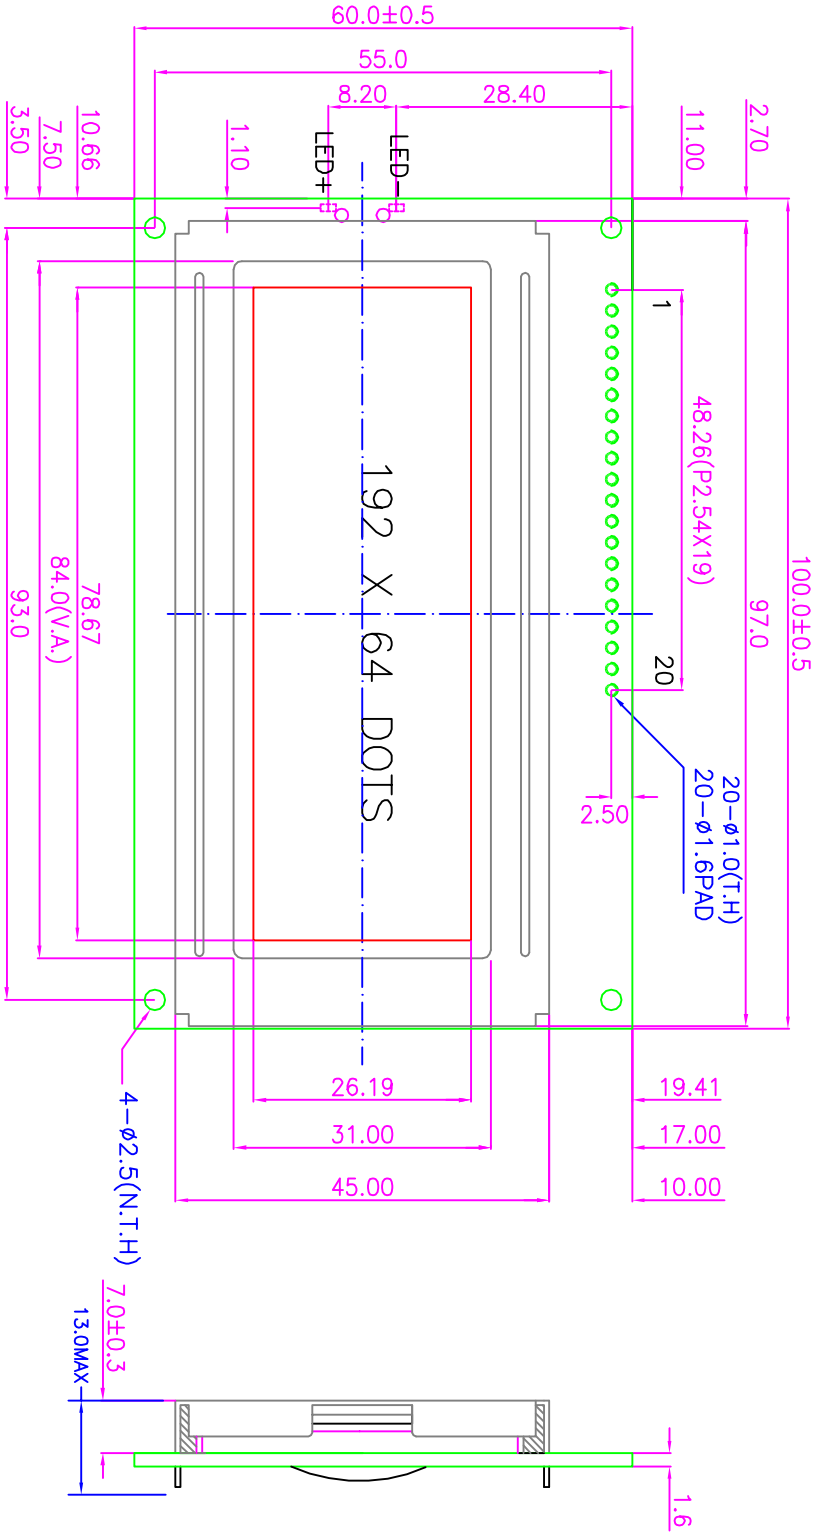

DOTS DETAIL

Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	E	R/W	RS	VO	VDD	VSS	CSB	CSA	VEE	RST	SLA	SLK

CSA	CSB	SELECTION
0	0	IC1
0	1	IC2
1	0	IC3
1	1	NONE

NOTE:

DISPLAY TYPE : STN TRANSMISSIVE-NEGATIVE-BLUE
VIEWING DIRECTION : 6: 00
OPERATING VOLT. : VOP=12.0V
OPERATING TEMP. : -25℃ ~ +75℃
STORAGE TEMP. : -30℃ ~ +80℃
DRIVE METHOD : 1/64 DUTY 1/9 BIAS VDD:5.0V
LED : COLOR:WHITE, Vf=5.0V, If=80mA
DRIVE IC : NT7108C/NT7107



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DESIGN	JHG	20100122	STANDARD	REV. :	SCALE : -
CHECKED			TECHNOLOGY	PROJECTION:	UNIT : MM
APPROVED			Q.A		SHEET : 1/1

DRAWING No. : HG1926404C-b162L-VD
DRAWING TITLE : LCM
FILE NO.: 8