


REV.	CHANGE CONTENT	BY	DATE

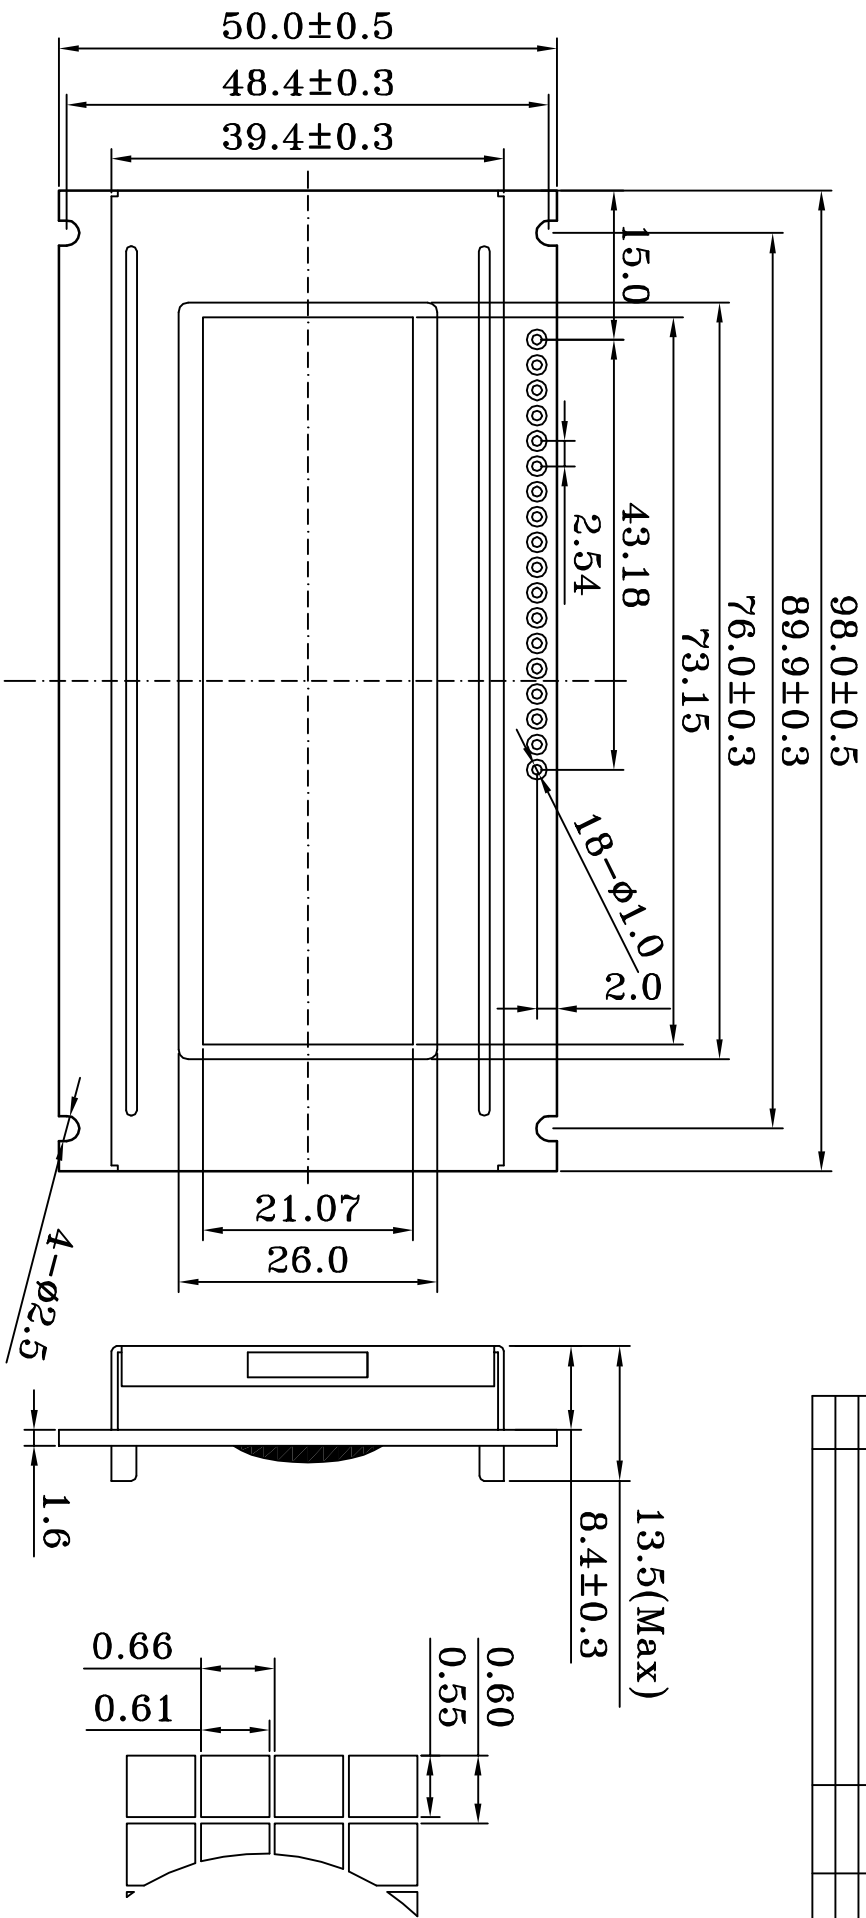

PIN No	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Symbol	VSS	VDD	VO	A0	R/W	E1	E2	NC	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

NOTES:

1. DISPLAY TYPE: STN
2. DISPLAY MODE: TRANSPARENT-POSITIVE
3. VIEWING DIRECTION: 6 O'CLOCK
4. VDD: 5.0 V
5. OPERATING TEMP: -20°C TO 70°C
6. DRIVER IC: PT6520(CDB)
7. DRIVER METHOD: 1/32 DUTY 1/7 BIAS VDP:7.5V
8. BACK LIGHT: LED V/G,180mA 4.2V



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DESIGN LI JINTANG (05.07.13) STANDARD

CHECKED

APPROVED

DRAWING No.: HGI223201C-YF62L-VA

DRAWING TITLE: LCD MODULE

FILE NO.: 8

REV.:

PROJECTION:

SCALE:

UNIT: MM

SHEET: 1/1