




REV.	CHANGE CONTENT	BY	DATE

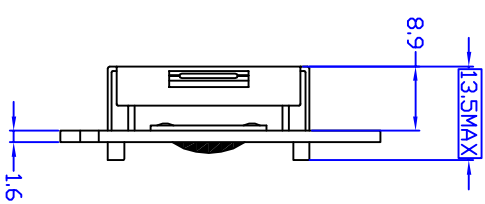

PIN No	1	2	3	4	5	6	7	8-15	16	17	18
Symbol	VSS	VDD	V0	A0	E1	E2	RW	DB0-DB7	/RST	LEDA	LEDK

- Note:
- 1.Display Mode:STN,Y/G, POSITIVE, Transflective
 - 2.View Direction:6 O'Clock
 - 3.Driver Method :1/32 Duty,1/4Bias
 - 4.LCD Operating Voltage :5.0V
 - 5.Operating Temperature :-20° C- 70° C
 - 6.Storage Temperature :-30° C- 80° C
 - 7.Controller :SBN1661G-M18 COB OR EQU
 - 8.LED :COLOR:YELLOW-GREEN 底光5.0V
- THE DIMENSION IN FRAME IS CRITICAL TO QUALITY

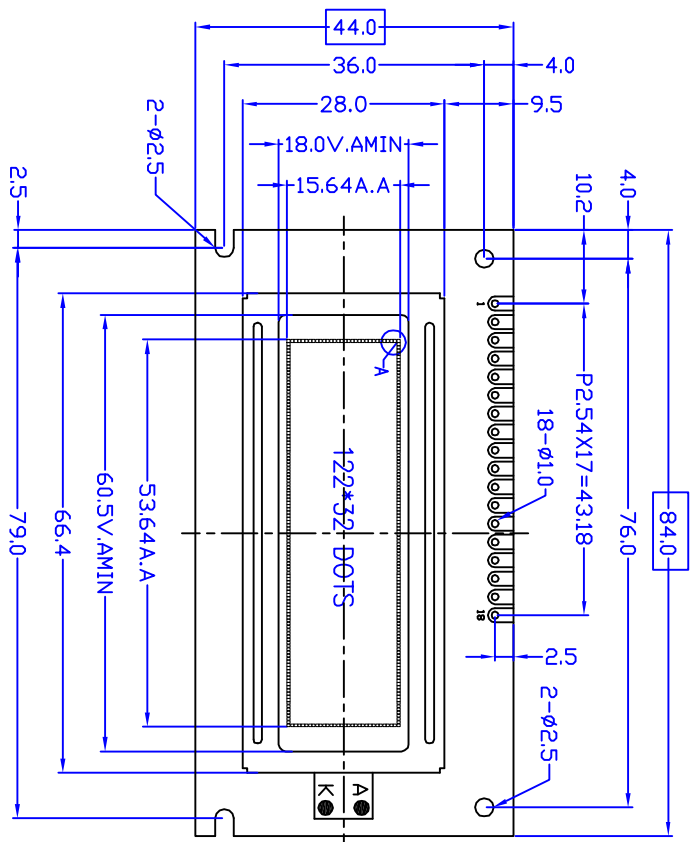

深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DESIGN	LZM	06.08.05	STANDARD	
CHECKED			TECHNOLOGY	
APPROVED			Q.A	

DRAWING No.: HGI223205C-YF62L-VA
DRAWING TITLE: LCD MODULE
FILE NO.: 8

REV.: A
PROJECTION: 
SCALE: -
UNIT: MM
SHEET: 1/1