
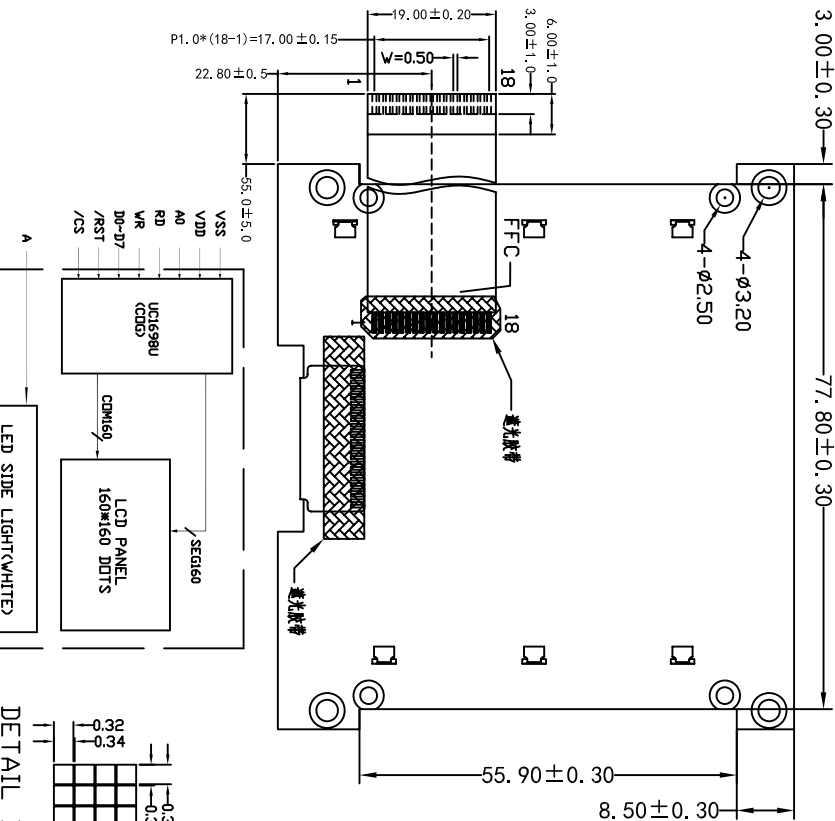


REV.	DESCRIPTION	BY	DATE

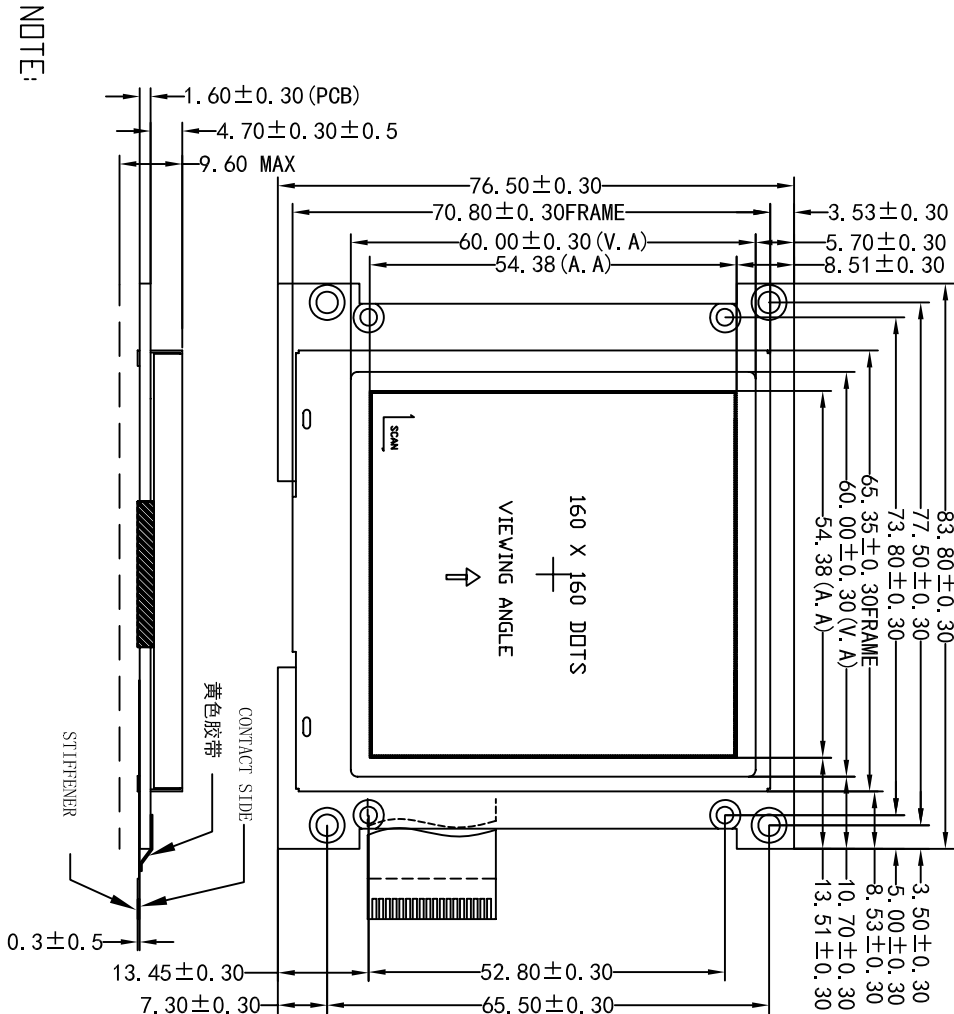

NOTE:

1. OPERATING TEMPERATURE:-25°C TO 70°C
STORAGE TEMPERATURE:-30°C TO 80°C
2. LCD MODEL: FSTN/POSITIVE/TRANSPARENT
3. 1/160 DUTY, 1/10 BAIS, V_{LCD}=16.5V, V_{DD}=3.3V
4. VIEWING ANGLE: 6:00 O'CLOCK
5. BACKLIGHT: WHITE LED
V_F=4.7V IF=50~70mA
6. ROHS COMPLIANT

FFC ASSIGNMENT:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
VSS	AO	WR	RD	XCS	RESET	VDD	D0	D1	D2	D3	D4	D5	D6	D7	K	NC	A

深圳市华远显示器件有限公司

DESIGN	邓安平	20091118	TECHNOLOGY	REV. : A	SCALE : -
CHECKED			Q.A	PROJECTION:	UNIT : MM
STANDARD			APPROVED		SHEET : 1/1

DRAWING NO.: HYG16016002G-FF62L-VE
DRAWING TITLE: LCM
FILE NO.: 7