

1

2

3

4


5

6

7

8


REV.	CHANGE CONTENT	BY	DATE
B	更改PCB尺寸和固定孔位置	DAP	110105

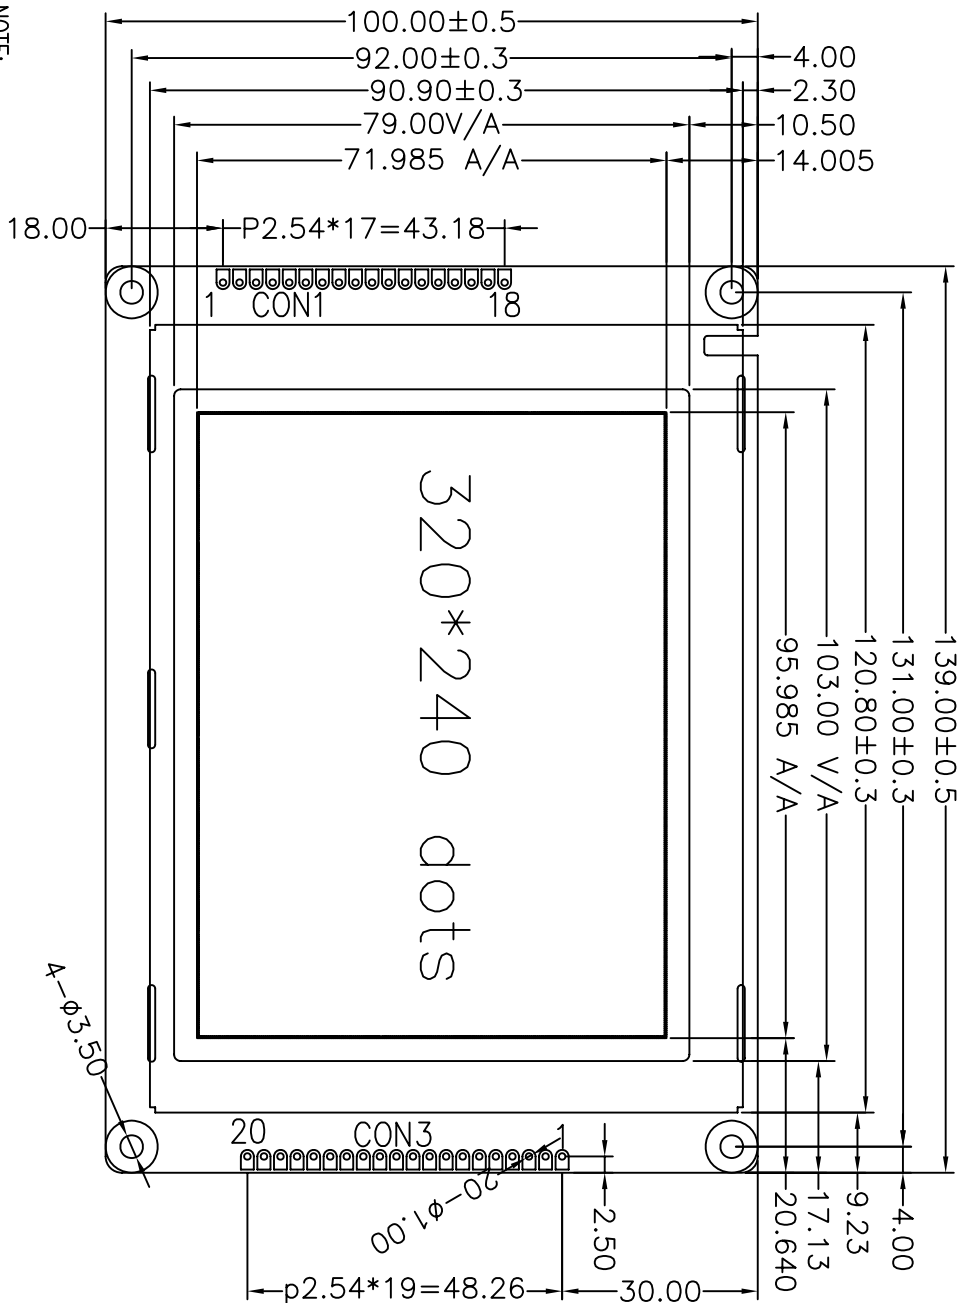

CON2		CON1	
PIN NO.	NAME	NAME	
1	VSS	VSS	
2	VDD	VDD	
3	V0	V0	
4	/WR	/WR	
5	/RD	/RD	
6	/CS	/CS	
7	A0	A0	
8	/RST	/RST	
9	DB0	DB0	
10	DB1	DB1	
11	DB2	DB2	
12	DB3	DB3	
13	DB4	DB4	
14	DB5	DB5	
15	DB6	DB6	
16	DB7	DB7	
17	NC	LEDA	
18	VEE	VEE/LEDK	
19	LEDA		
20	LEDK		

NOTE:

- 1 DISPLAY TYPE : STN NEGATIVE
- 2 VIEWING DIRECTION : 6 O'CLOCK
- 3 POLARIZER MODE : TRANSMISSIVE
- 4 DRIVE METHOD : 1/240 DUTY 1/14 BIAS, Vop=21.0V
- 5 OPERATING VOLTAGE : VDD=5.0V
- 6 OPERATING TEMP : -20°C~70°C
- 7 STORAGE TEMP : -30°C~80°C
- 8 BACKLIGHT: WHITE 5.0V < 200mA WHITE
- 9 CONTROL CHIP: RA835AP3N
- 10 ENVIRONMENTAL SAFE STANDARD: ROHS
- 11 没标注的公差为±0.5mm



深圳市华远显示器件有限公司



DESIGN	DAP	20101026	STANDARD	REV. : A	SCALE : -
CHECKED			TECHNOLOGY	PROJECTION:	UNIT : MM
APPROVED			Q. A		SHEET : 1/1

DRAWING No.: HYG32024028G-b162L-VA

DRAWING TITLE: LCM

FILE NO.: 7