

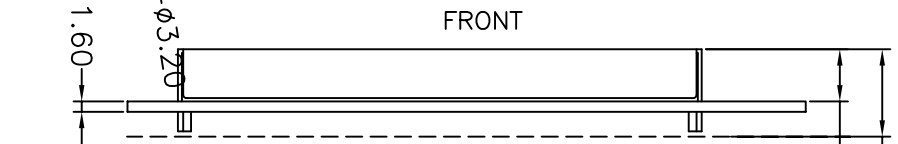


REV.	CHANGE CONTENT	BY	DATE

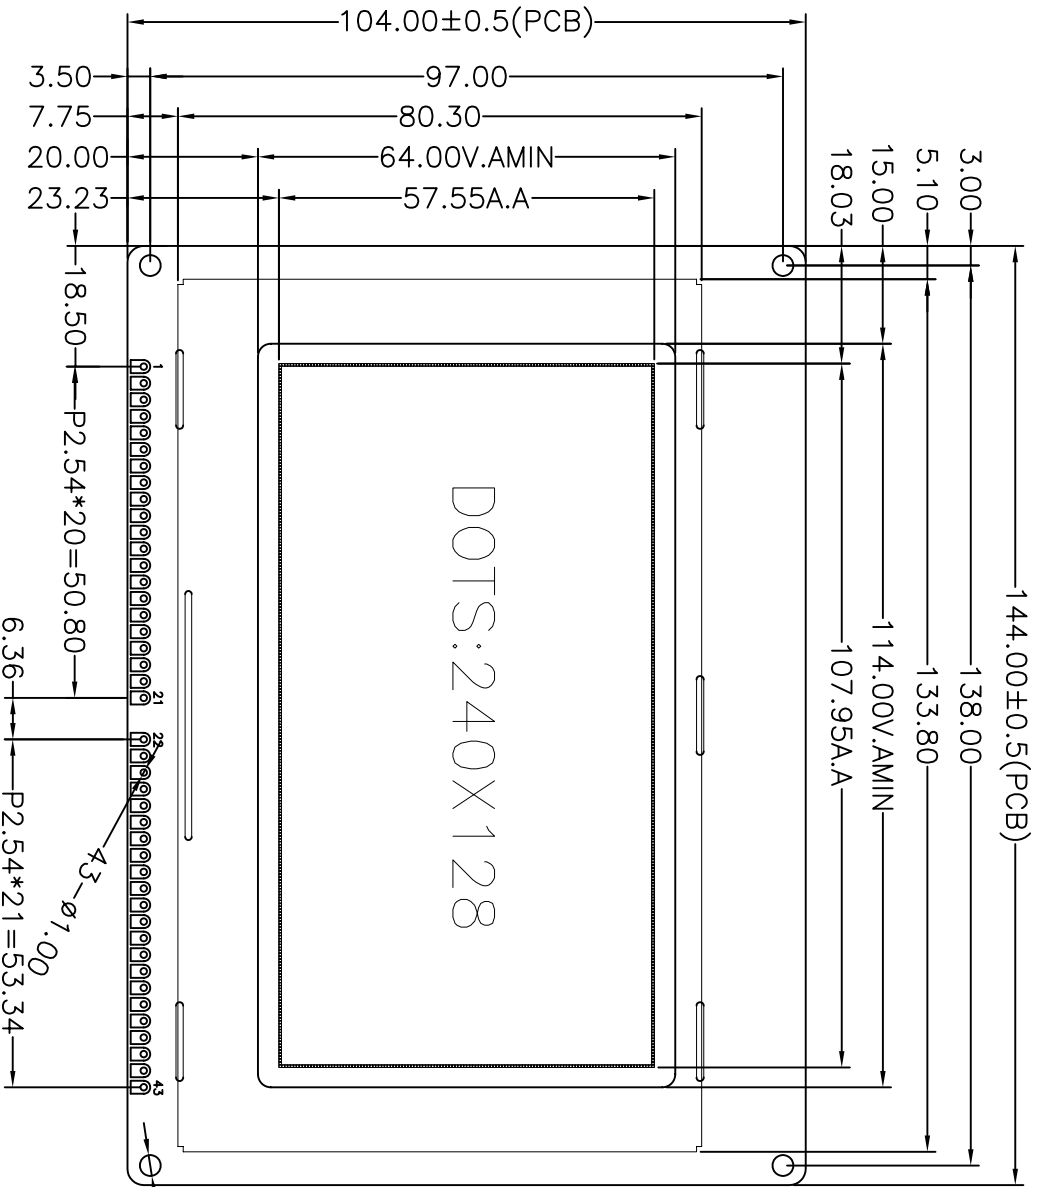

PIN NO.	NAME	PIN NO.	NAME
1	FG	43	FG
2	VSS	42	VSS
3	VDD	41	VDD
4	V0	40	V0
5	/MR	39	/MR
6	/RD	38	/RD
7	/CS	37	/CS
8	C/D	36	C/D
9	/RST	35	NC
10	DB0	34	/RST
11	DB1	33	DB0
12	DB2	32	DB1
13	DB3	31	DB2
14	DB4	30	DB3
15	DB5	29	DB4
16	DB6	28	DB5
17	DB7	27	DB6
18	NC	26	DB7
19	VEE	25	NC
20	LED+	24	VEE
21	LED-	23	LED+
		22	LED-



NOTE:

1. DISPLAY TYPE : STN-NEGATIVE-BLUE-TRANSMISSIVE
2. VIEWING DIRECTION : 6: 00
3. OPERATING VOLT. : VDD=5.0V
4. OPERATING TEMP. : -20°C~+70°C
5. STORAGE TEMP. : -30°C~+80°C
6. DRIVE METHOD : 1/128DUTY, 1/12BIAS, VOP=16.0V
7. BACKLIGHT : LED(white) ILED<160mA Vf:5.0V
8. CONTROLLER : UC1698U

NOTE: 1. Pin No.18 FS: FONT SELECT

FS=L,8X8 Character Font



深圳市华远显示器件有限公司

DESIGN	郑安平	20100915	STANDARD		
CHECKED			TECHNOLOGY		
APPROVED			Q. A		

DRAWING No.: HYG24012837G-6162L-VA
DRAWING TITLE: LCM
FILE NO.: 7

REV. : A	SCALE : -
PROJECTION:	UNIT : MM
SHEET : 1/1	