
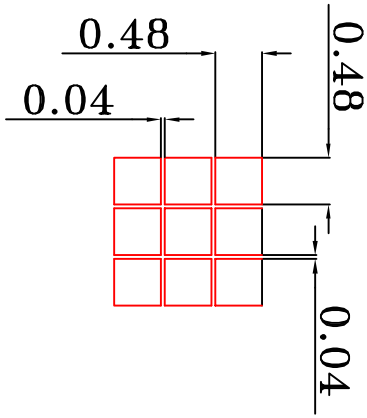
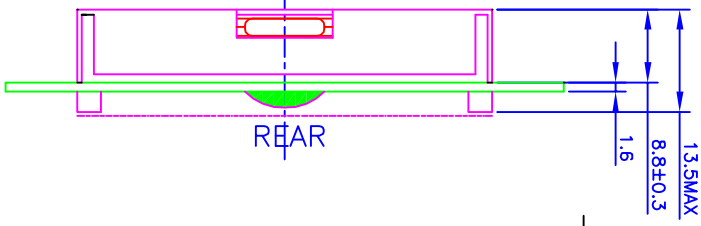


REV.	CHANGE CONTENT	BY	DATE

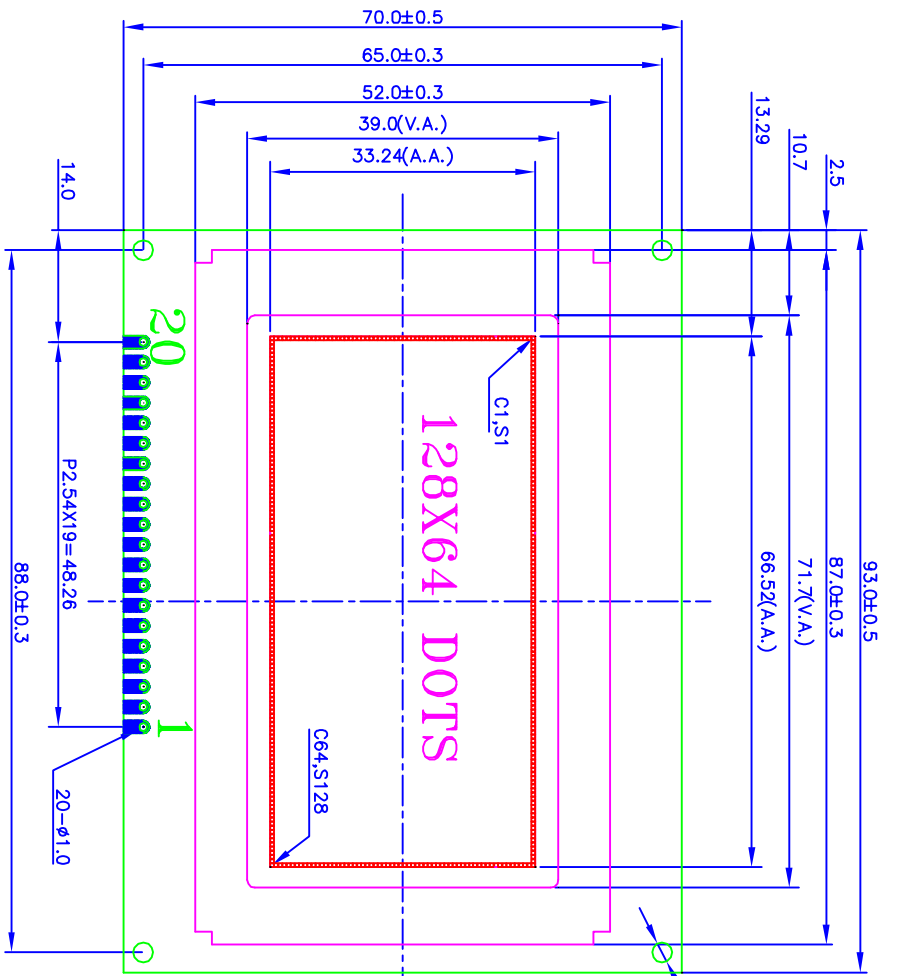

E NOTE:

1. DISPLAY TYPE : FSTN – NEGATIVE – TRANSMISSIVE
2. VIEWING DIRECTION : 6:00
3. OPERATING VOLT. : $V_{op} = 11.0V$
4. OPERATING TEMP. : $-20^{\circ}C \sim +70^{\circ}C$
5. STORAGE TEMP. : $-30^{\circ}C \sim +80^{\circ}C$
6. DRIVE METHOD : 1/64 Duty, 1/9Biases
7. LED BACKLIGHT : Orange, Bottom-Light, VLED = 5.0V
8. POWER SUPPLY FOR LOGIC : VDD=5.0V
9. DRIVE IC: SBN0064G, SBN6400G

PIN NO.	1	2	3	4	5	6	7~14	15	16	17	18	19	20
SYMBOL	Vss	VDD	V0	RS	R/W	E	DB0~DB7	CS1	CS2	/RST	VEE	BL+	BL-

LCD PIN	IC PIN
C1~C64	IC1:C1~C64
S1~S64	IC2:S1~S64
S65~S128	IC3:S1~S64

深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DESIGN JHG
CHECKED
APPROVED

20080728 STANDARD
TECHNOLOGY
Q.A

REV. : A
SCALE : -
UNIT : MM
SHEET : 1/1

DRAWING No. : H61286406C-YF62L-VAG
DRAWING TITLE: LCM DRAWING
FILE NO.: 8