

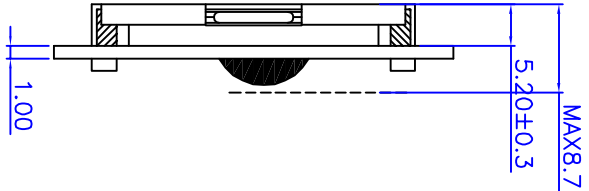


REV.	CHANGE CONTENT	BY	DATE

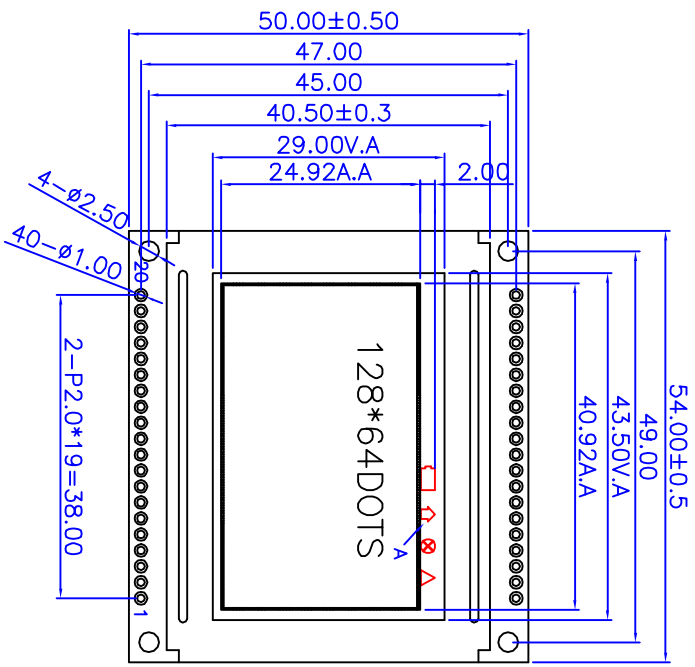

DETAIL OF A

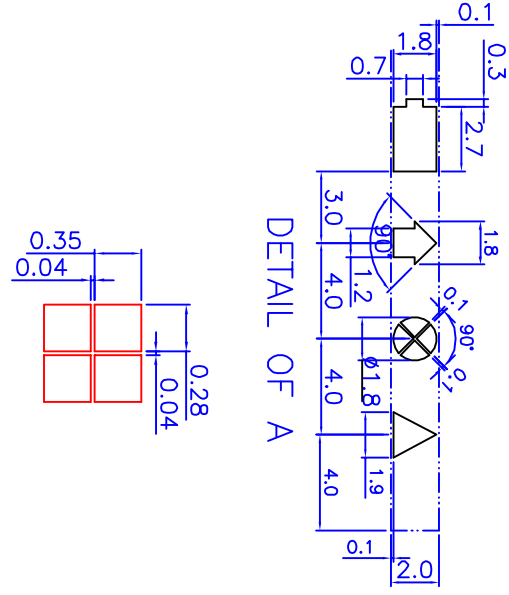

PIN NO.	1	2	3	4	5	6	7~14	15	16	17	18	19	20
SYMBOL	Vss	VDD	V0	D/I	R/W	E	DB0~DB7	CS1	CS2	/RST	VEE	BL+	BL-

NOTE:

DISPLAY TYPE : STN TRANSFLECTIVE-POSITIVE-Y/G
VIEWING DIRECTION: 6: 00
OPERATING VOLT. : VOP=10.5V
OPERATING TEMP. : -20℃ ~ +70℃
STORAGE TEMP. : -30℃ ~ +80℃
DRIVE METHOD : 1/64 DUTY 1/9 BIAS VDD:3.3V
LED : Green Vf=3.2±0.2V, If=20mA
DRIVER IC : S6B0107,S6B0108*2

 华远显示 H·Y·D·I·S·P·L·A·Y 深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD										DRAWING No. : HG1286413C-YF62L-VL			
DRAWING TITLE: LCD MODULE													
DESIGN	DAP	07.04.30	STANDARD			REV. : B	SCALE : -						
CHECKED			TECHNOLOGY			PROJECTION:	UNIT : MM						
APPROVED			Q.A.				SHEET : 1/1						