

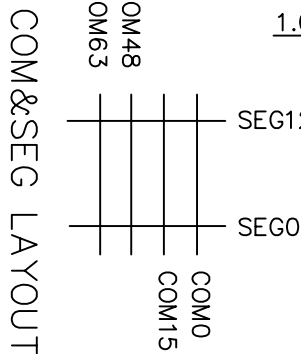
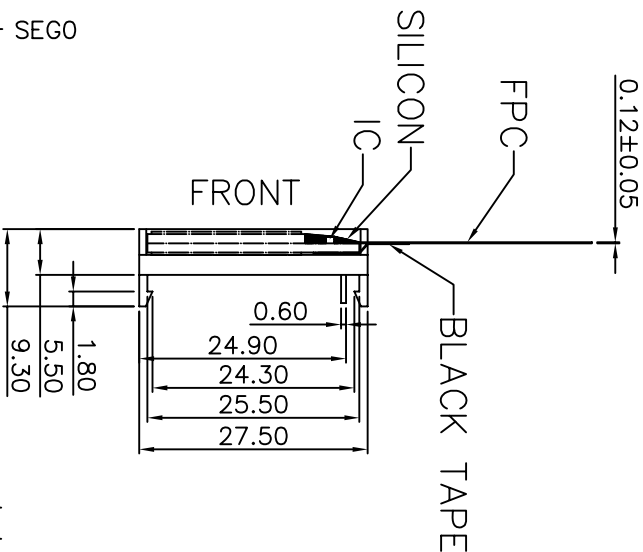



REV.	CHANGE CONTENT	BY	DATE

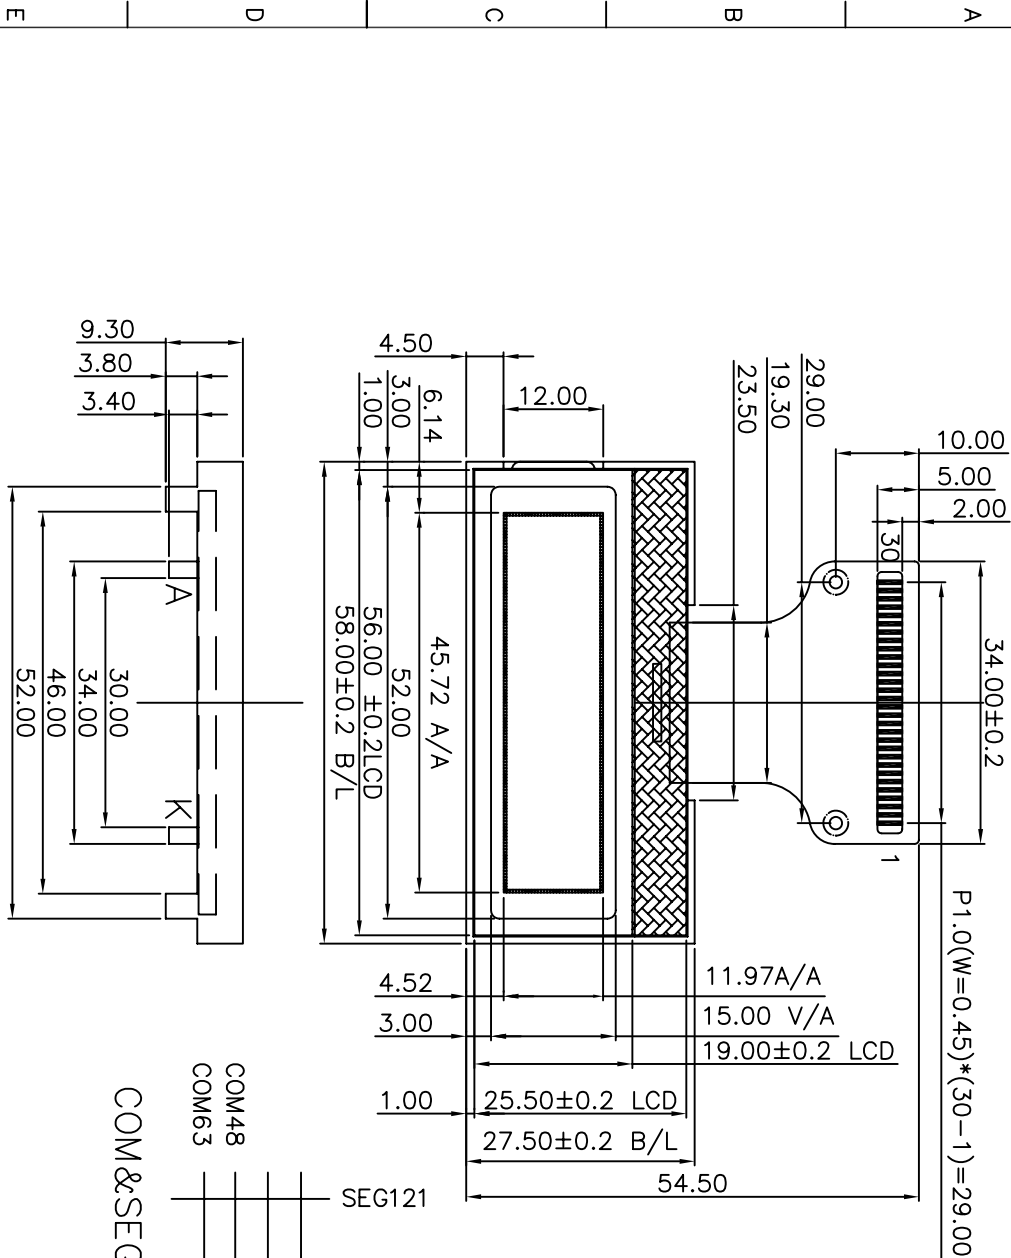

PIN	1	2	3	4	5	6	7	8	9	10
NAME	PS	C68	VR	V0	V1	V2	V3	V4	C2-	C2+
PIN	11	12	13	14	15	16	17	18	19	20
NAME	C1+	C1-	C3+	NC	VOU	VSS	VDD	DB7	DB6	DB5
PIN	21	22	23	24	25	26	27	28	29	30
NAME	DB4	DB3	DB2	DB1	DB0	E-RDRW	WRRS	RES	CS1	

NOTES:

1. DISPLAY TYPE: STN TRANSPARENT, POSITIVE, YELLOW-GREEN.
2. DRIVE METHOD: DUTY=1/33, BIAS=1/6, VDD=3.3V, VOP=6.5V.
3. VIEWING DIRECTION: 6 O'CLOCK.
4. IC DRIVER: ST7565R
5. OPERATING TEMP: -20°C~70°C.
6. STORAGE TEMP: -30°C~80°C.
7. BACKLIGHT: EDGE BACKLIGHT YELLOW-GREEN VF=4.0V±0.1,ILED=20mA
8. UNMARKED TOLERANCE: ±0.2mm.
9. ROHS.



华远显示

深圳市华远显示器件有限公司

DRAWING No.:HYG1223247G-YF02L-VA

DRAWING TITLE: LCM

FILE NO.: 6

DESIGN	DAP	20101018	STANDARD	REV.: A	SCALE: -
CHECKED			TECHNOLOGY	PROJECTION:	UNIT: mm
APPROVED			Q.A		SHEET: 1/1