

REV.	CHANGE CONTENT	BY	DATE
B	根据客样设计	DAP	110111

A

B

C

D

E

F

A


B

C

D

E

F

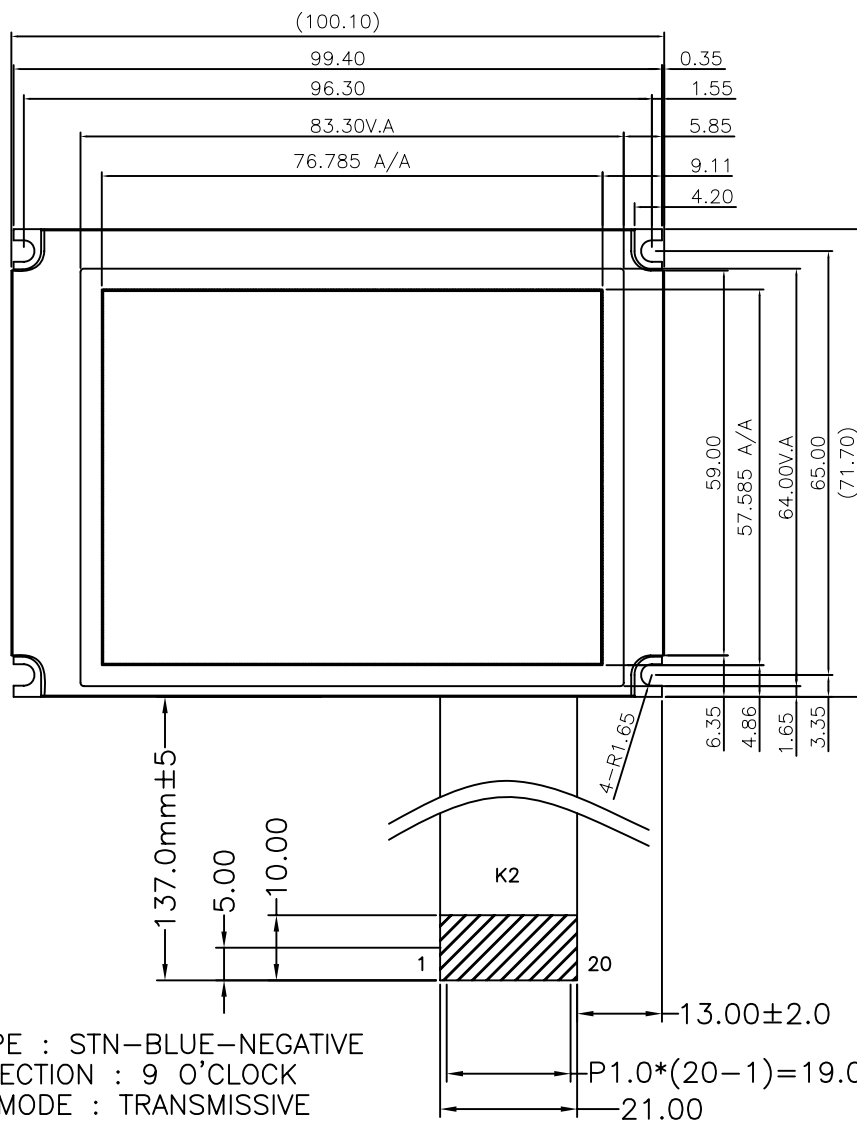

NOTE:

1. DISPLAY TYPE : STN-BLUE-NEGATIVE
2. VIEWING DIRECTION : 9 O'CLOCK
3. POLARIZER MODE : TRANSMISSIVE
4. DRIVER MTHOD : 1/240DUTY, 1/16BIAS
5. OPERATING VOLTAGE : VOP=22.5V
6. OPERATING TEMP.: -10°C~+60°C
7. STORAGE TEMP.: -20°C~+70°C
8. ROHS COMPLIANT
9. BACKLIGHT : WHITE,5V@120mA
10. LCD CONTROLLER: RA8803
11. ROHS COMPLIANT





华远显示

深圳市华远显示器件有限公司

DESIGN	DAP	20100716	STANDARD		
CHECKED			TECHNOLOGY		
APPROVED			Q. A		

DRAWING No.: HYG32024025G-bT91L-VA
DRAWING TITLE: LCM
FILE No.: 7

REV. : A	SCALE : -
PROJECTION:	UNIT : MM
	SHEET : 1/1

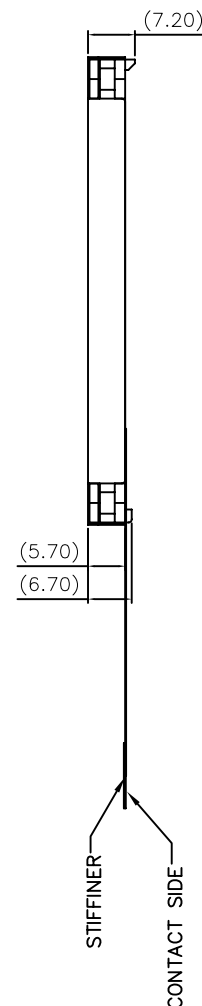

K2

PIN NO.	NAME
1	VSS
2	VDD
3	V0
4	/WR
5	/RD
6	/CS
7	A0
8	/RST
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	BUSY
18	VOUT
19	LEDA
20	LEDK

STIFFENER

CONTACT SIDE