

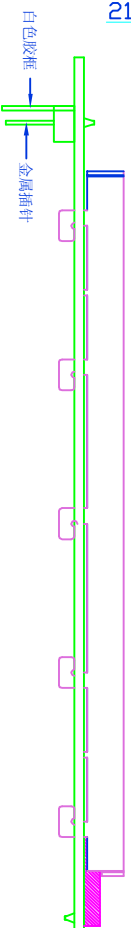


REV.	CHANGE CONTENT	BY	DATE



PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
SYMBOL	GND	VCC	V0	/WR	/RD	/CS	A0	/RST	D0	D1	D2	D3	D4	D5	D6	D7	RL-E	VOUT

- NOTE:
1. DISPLAY TYPE: STN/Y-G/TRANSMISSIVE/POSITIVE.
 2. DRIVE METHOD: DUTY=1/160, BIAS=1/12, VOP=17.5V, VDD=5.0V.
 3. VIEWING DIRECTION: 6 O'CLOCK.
 4. OPERATING TEMP: -20°C~70°C.
 5. STORAGE TEMP: -30°C~80°C.
 6. BACKLIGHT: GREEN-LED, Vf=5.0V, If=45mA(TYP)
 7. CONTROLLER IC: RA8835P3N

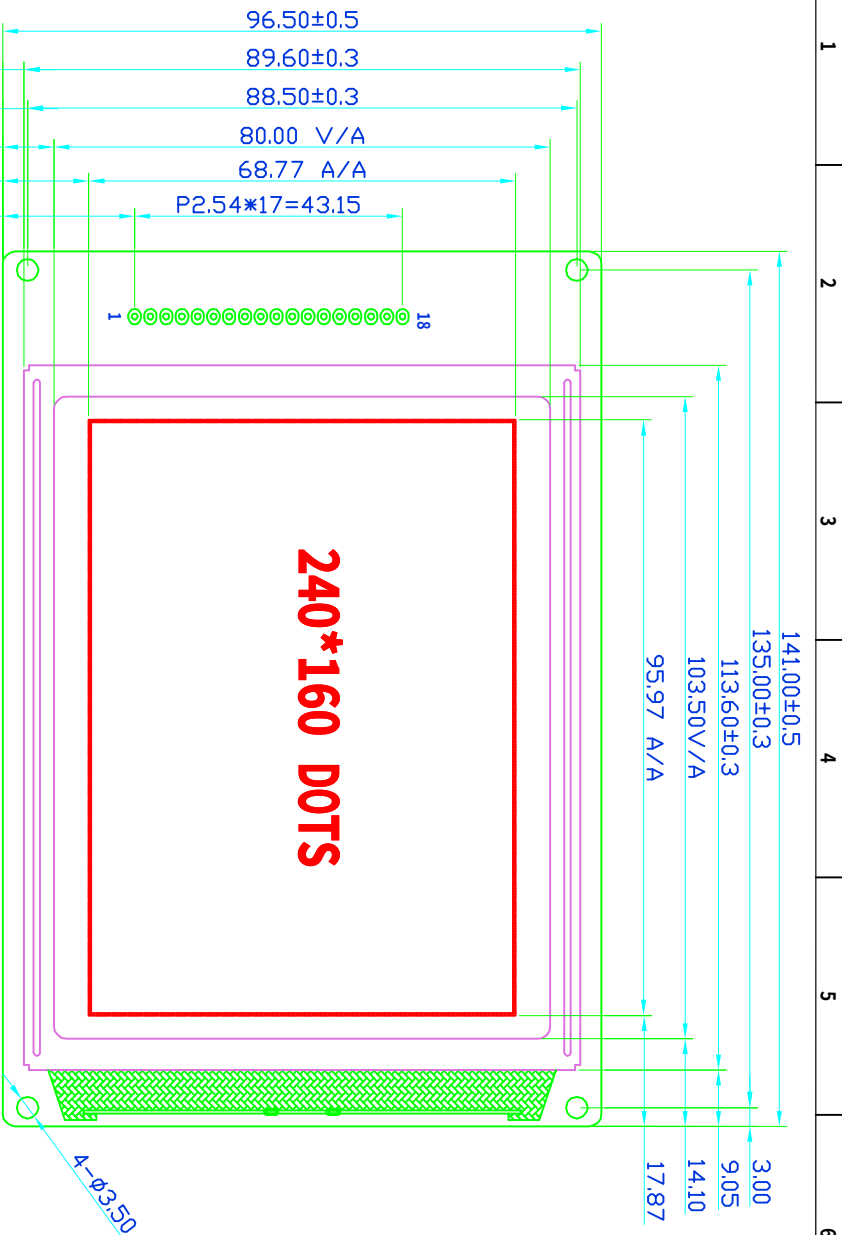

深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No.: HYG24016007C-YT62L-VA

DRAWING TITLE: LCM

FILE NO.:7

DESIGN	DAP	10.08.03	STANDARD	REV. : A	SCALE : 1:1
CHECKED			TECHNOLOGY		UNIT : mm
APPROVED			Q.A		SHEET : 1/1