



REV.	DESCRIPTION	BY	DATE

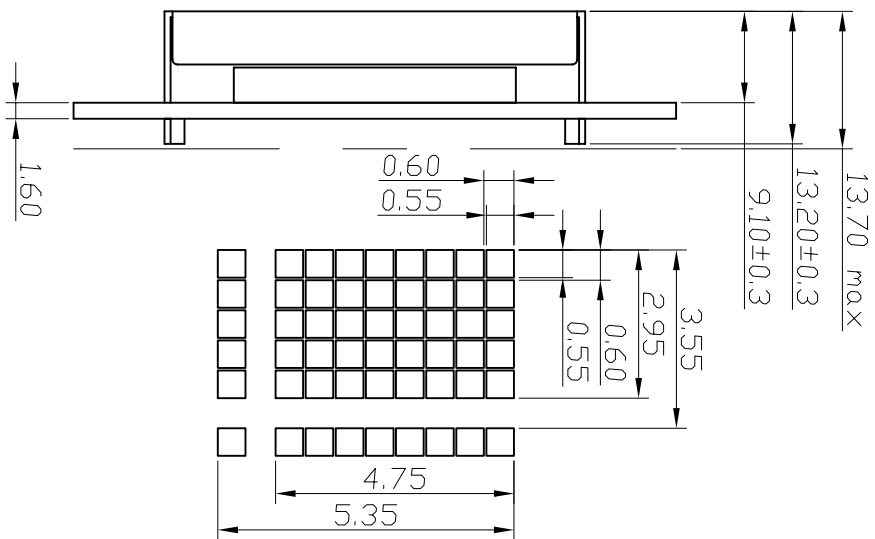

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
SYMBOL	VSS	VDD	VD	RS	R/W	E	D0	D1	D2	D3	D4	D5	D6	D7	LED+	LED-

- NOTE:
1. DISPLAY TYPE: STN-BLUE-NEGATIVE
 2. DISPLAY MODE: TRANSMISSIVE,ANTI-UV
 3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, 4.5V Vop, 3.3V VDD
 4. VIEWING DIR.: 6:00
 5. OP. TEMP.: -20°C~70°C
 6. ST. TEMP.: -30°C~80°C
 7. BACKLIGHT: COLOR-WHITE, Vf=3.3V,If=45mA
 8. DRIVER IC:ST7066,ST7063*2

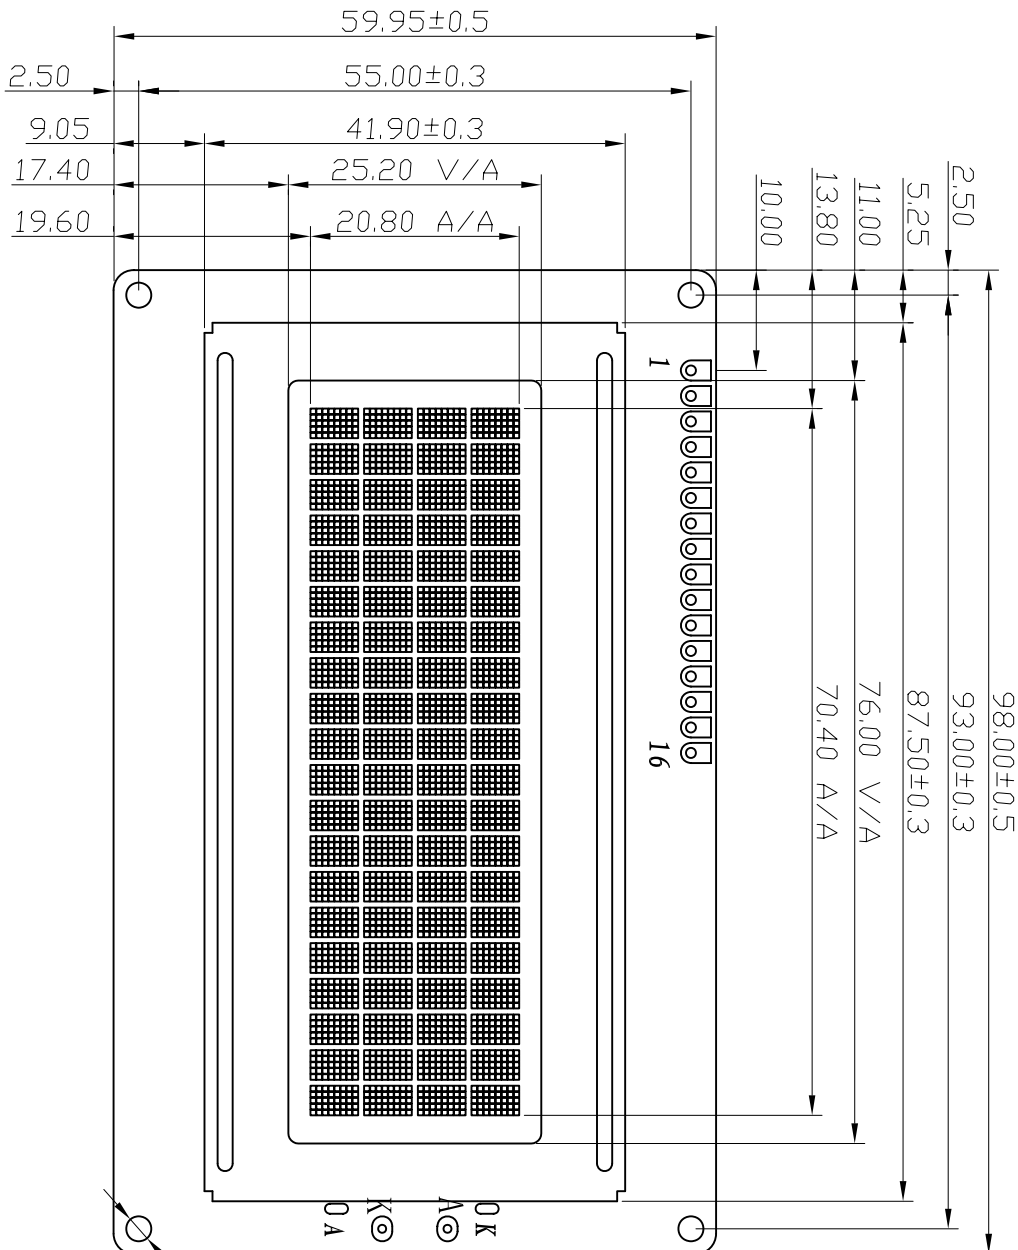

华远显示

深圳市华远显示器件有限公司

DESIGN	DAP	20110830	TECHNOLOGY	Q.A	APPROVED	REV. : A	SCALE : -
CHECKED						PROJECTION:	UNIT : MM
STANDARD							SHEET : 1/1

DRAWING No.: HYC200401C-VA
DRAWING TITLE: LCM
FILE NO.: 8