


REV.	CHANGE CONTENT	BY	DATE

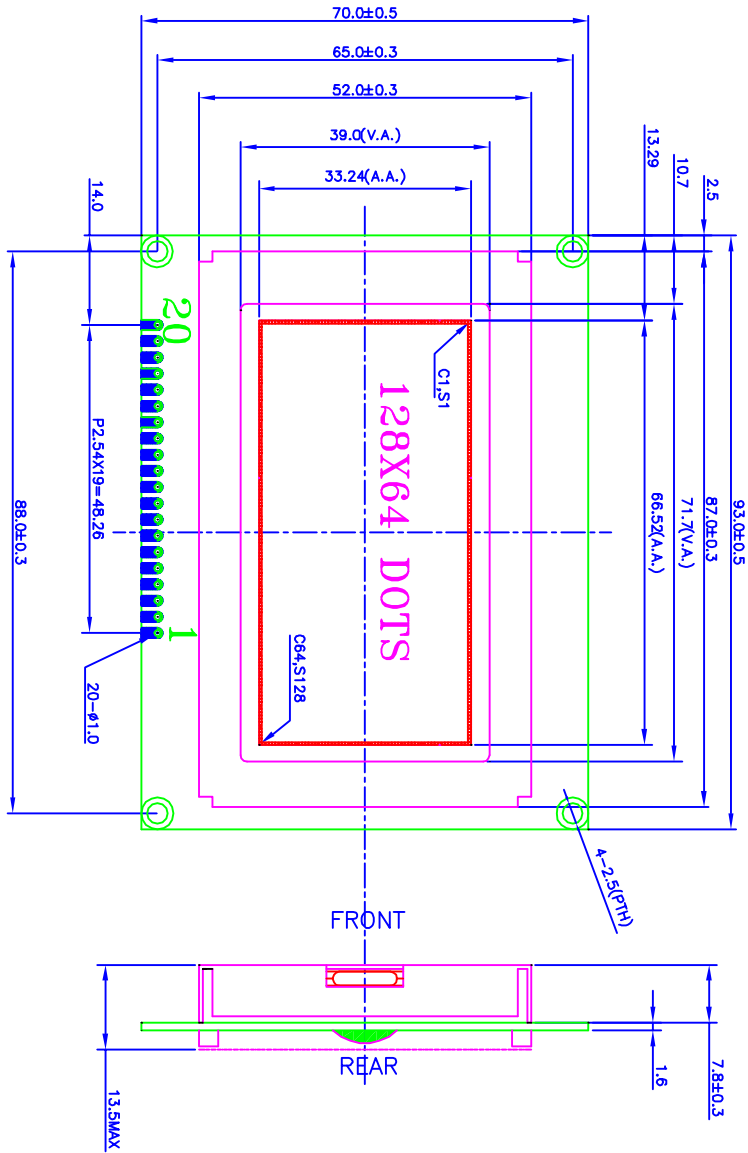

PIN NO.	1	2	3	4	5	6	7~14	15	16	17	18	19	20
SYMBOL	VSS	VDD	V0	RS	R/W	E	DB0~DB7	CS1	CS2	/RST	VEE	BL+	BL-

LCD PIN	IC PIN
C1~C64	IC1-C1~C64
S1~S64	IC2-S1~S64
S65~S128	IC3-S1~S64

NOTE:

DISPLAY TYPE : STN TRANSMISSIVE-NEGATIVE-BLUE
 VIEWING DIRECTION : 6: 00
 OPERATING VOLT. : VOP=11V
 OPERATING TEMP. : -20℃ ~ +70℃
 STORAGE TEMP. : -30℃ ~ +80℃
 DRIVE METHOD : 1/64 DUTY 1/9 BIAS VDD:5.0V
 LED : COLOR:WHITE VLED=5.0V
 DRIVE IC : S6B0108 OR EQU.
或:1/6 baies 8. 4V



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DESIGN	JHG	20091113	STANDARD
CHECKED			TECHNOLOGY
APPROVED			Q.A

DRAWING No. :HG1286436C-b162L-VC
 DRAWING TITLE: LCM
 FILE NO.: 8

REV. : A	SCALE : -
PROJECTION:	UNIT : MM
SHEET : 1/1	