

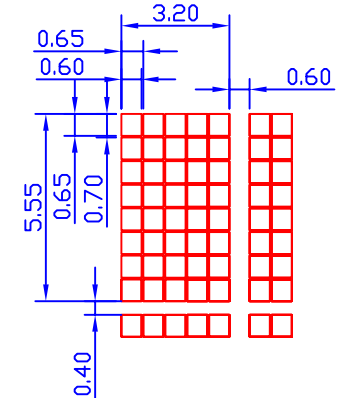
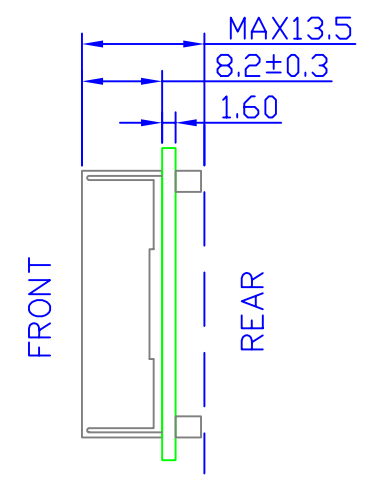


REV.	CHANGE CONTENT	BY	DATE

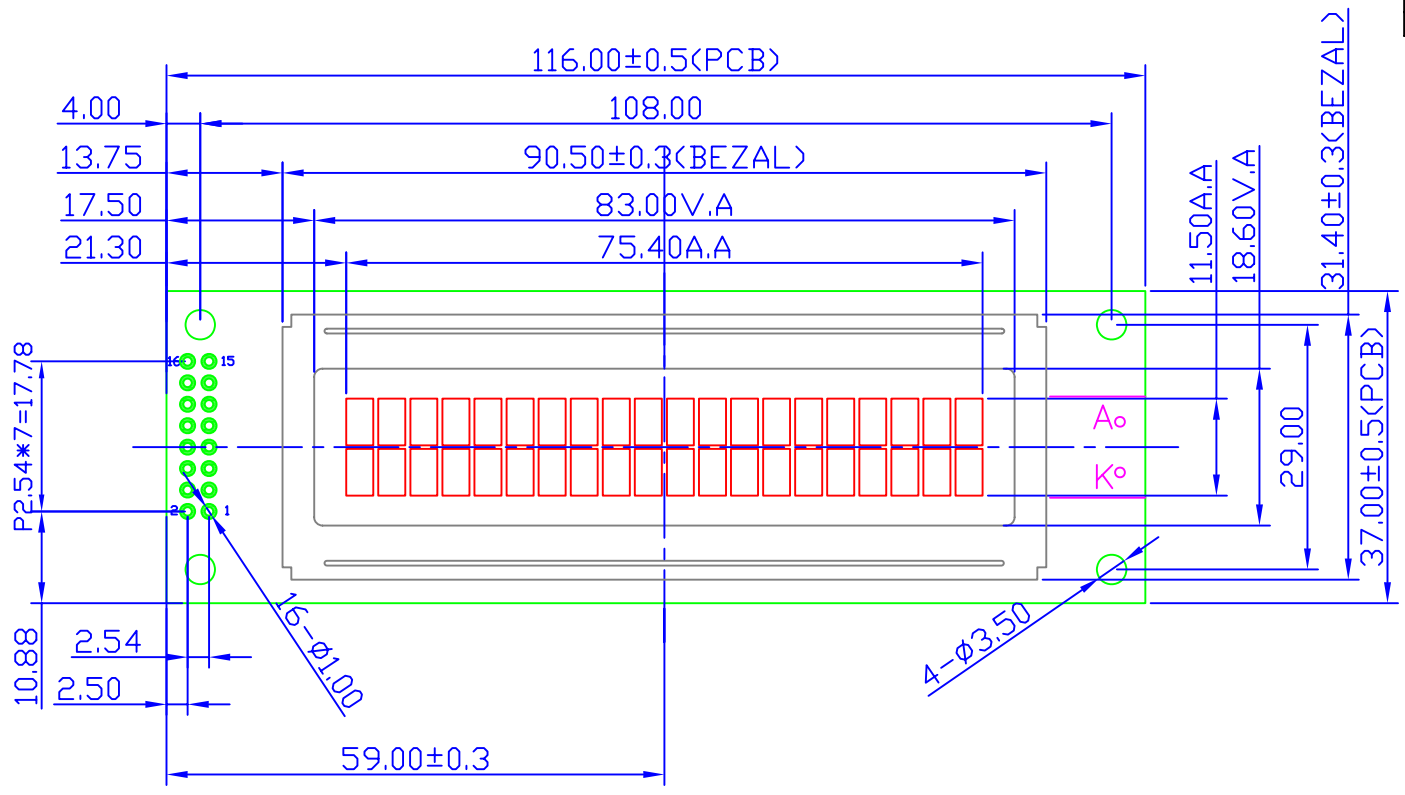

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VDD	V0	RS	R/W	E	D0	D1	D2	D3	D4	D5	D6	D7	BLA	BLK

- NOTE:
- LCD TYPE: STN-BLUE-NEGATIVE
 - POLARIZER MODE: TRANSMISSIVE
 - DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, Vop=4.5V
 - VIEWING DIR.: 6:00
 - OP. TEMP.: -20°C~70°C
 - ST. TEMP.: -30°C~80°C
 - BACKLIGHT: COLOR-WHITE, Vf=5.0V, If=45mA
 - LCD CONTROLLER: ST7066U-0A, VDD=5.0V
 - ROHS COMPLIANT



深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD			
DESIGN		STANDARD	
CHECKED		TECHNOLOGY	
APPROVED		Q.A	

DRAWING No. : HC200201C-bT62L-VC	
DRAWING TITLE: LCM DRAWING	
FILE NO. : 8	
REV. : A	SCALE : -
PROJECTION:	UNIT : mm
	SHEET : 1/1