

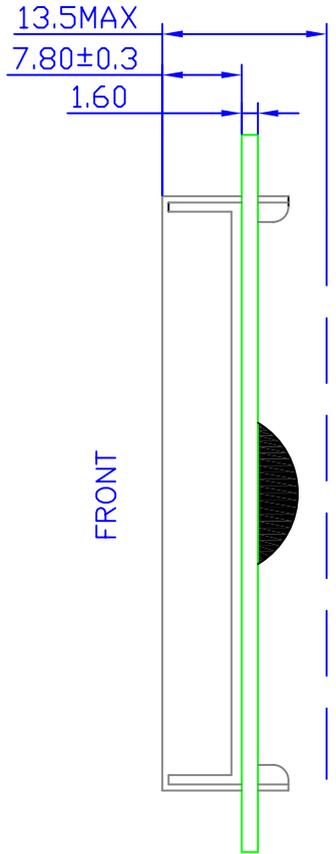


REV.	CHANGE CONTENT	BY	DATE

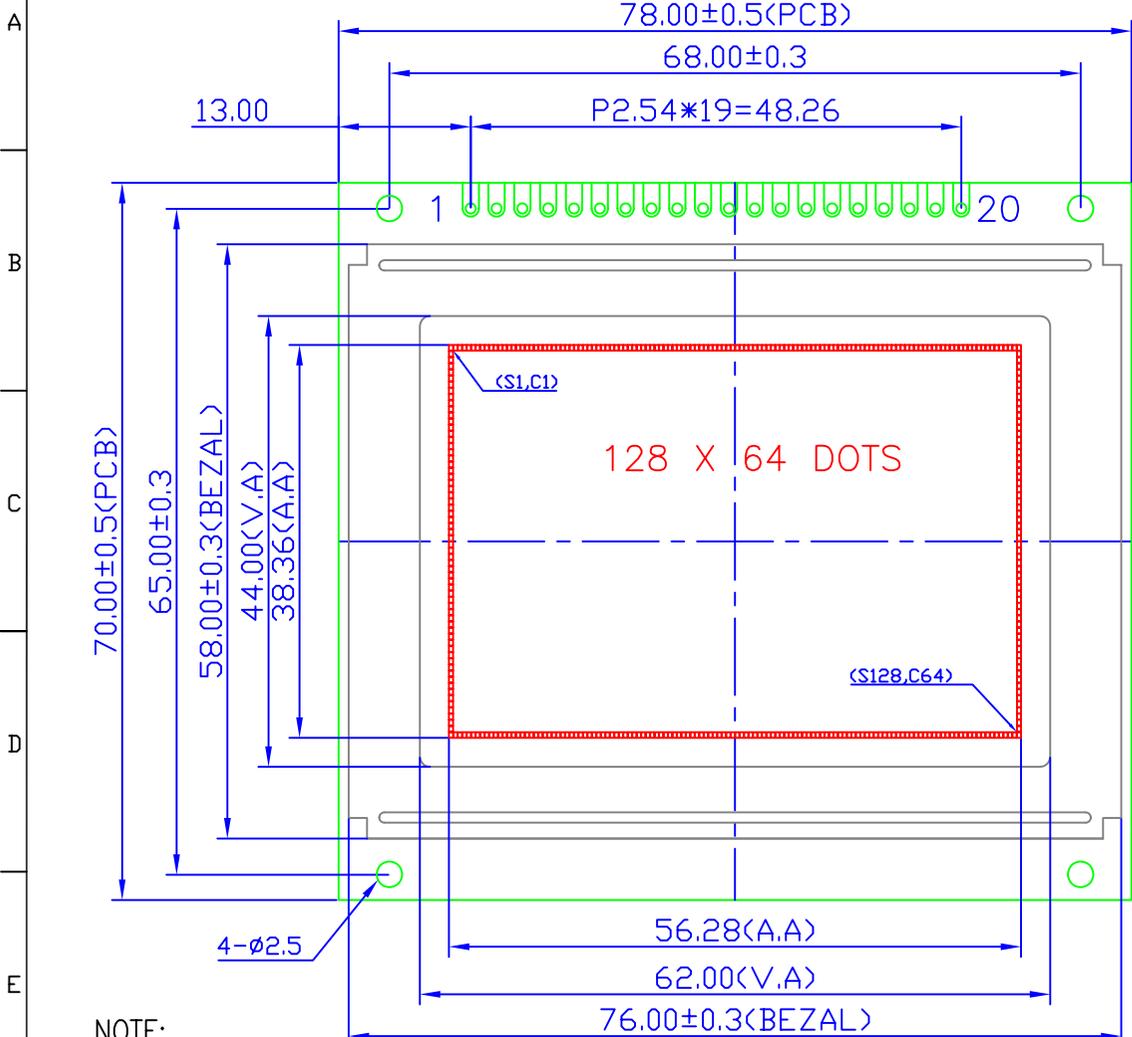

Pins Description

Pin No.	Symbol
1	/CSA
2	/CSB
3	VSS
4	VDD
5	VO
6	RS
7	R/W
8	E
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	/RST
18	VOUT
19	BLA
20	BLK



NOTE:

- LCD TYPE: STN-POSITIVE-Y/G
- POLARIZER MODE: TRANSFLECTIVE
- DRIVE METHOD: 1/64 DUTY, 1/9 BIAS, Vop=13V
- VIEWING DIR.: 6:00
- OP. TEMP.: -30°C~70°C
- ST. TEMP.: -40°C~80°C
- BACKLIGHT: Y/G, Vf=5.0V, If=480mA
- LCD CONTROLLER: SBN0064G, VDD=5.0V



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No.: HYG1286402C-YF63L-VA
DRAWING TITLE: LCM
FILE NO.: 8

DESIGN		STANDARD	
CHECKED		TECHNOLOGY	
APPROVED		Q. A	

REV. : A	SCALE : -
PROJECTION:	UNIT : MM
	SHEET : 1/1