


REV.	CHANGE CONTENT	BY	DATE

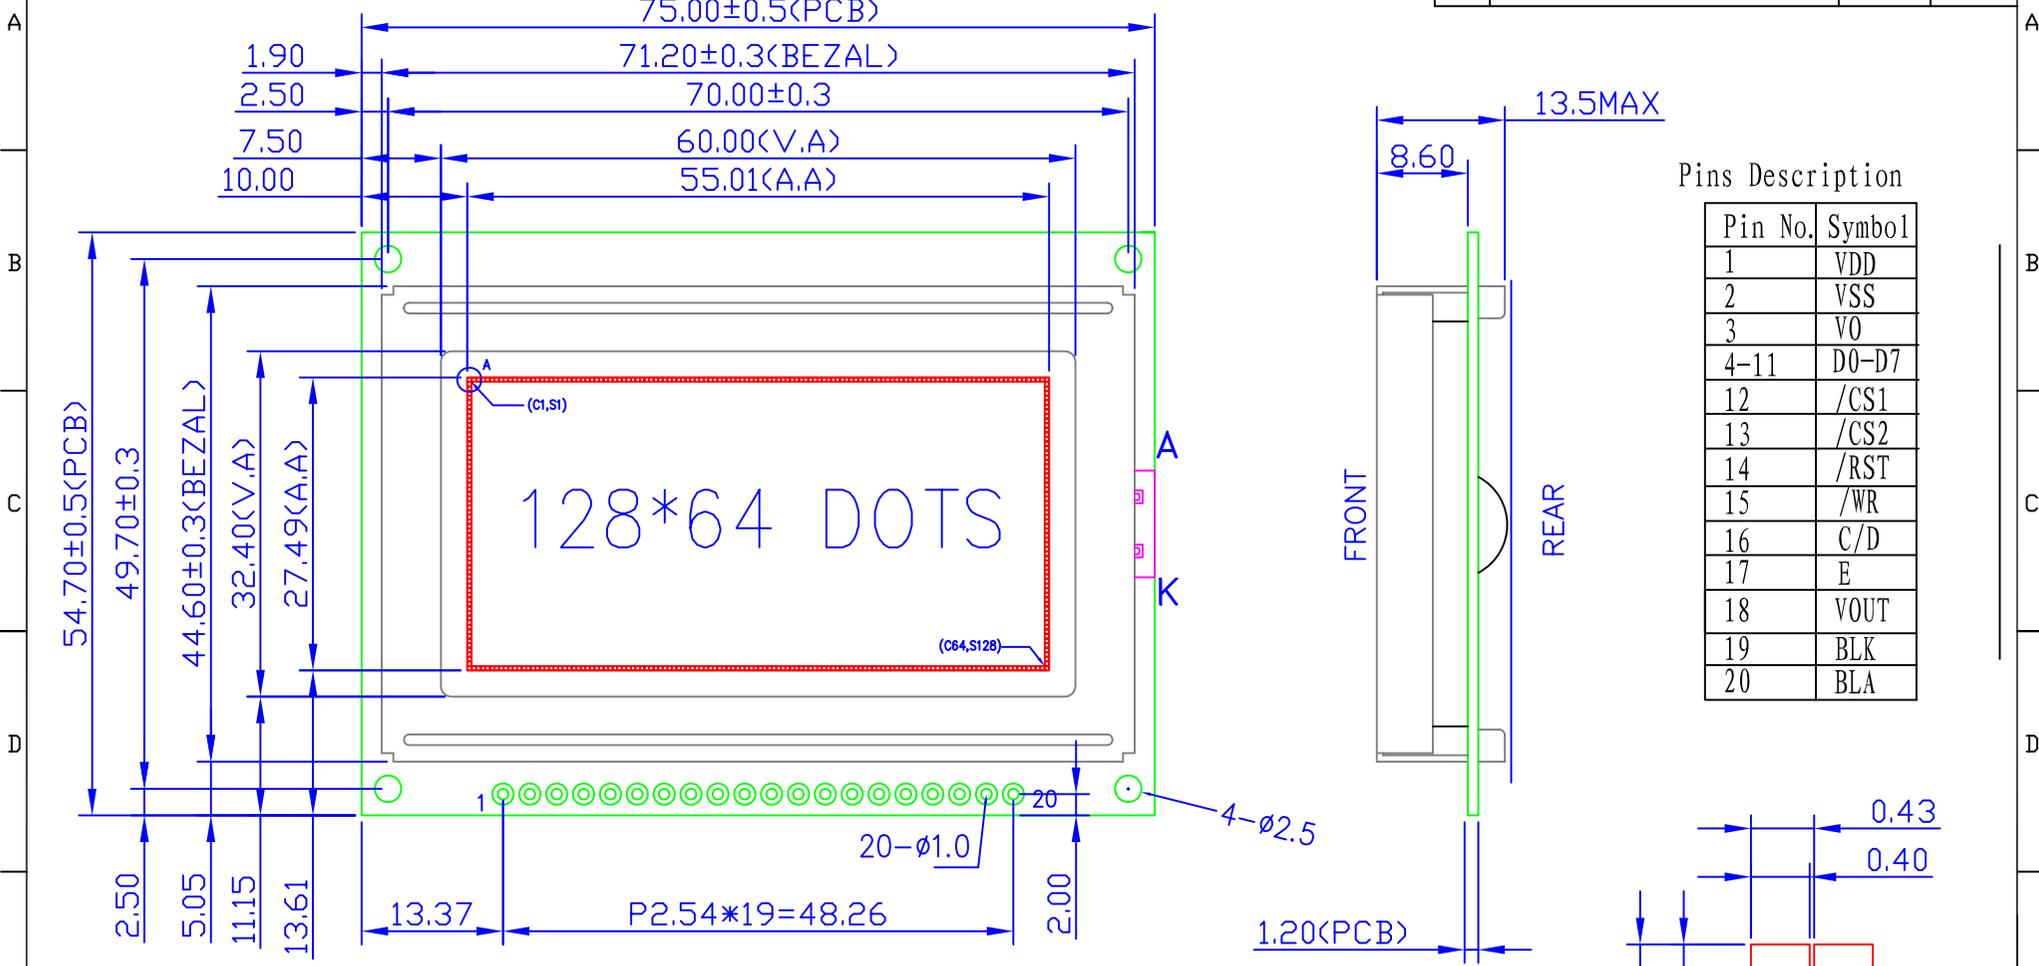

Pins Description

Pin No.	Symbol
1	VDD
2	VSS
3	V0
4-11	D0-D7
12	/CS1
13	/CS2
14	/RST
15	/WR
16	C/D
17	E
18	VOUT
19	BLK
20	BLA

NOTE:

- LCD TYPE: STN-POSITIVE-Y/G
- POLARIZER MODE: TRANSFLECTIVE
- DRIVE METHOD: 1/64 DUTY, 1/9 BIAS, Vop=10.5V
- VIEWING DIR.: 6:00
- OP. TEMP.: -20°C~70°C
- ST. TEMP.: -30°C~80°C
- BACKLIGHT: Y/G, Vf=5.0V, If=120mA
- LCD CONTROLLER: SBN0064G, VDD=5.0V



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No.: HYG1286418C-YF62L-VA
DRAWING TITLE: LCM
FILE NO.: 8

DESIGN		STANDARD	
CHECKED		TECHNOLOGY	
APPROVED		Q. A	

REV.: A	SCALE: -
PROJECTION:	UNIT: MM
	SHEET: 1/1