


REV.	CHANGE CONTENT	BY	DATE

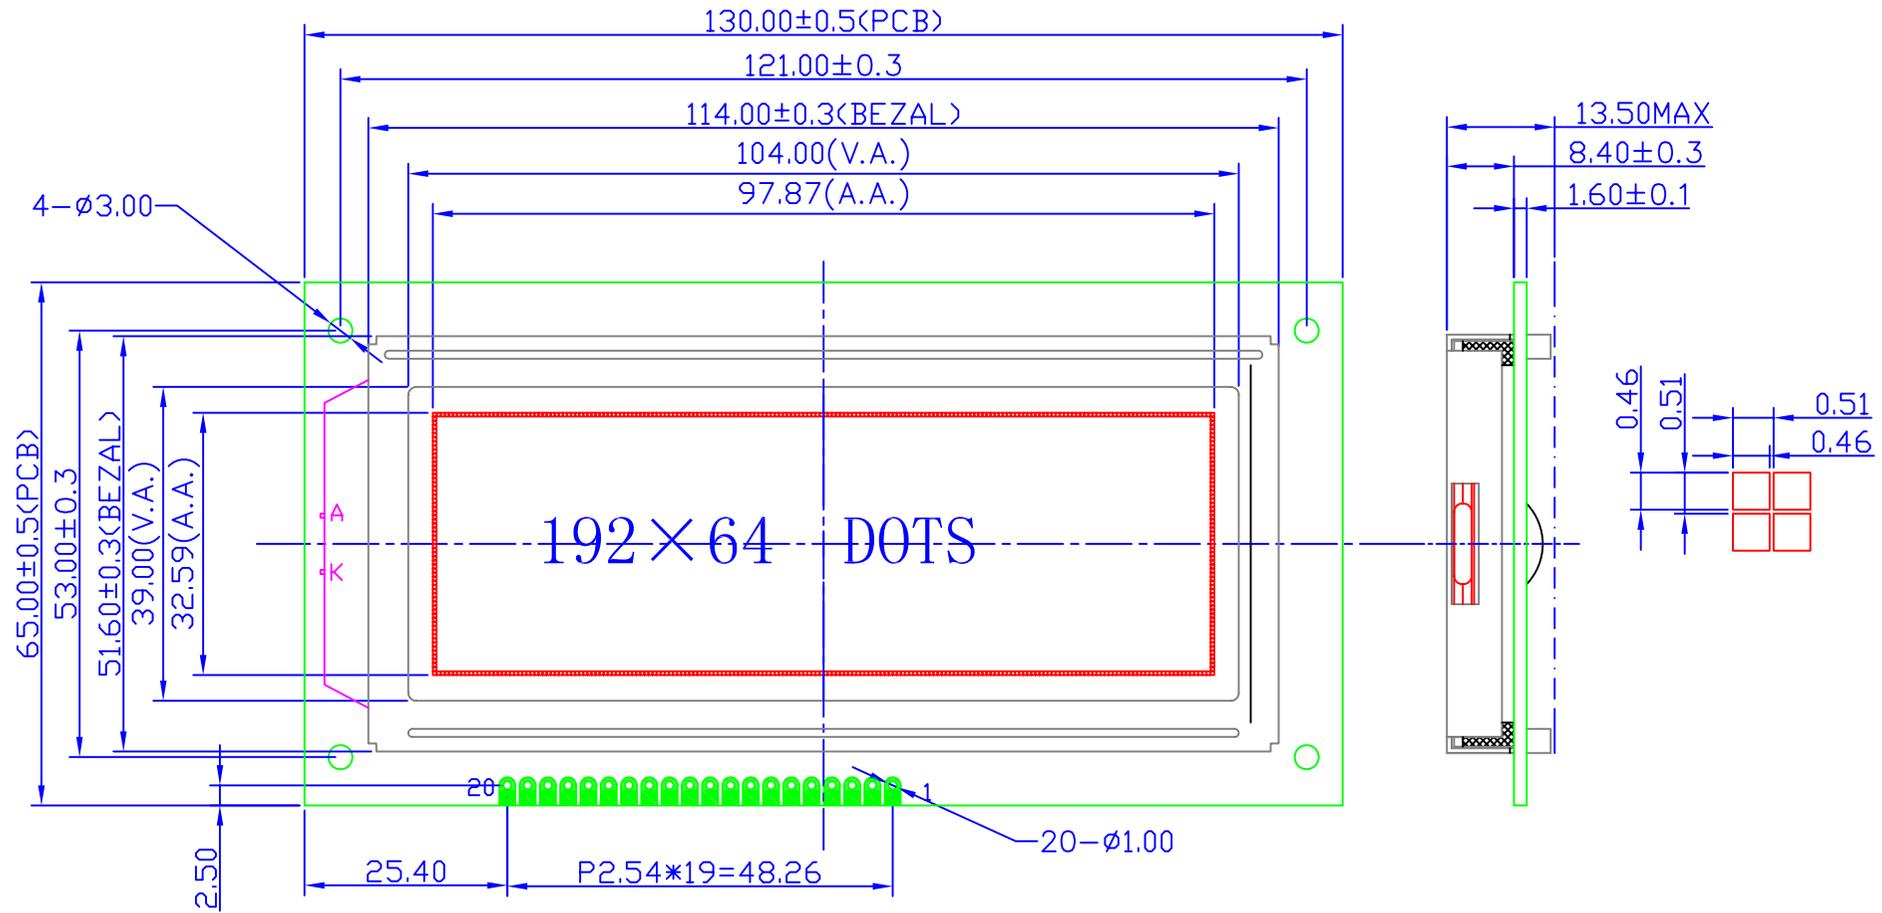

NOTE:

- LCD TYPE: STN-POSITIVE-Y/G
- POLARIZER MODE: TRANSFLECTIVE
- DRIVE METHOD: 1/64 DUTY, 1/9 BIAS, $V_{op}=12.7V$
- VIEWING DIR.: 6:00
- OP. TEMP.: $-20^{\circ}C \sim 70^{\circ}C$
- ST. TEMP.: $-30^{\circ}C \sim 80^{\circ}C$
- BACKLIGHT: WHITE, $V_f=5.0V$, $I_f=45mA$
- LCD CONTROLLER: IC:SBN0064G, $V_{DD}=5.0V$

Pin No.	1	2	3	4	5	6	7-14	15	16	17	18	19	20
Symbol	Vss	Vdd	V0	RS	R/W	E	DB0-DB7	CS1	/RST	CS2	CS3	V _{OUT}	LED+



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No.: HYG1926401C-YF62L-VC
DRAWING TITLE: LCM
FILE NO.: 8

DESIGN		STANDARD		REV. : A	SCALE : -
CHECKED		TECHNOLOGY		PROJECTION:	UNIT : MM
APPROVED		Q. A		⊙	SHEET : 1/1