


REV.	CHANGE CONTENT	BY	DATE

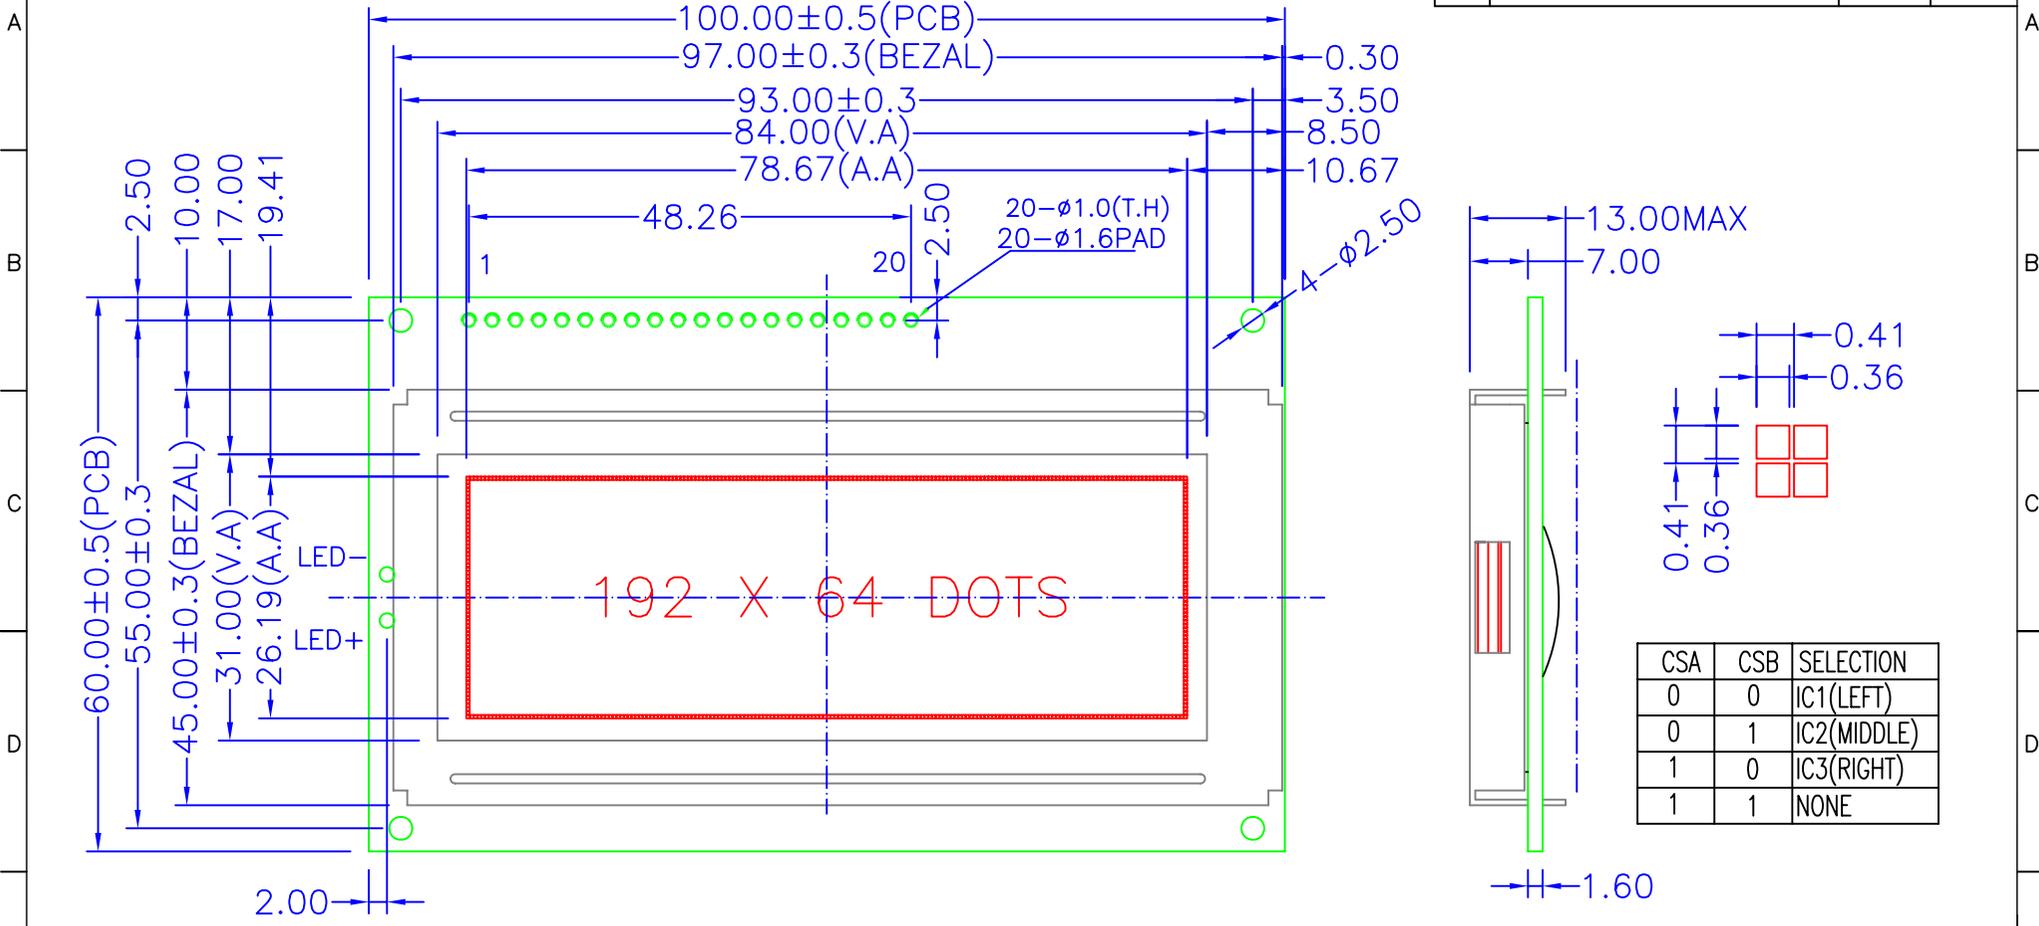

CSA	CSB	SELECTION
0	0	IC1 (LEFT)
0	1	IC2 (MIDDLE)
1	0	IC3 (RIGHT)
1	1	NONE

- NOTE:
- LCD TYPE: STN-POSITIVE-Y/G
  - POLARIZER MODE: TRANSFLECTIVE
  - DRIVE METHOD: 1/64 DUTY, 1/9 BIAS,  $V_{op}=12.0V$
  - VIEWING DIR.: 6:00
  - OP. TEMP.:  $-20^{\circ}C \sim 70^{\circ}C$
  - ST. TEMP.:  $-30^{\circ}C \sim 80^{\circ}C$
  - BACKLIGHT: Y/G,  $V_f=5.0V$ ,  $I_f=210mA$
  - LCD CONTROLLER: S6B0107, S6B0108\*3,  $V_{DD}=5.0V$

Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
SYMBOL	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	E	R/W	RS	VO	VDD	VSS	CSB	CSA	VOU	RST	BLA	BLK



深圳市华远显示器件有限公司  
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No.: HYG1926404C-YF62L-VB  
DRAWING TITLE: LCM  
FILE NO.: 8

DESIGN		STANDARD		REV. : A	SCALE : -
CHECKED		TECHNOLOGY		PROJECTION:	UNIT : MM
APPROVED		Q. A			SHEET : 1/1