

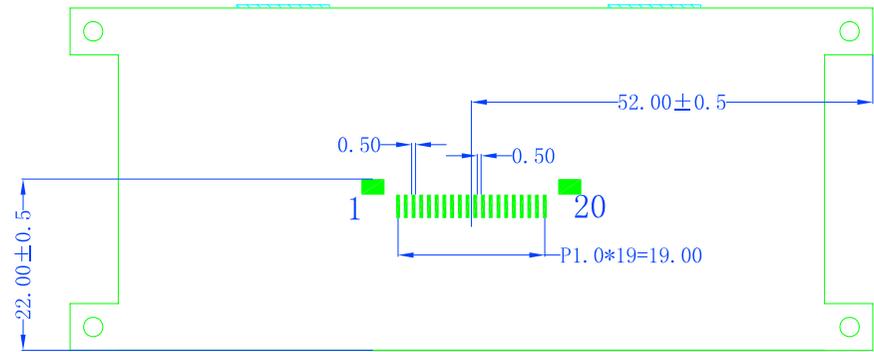
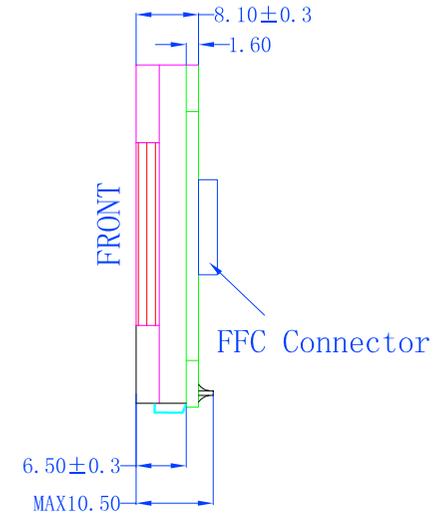


REV.	CHANGE CONTENT	BY	DATE

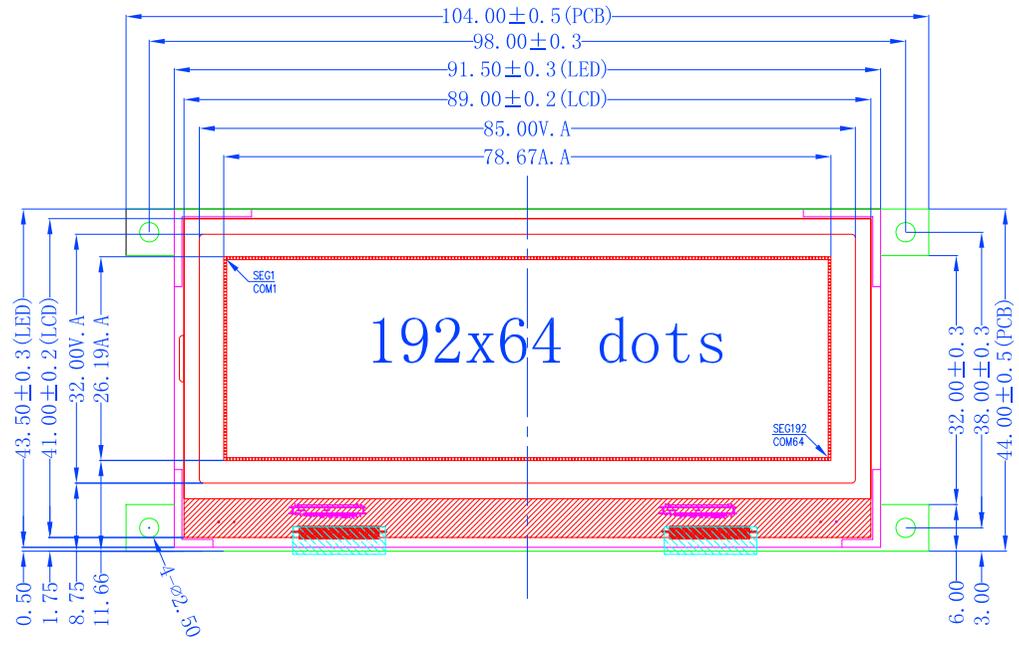

PIN	SYMBOL
1	DB0
2	DB1
3	DB2
4	DB3
5	DB4
6	DB5
7	DB6 (SCL)
8	DB7 (SI)
9	/RD (E)
10	/WR (R/W)
11	RS
12	NC
13	VDD
14	VSS
15	/CSB
16	/CSA
17	NC
18	/RST
19	BLA
20	BLK

NOTE:

- LCD TYPE: STN-POSITIVE-Y/G
- POLARIZER MODE: TRANFLECTIVE
- DRIVE METHOD: 1/64 DUTY, 1/9 BIAS,  $V_{op}=9.0V$
- VIEWING DIR.: 12:00
- OP. TEMP.:  $-20^{\circ}C \sim 70^{\circ}C$
- ST. TEMP.:  $-30^{\circ}C \sim 80^{\circ}C$
- BACKLIGHT: Y/G,  $V_f=5.0V$ ,  $I_f=135mA$
- LCD CONTROLLER: ST7565P,  $VDD=3.3V$



深圳市华远显示器件有限公司  
SHENZHEN HUAYUAN DISPLAY CO., LTD

DESIGN		STANDARD	
CHECKED		TECHNOLOGY	
APPROVED		Q.A	

DRAWING No. : HYG1926417G-YFC2L-VC  
DRAWING TITLE: LCM  
FILE NO.: 7

REV. : A	SCALE : -
PROJECTION:	UNIT : mm
	SHEET : 1/1