


REV.	CHANGE CONTENT	BY	DATE

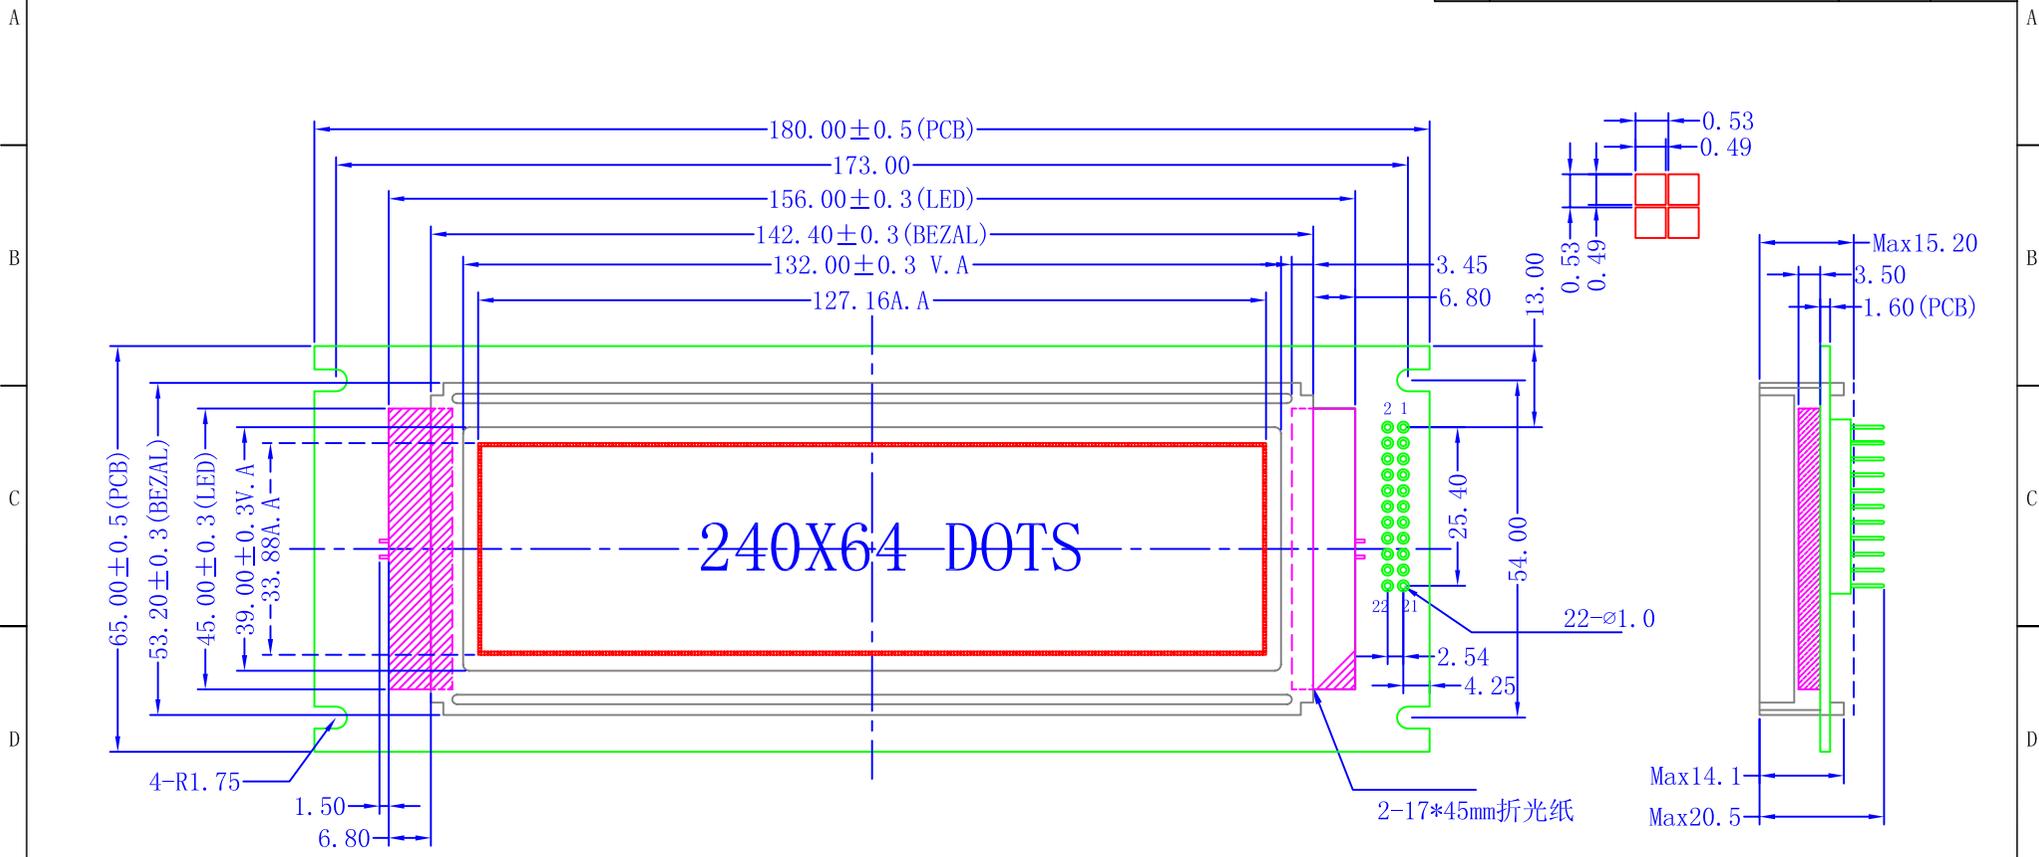

NOTE:

- LCD TYPE: STN,BLUE,NEGATIVE
- POLARIZER MODE: TRANSMISSIVE
- DRIVE METHOD: 1/64 DUTY, 1/9 BIAS, Vop=12.0V
- VIEWING DIR.: 6:00
- OP. TEMP.: -20°C~70°C
- ST. TEMP.: -30°C~80°C
- BACKLIGHT: WHITE, Vf=5.0V, If=200mA,
- LCD CONTROLLER: T6963C, VDD=5.0V

PIN No	1	2	3	4	5	6	7	8	9	10	11~18	19	20	21	22
Symbol	FG	VSS	VDD	VO	/WR	/RD	CE	C/D	NC	/RST	DB0~DB7	FS	VOUT	BLA	BLK



深圳市华远显示器件有限公司  
SHENZHEN HUAYUAN DISPLAY CO., LTD

DESIGN		STANDARD	
CHECKED		TECHNOLOGY	
APPROVED		Q. A	

DRAWING No. :HYG2406402C-bT62L-VB	
DRAWING TITLE: LCM	
FILE NO. : 8	
REV. : A	SCALE : -
PROJECTION:	UNIT : MM
	SHEET : 1/1