


REV.	CHANGE CONTENT	BY	DATE

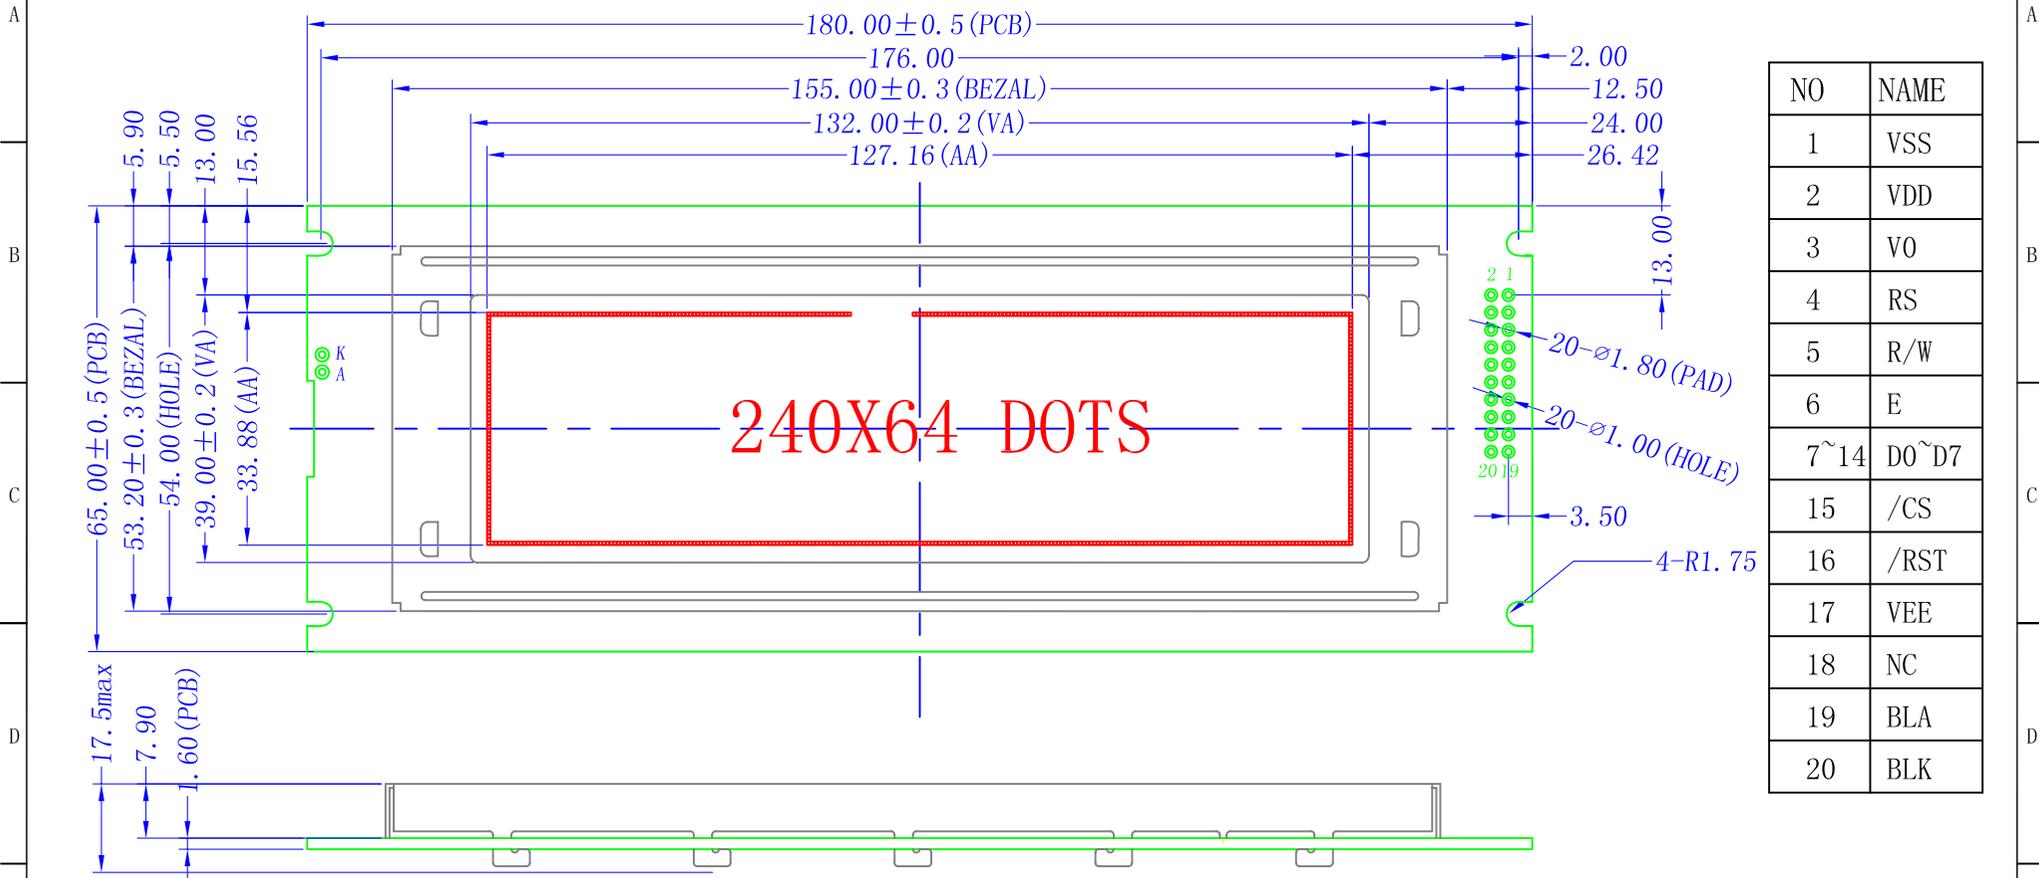

NO	NAME
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7~14	DO~D7
15	/CS
16	/RST
17	VEE
18	NC
19	BLA
20	BLK

NOTE:

- LCD TYPE: STN-BLUE-NEGATIVE
- POLARIZER MODE: TRANSMISSIVE
- DRIVE METHOD: 1/64 DUTY, 1/9 BIAS, Vop=12V
- VIEWING DIR.: 6:00
- OP. TEMP.: -20°C~70°C
- ST. TEMP.: -30°C~80°C
- BACKLIGHT: WHITE, Vf=5.0V, If=100mA
- LCD CONTROLLER: LC7981, VDD=5.0V



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No.: HYG2406408C-bT62L-VA
DRAWING TITLE: LCM
FILE NO.: 8

DESIGN		STANDARD	
CHECKED		TECHNOLOGY	
APPROVED		Q. A	

REV. : A	SCALE : -
PROJECTION:	UNIT : MM
	SHEET : 1/1