


REV.	CHANGE CONTENT	BY	DATE

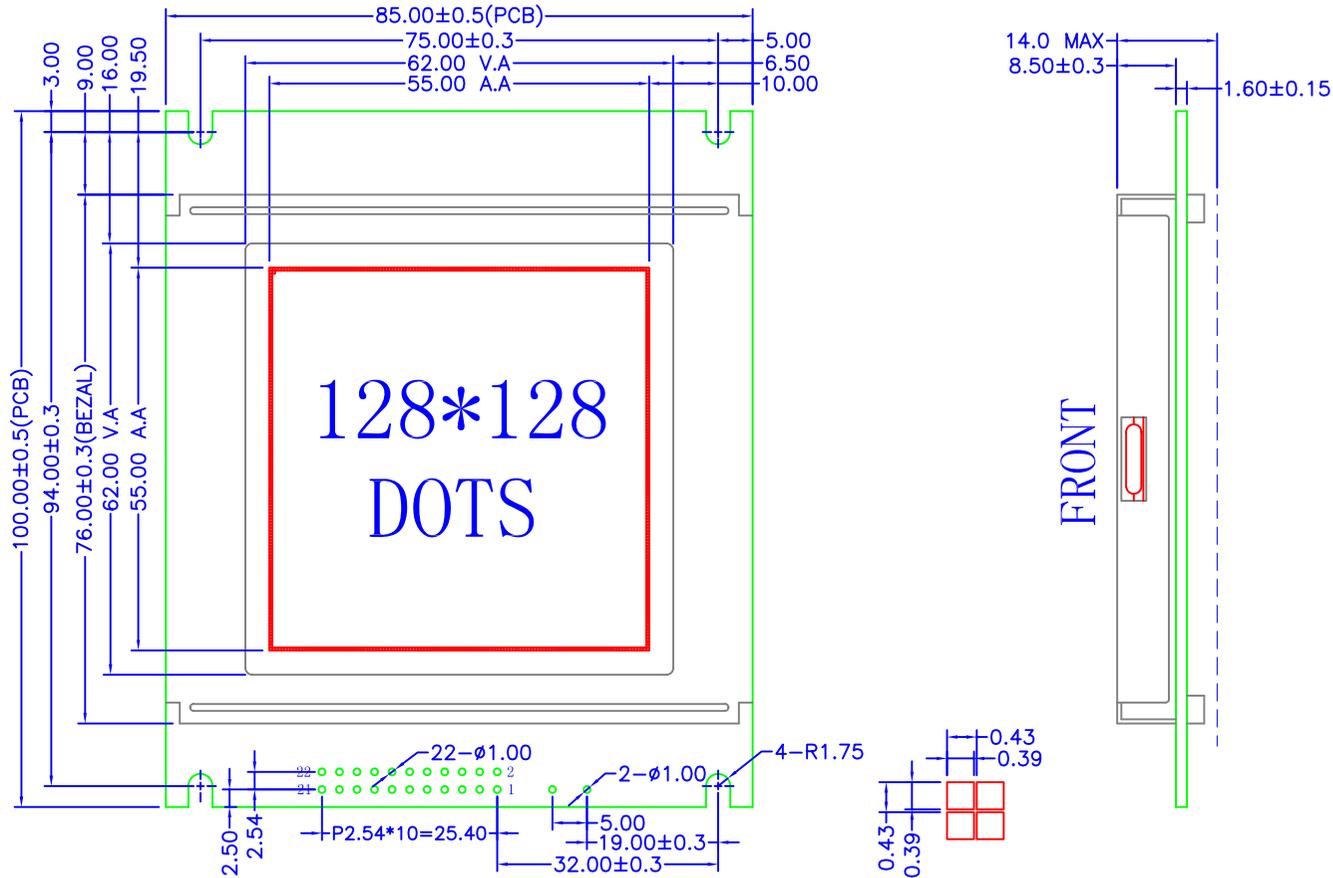

PIN	SYMBOL
1	VSS
2	VDD
3	VO
4	D/I
5	R/W
6	E
7	/RST
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6
15	DB7
16	CS1
17	CS2
18	CS3
19	CS4
20	VEE
21	BLA
22	BLK

NOTE:

- LCD TYPE: STN-NEGATIVE BLUE
- POLARIZER MODE: TRANSMISSIVE
- DRIVE METHOD: 1/64 DUTY, 1/9 BIAS, Vop=5.0V
- VIEWING DIR.: 6:00
- OP. TEMP.: -20°C~70°C
- ST. TEMP.: -30°C~80°C
- BACKLIGHT: WHITE, Vf=5.0V, If=60mA
- LCD CONTROLLER: SBN0064G VDD=5.0V



深圳市华远显示器件有限公司  
SHENZHEN HUAYUAN DISPLAY CO., LTD

DESIGN		STANDARD	
CHECKED		TECHNOLOGY	
APPROVED		Q. A	

DRAWING No. :HYG12812801C-bT62L-VBR	
DRAWING TITLE: LCM	
FILE NO. : 8	
REV. : A	SCALE : -
PROJECTION:	UNIT : MM
	SHEET : 1/1