


REV.	CHANGE CONTENT	BY	DATE

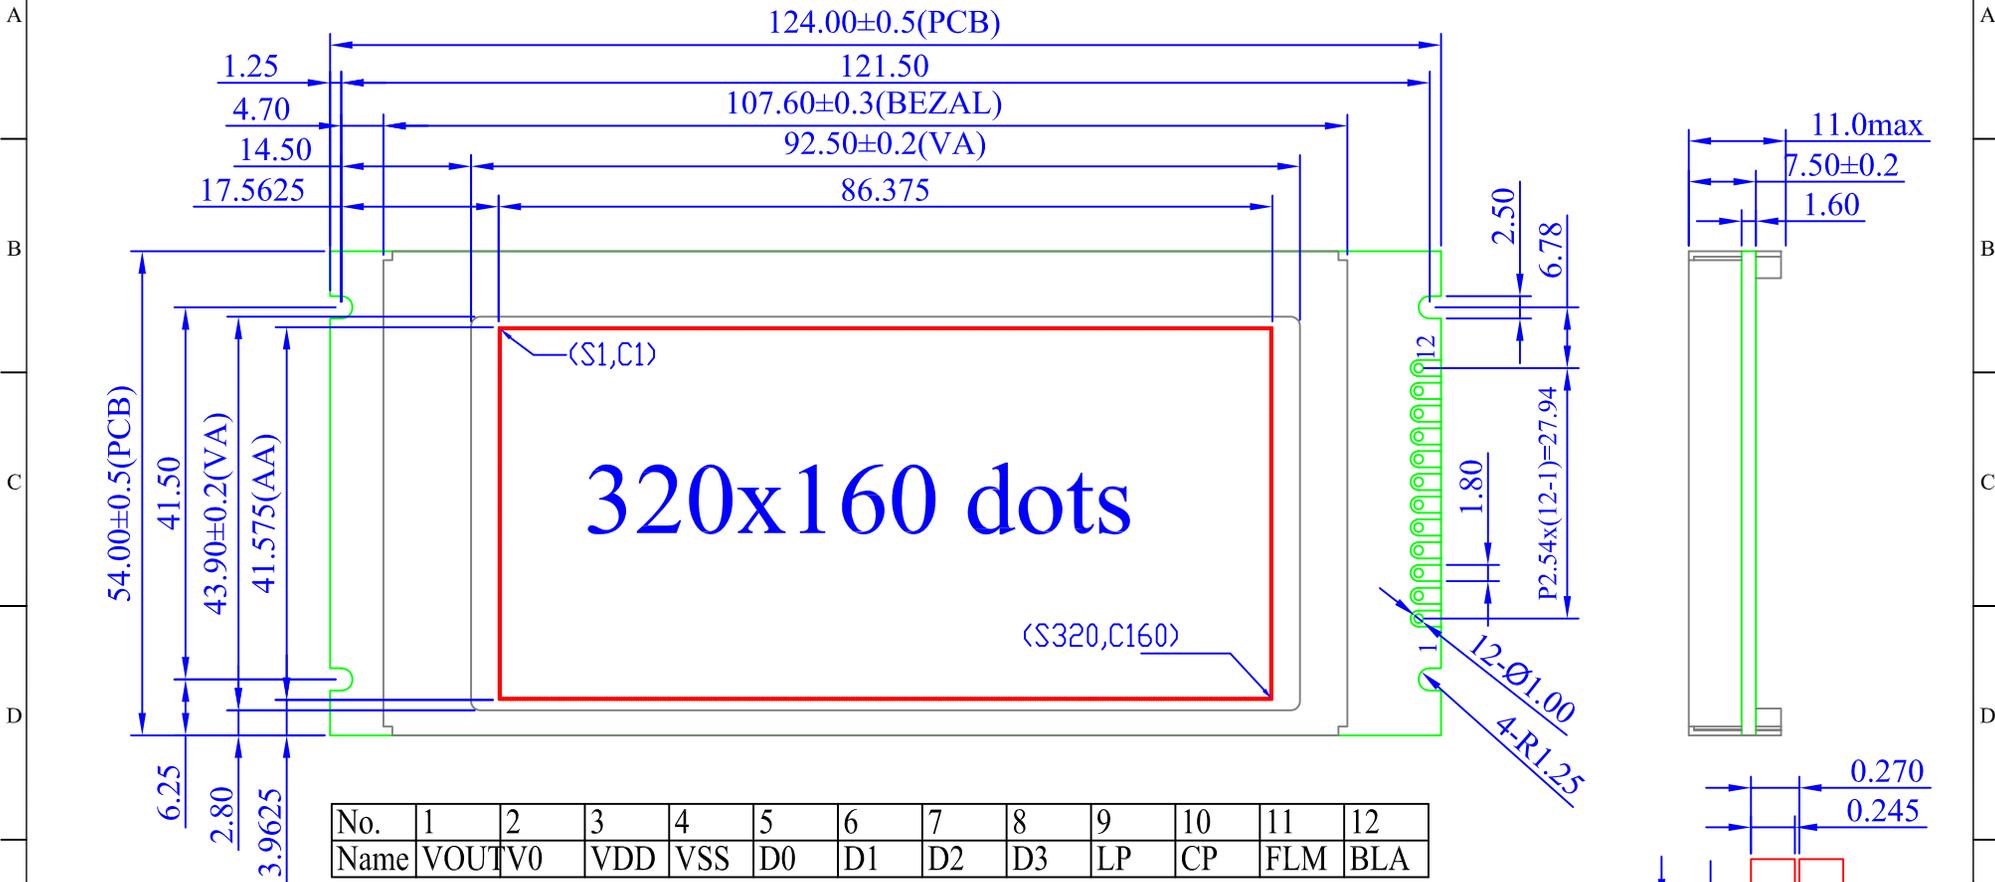

NOTE:

- LCD TYPE: FSTN-POSITIVE
- POLARIZER MODE: TRANFLECTIVE
- DRIVE METHOD: 1/160 DUTY, 1/13 BIAS, Vop=16.0V
- VIEWING DIR.: 12:00
- OP. TEMP.: -20°C~70°C
- ST. TEMP.: -30°C~80°C
- BACKLIGHT: WHITE, Vf=5.0V, If=60mA
- LCD DRIVER: ST8016S, VDD=5.0V

LCD Pin	ST80106S Pad
C1--C160	U1(Y160--Y1)
S1--S160	U2(Y160--Y1)
S161--S320	U3(Y160--Y1)



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DESIGN		STANDARD	
CHECKED		TECHNOLOGY	
APPROVED		Q. A	

DRAWING No. :HYG32016001G-FFC2L-VA
DRAWING TITLE: LCM
FILE NO. : 8

REV. : A	SCALE : -
PROJECTION:	UNIT : MM
⊕	SHEET : 1/1