


REV.	CHANGE CONTENT	BY	DATE



PIN No	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Symbol	VSS	VDD	V0	A0	R/W	E1	E2	NC	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLA	BLK

- NOTE:
- LCD TYPE: STN-POSITIVE-Y/G
 - POLARIZER MODE: TRANSFLECTIVE
 - DRIVE METHOD: 1/32 DUTY, 1/7 BIAS, Vop=7.5V
 - VIEWING DIR.: 6:00
 - OP. TEMP.: -20°C~70°C
 - ST. TEMP.: -30°C~80°C
 - BACKLIGHT: COLOR-Y/G, Vf=4.2V, If=180mA
 - LCD CONTROLLER: PT6520, VDD=5.0V
 - ANTI-UV FILTER

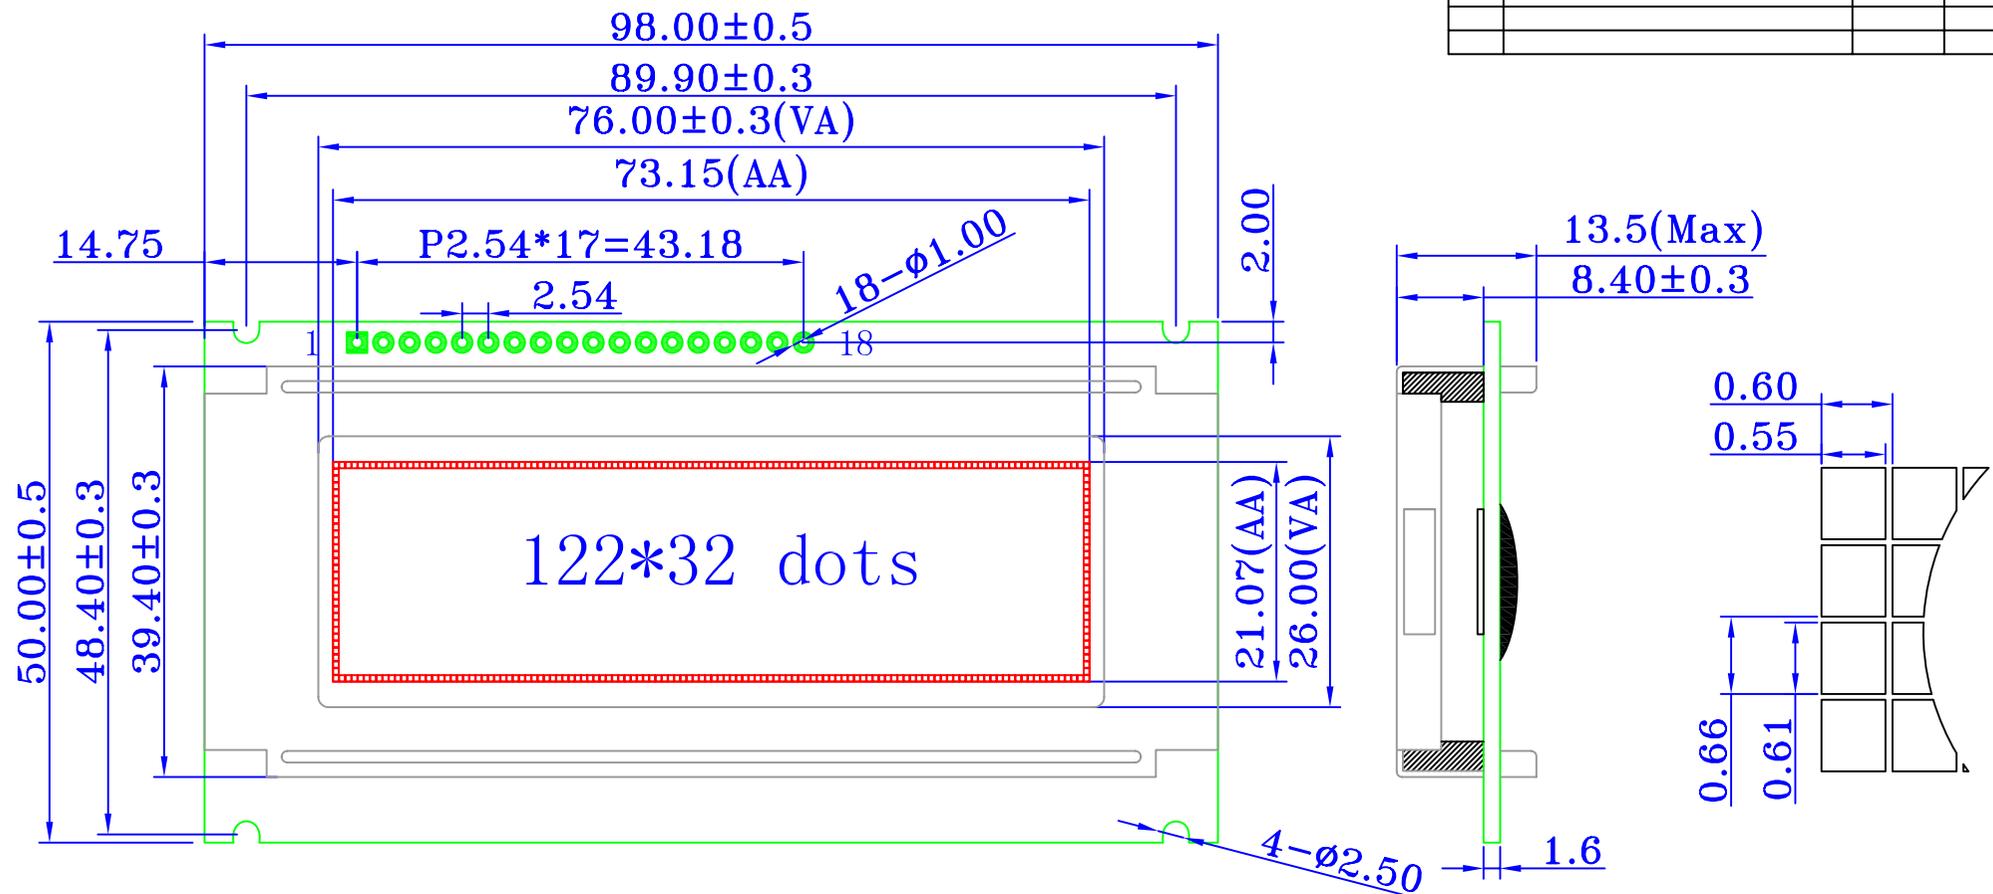

深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No.: HYG1223201C-YF62L-VB
DRAWING TITLE: LCM
FILE NO.: 8

DESIGN	STANDARD	REV.:	SCALE: -
CHECKED	TECHNOLOGY	PROJECTION:	UNIT: mm
APPROVED	Q.A	⊕	SHEET: 1/1