
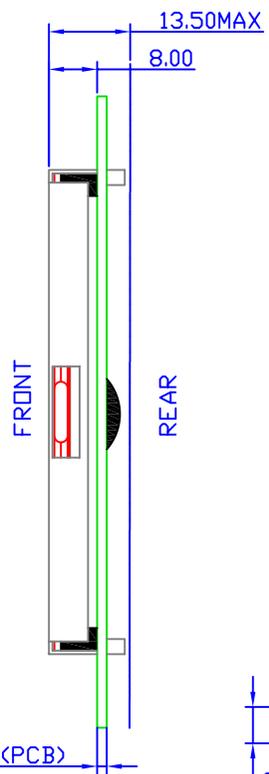


REV.	CHANGE CONTENT	BY	DATE

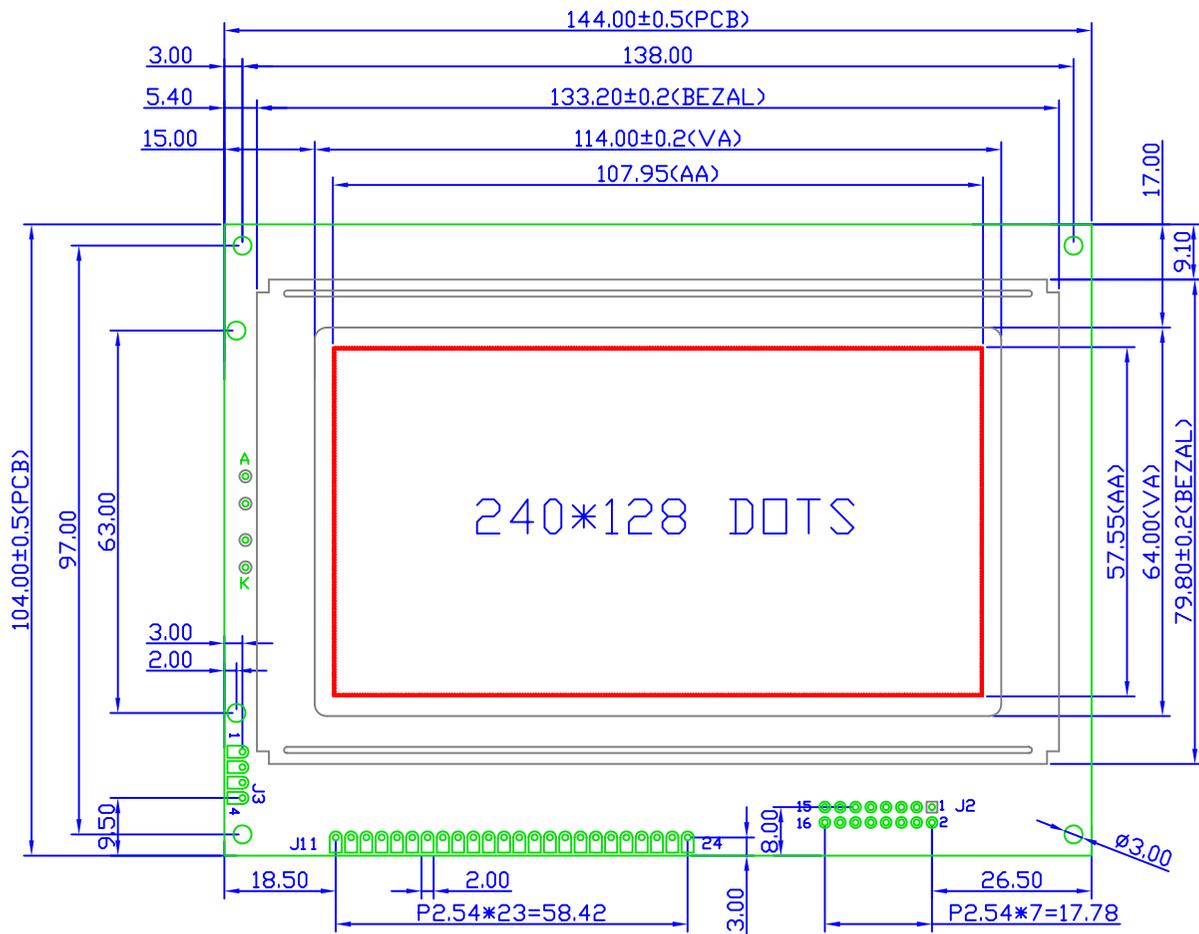


J2 ASSIGNMENT

PIN NO.	NAME
1	KC0
2	KC1
3	KC2
4	KC3
5	KC4
6	KC5
7	KC6
8	KC7
9	KR0
10	KR1
11	KR2
12	KR3
13	KR4
14	KR5
15	KR6
16	KR7

J3 ASSIGNMENT

PIN NO.	NAME
1	X1
2	Y1
3	X2
4	Y2



J1 ASSIGNMENT

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12
NAME	/AVSS	AVDD	VSS	VDD	V0	A0	/WR	/RD	/CS1	CS2	BUSY	INT

PIN NO.	13	14	15	16	17	18	19	20	21	22	23	24
NAME	/RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VOUT	BLA	BLK

NOTE:

- LCD TYPE: STN-BLUE-NEGATIVE
- POLARIZER MODE: TRANSMISSIVE
- DRIVE METHOD: 1/128 DUTY, 1/12 BIAS, Vop=18V
- VIEWING DIR.: 6:00
- OP. TEMP.: -20°C~70°C
- ST. TEMP.: -30°C~80°C
- BACKLIGHT: WHITE, Vf=5.0V, If=120mA
- LCD CONTROLLER: RA8822P1N-S, VDD=5.0V



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No. : HYG24012829S-bT62L-VA
DRAWING TITLE: LCM
FILE NO. : 8

DESIGN		STANDARD	
CHECKED		TECHNOLOGY	
APPROVED		Q. A	

REV. : A	SCALE : -
PROJECTION:	UNIT : MM
	SHEET : 1/1