


REV.	CHANGE CONTENT	BY	DATE



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
FG	VSS	VDD	NC	R/W	E1	E2	RS	NC	/RST	D0	D1	D2	D3	D4	D5	D6	D7	BLA	BLK

- NOTE:
- LCD TYPE: STN-POSITIVE-Y/G
 - POLARIZER MODE: TRANSFLECTIVE
 - DRIVE METHOD: 1/32 DUTY, 1/6 BIAS, $V_{op}=7.0V$
 - VIEWING DIR.: 6:00
 - OP. TEMP.: $-25^{\circ}C \sim 75^{\circ}C$
 - ST. TEMP.: $-35^{\circ}C \sim 85^{\circ}C$
 - BACKLIGHT: Y/G, $V_f=5.0V$, $I_f=330mA$
 - LCD CONTROLLER: ST7920-0B, $VDD=5.0V$

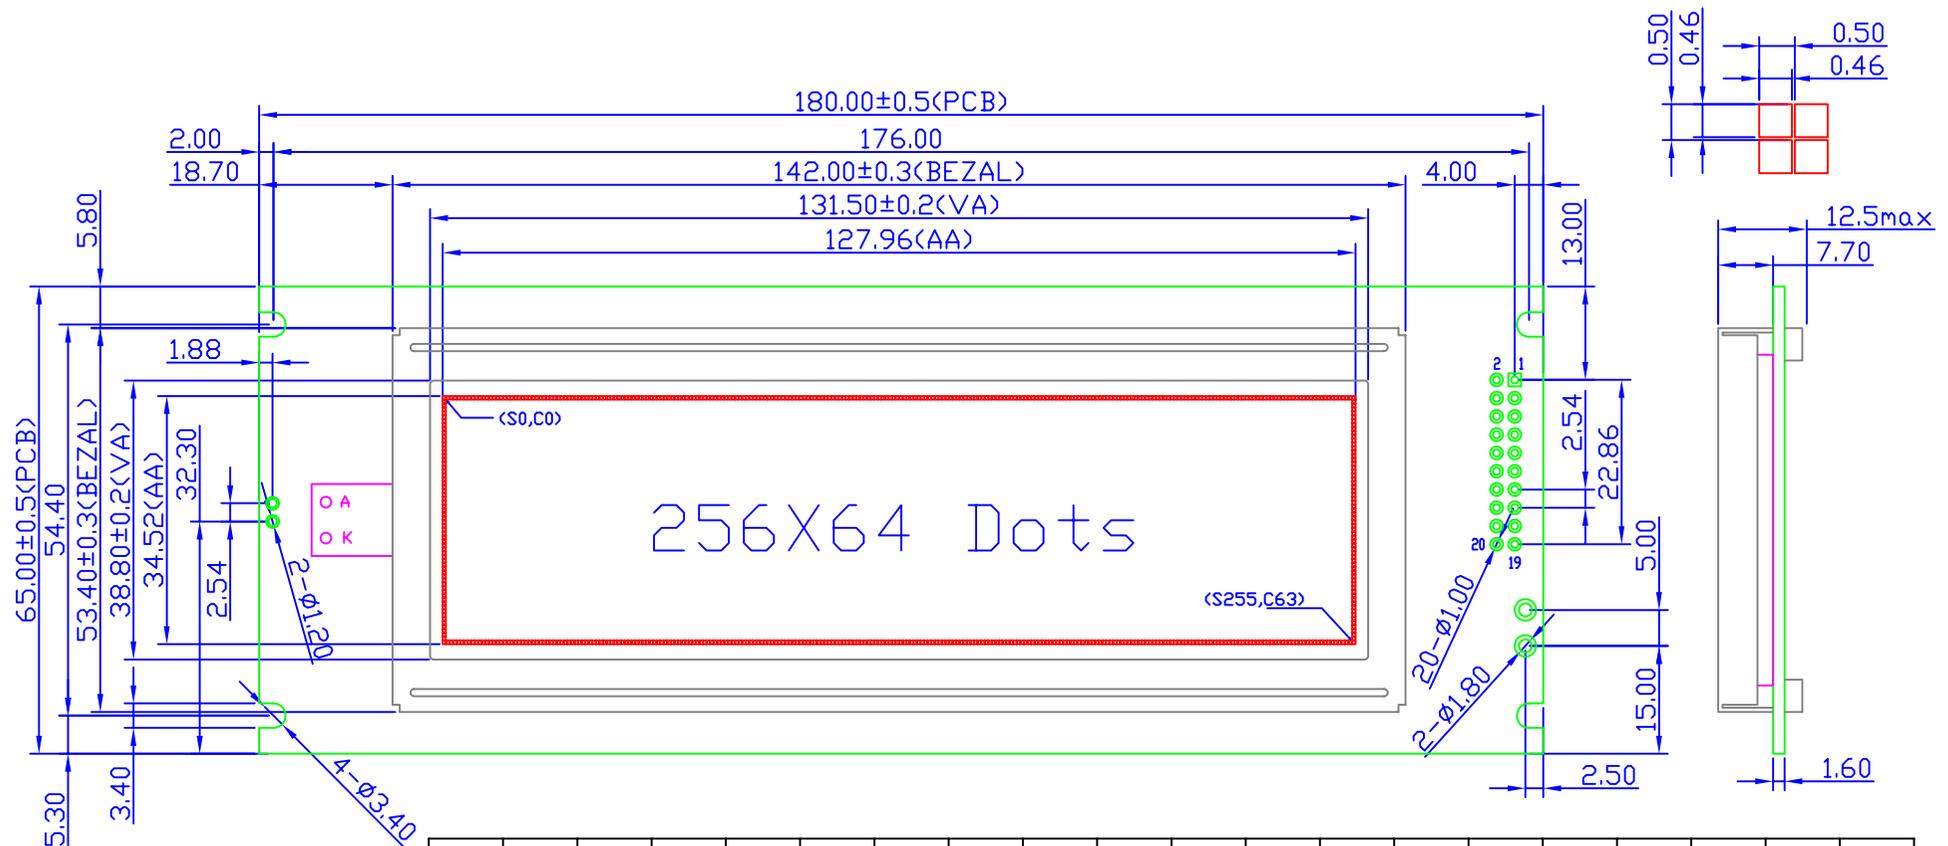

深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No. : HYG2566401C-YF62L-VA	
DRAWING TITLE: LCM	
FILE NO. : 8	
DESIGN	STANDARD
CHECKED	TECHNOLOGY
APPROVED	Q.A
REV. : A	SCALE : -
PROJECTION:	UNIT : mm
	SHEET : 1/1