


REV.	CHANGE CONTENT	BY	DATE
B	玻璃由JY01028D改为JY01028F	LZM	05.12.10

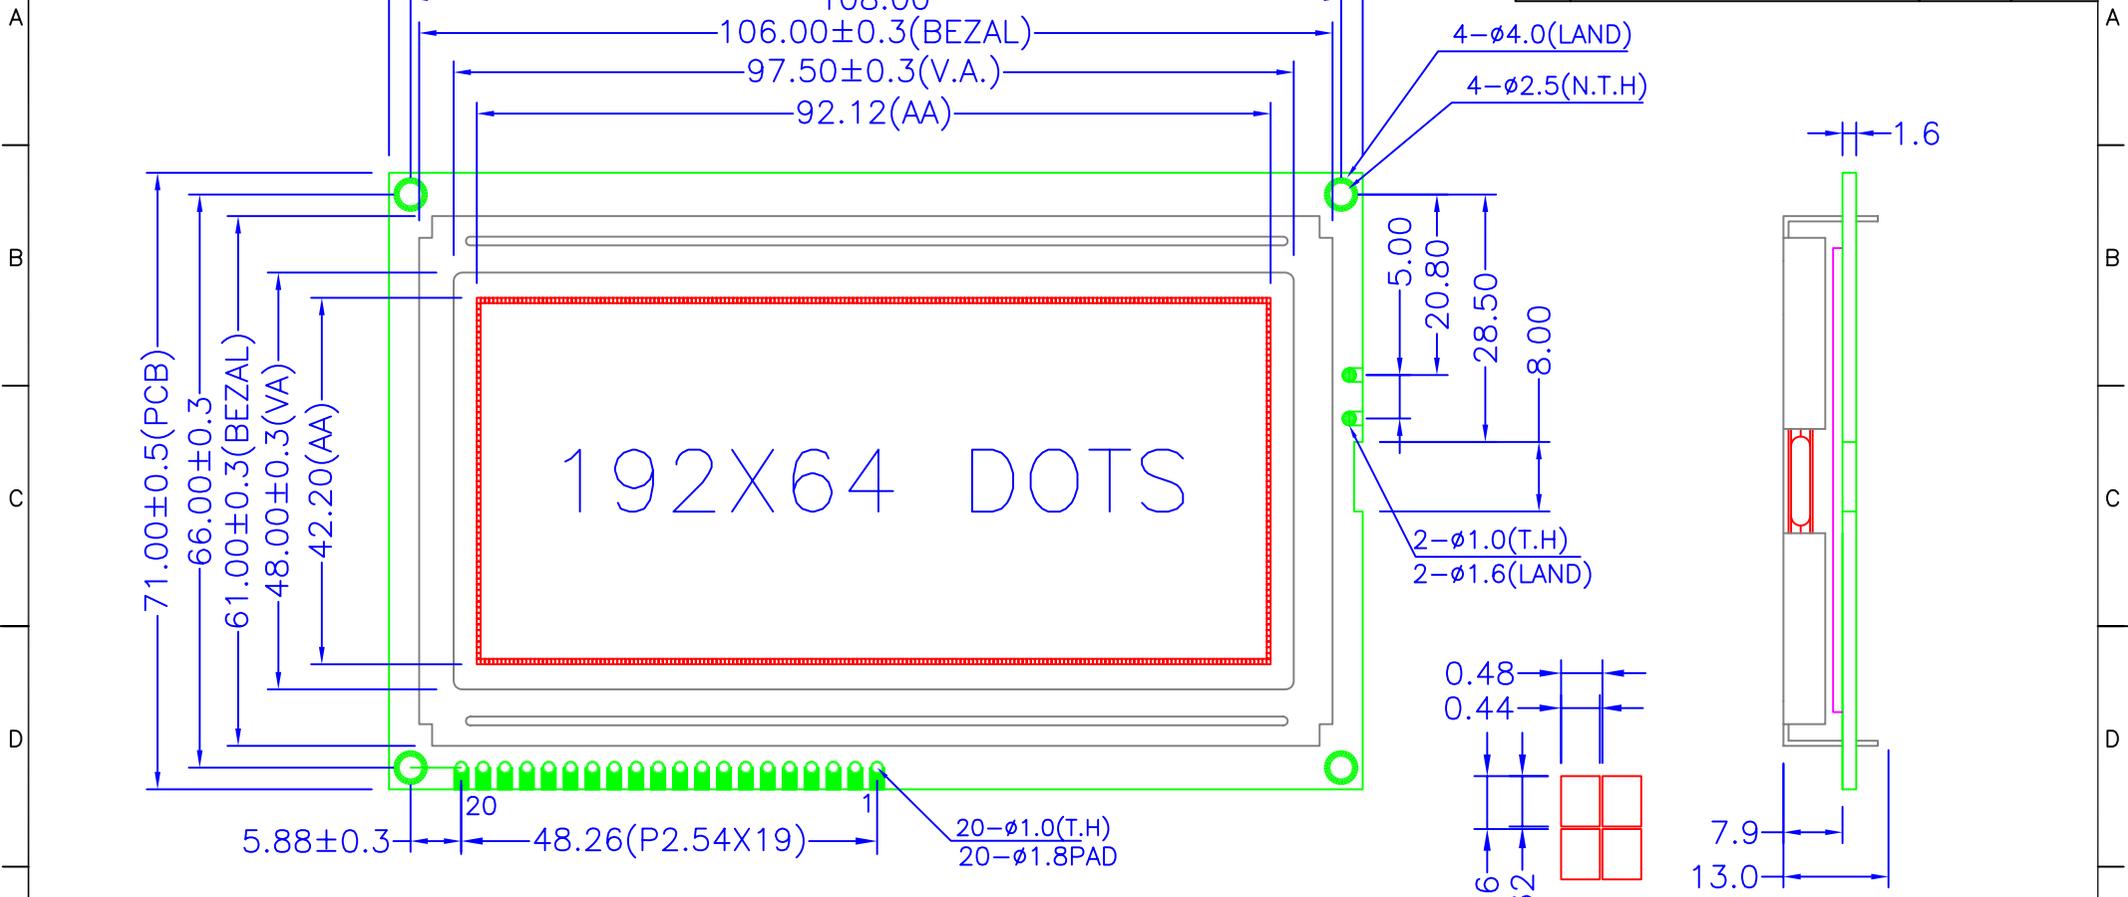

NOTE:

- LCD TYPE: STN-POSITIVE-Y/G
- POLARIZER MODE: TRANSFLECTIVE
- DRIVE METHOD: 1/64 DUTY, 1/9 BIAS, Vop=12.5V
- VIEWING DIR.: 6:00
- OP. TEMP.: -20°C~70°C
- ST. TEMP.: -30°C~80°C
- BACKLIGHT: WHITE, Vf=5.0V, If=80mA
- LCD CONTROLLER: S6B0108 ,VDD=5.0V

1	2	3	4	5	6	7~14	15	16	17	18	19	20
VSS	VDD	V0	RS	R/W	E	DO~D7	CS1	CS2	CS3	/RST	VOUT	BLA

 <p>华远显示 H-Y DISPLAY</p>	深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD						DRAWING No.: HYG1926414C-YF62L-VA DRAWING TITLE: LCM FILE NO.: 8	
	DESIGN			STANDARD			REV. :	SCALE : -
	CHECKED			TECHNOLOGY			PROJECTION:	UNIT : MM
	APPROVED			Q.A				SHEET : 1/1