


REV.	CHANGE CONTENT	BY	DATE

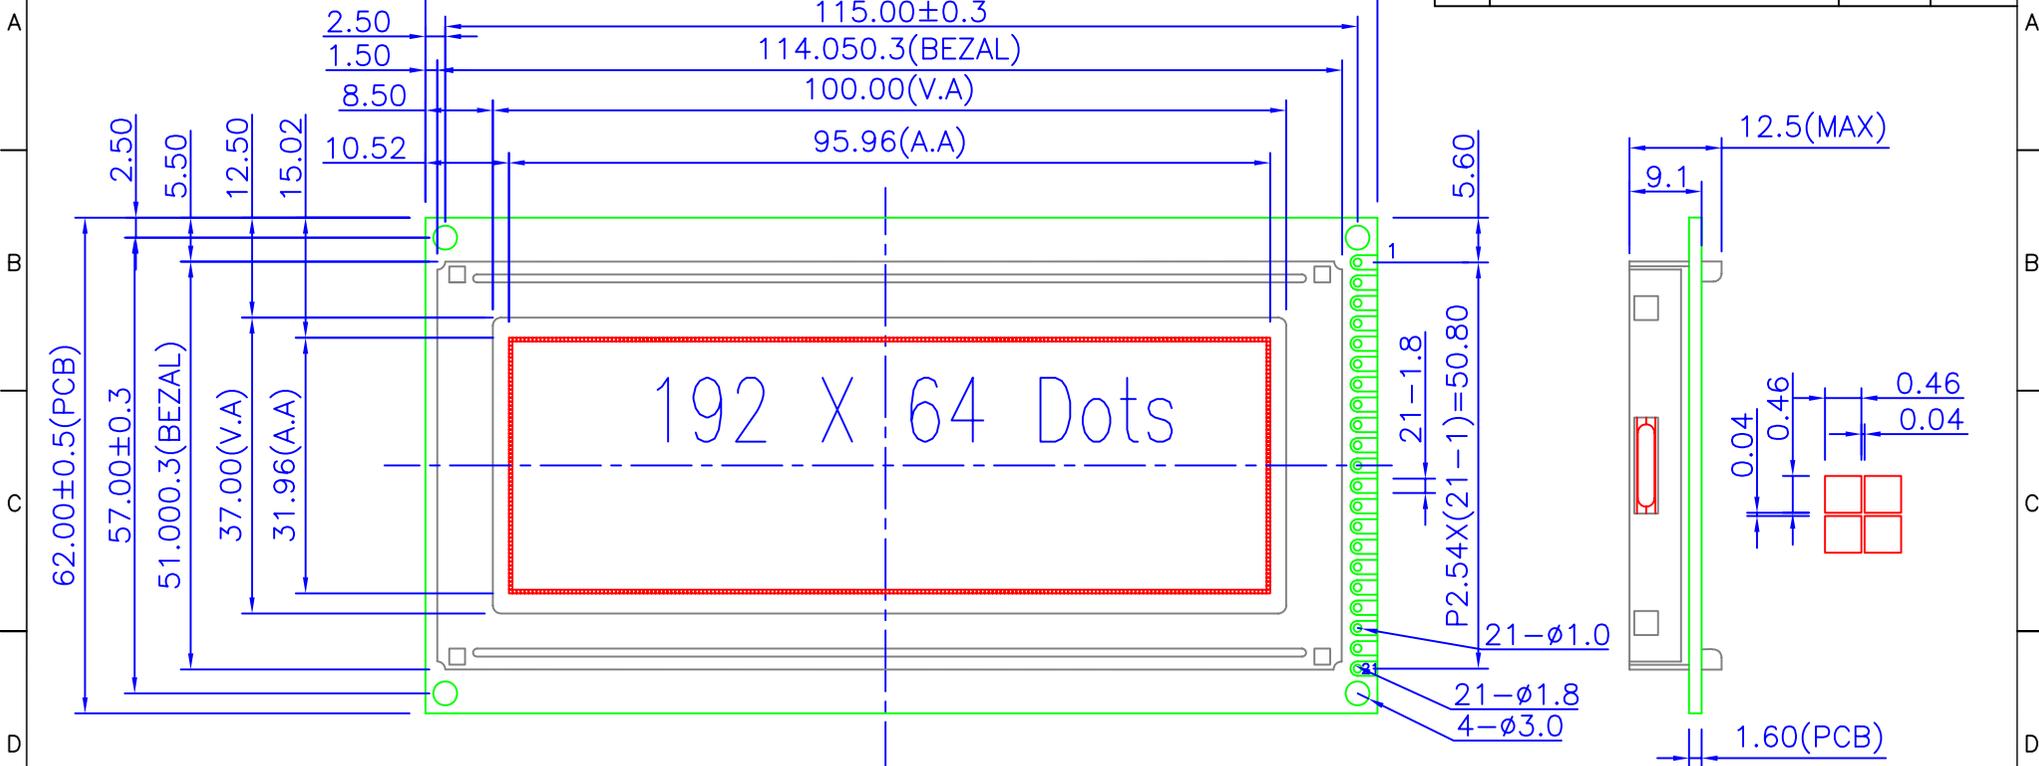

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
VSS	VDD	V0	VOUT	RS	R/W	E	D0	D1	D2	D3	D4	D5	D6	D7	/CS1	/CS2	/CS3	/RST	BLA	BLK

NOTE:

- LCD TYPE: STN-POSITIVE-Y/G
- POLARIZER MODE: TRANSFLECTIVE
- DRIVE METHOD: 1/64 DUTY, 1/9 BIAS, Vop=11.0V
- VIEWING DIR.: 6:00
- OP. TEMP.: -20°C~70°C
- ST. TEMP.: -30°C~80°C
- BACKLIGHT: Y/G, Vf=5.0V, If=240mA
- LCD CONTROLLER: NT7108C, VDD=5.0V



深圳市华远显示器件有限公司  
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No.: HYG1926405C-YF62L-VA  
DRAWING TITLE: LCM  
FILE NO.: 8

DESIGN		STANDARD	
CHECKED		TECHNOLOGY	
APPROVED		Q. A	

REV. : A	SCALE : -
PROJECTION:	UNIT : MM
	SHEET : 1/1