


REV.	CHANGE CONTENT	BY	DATE

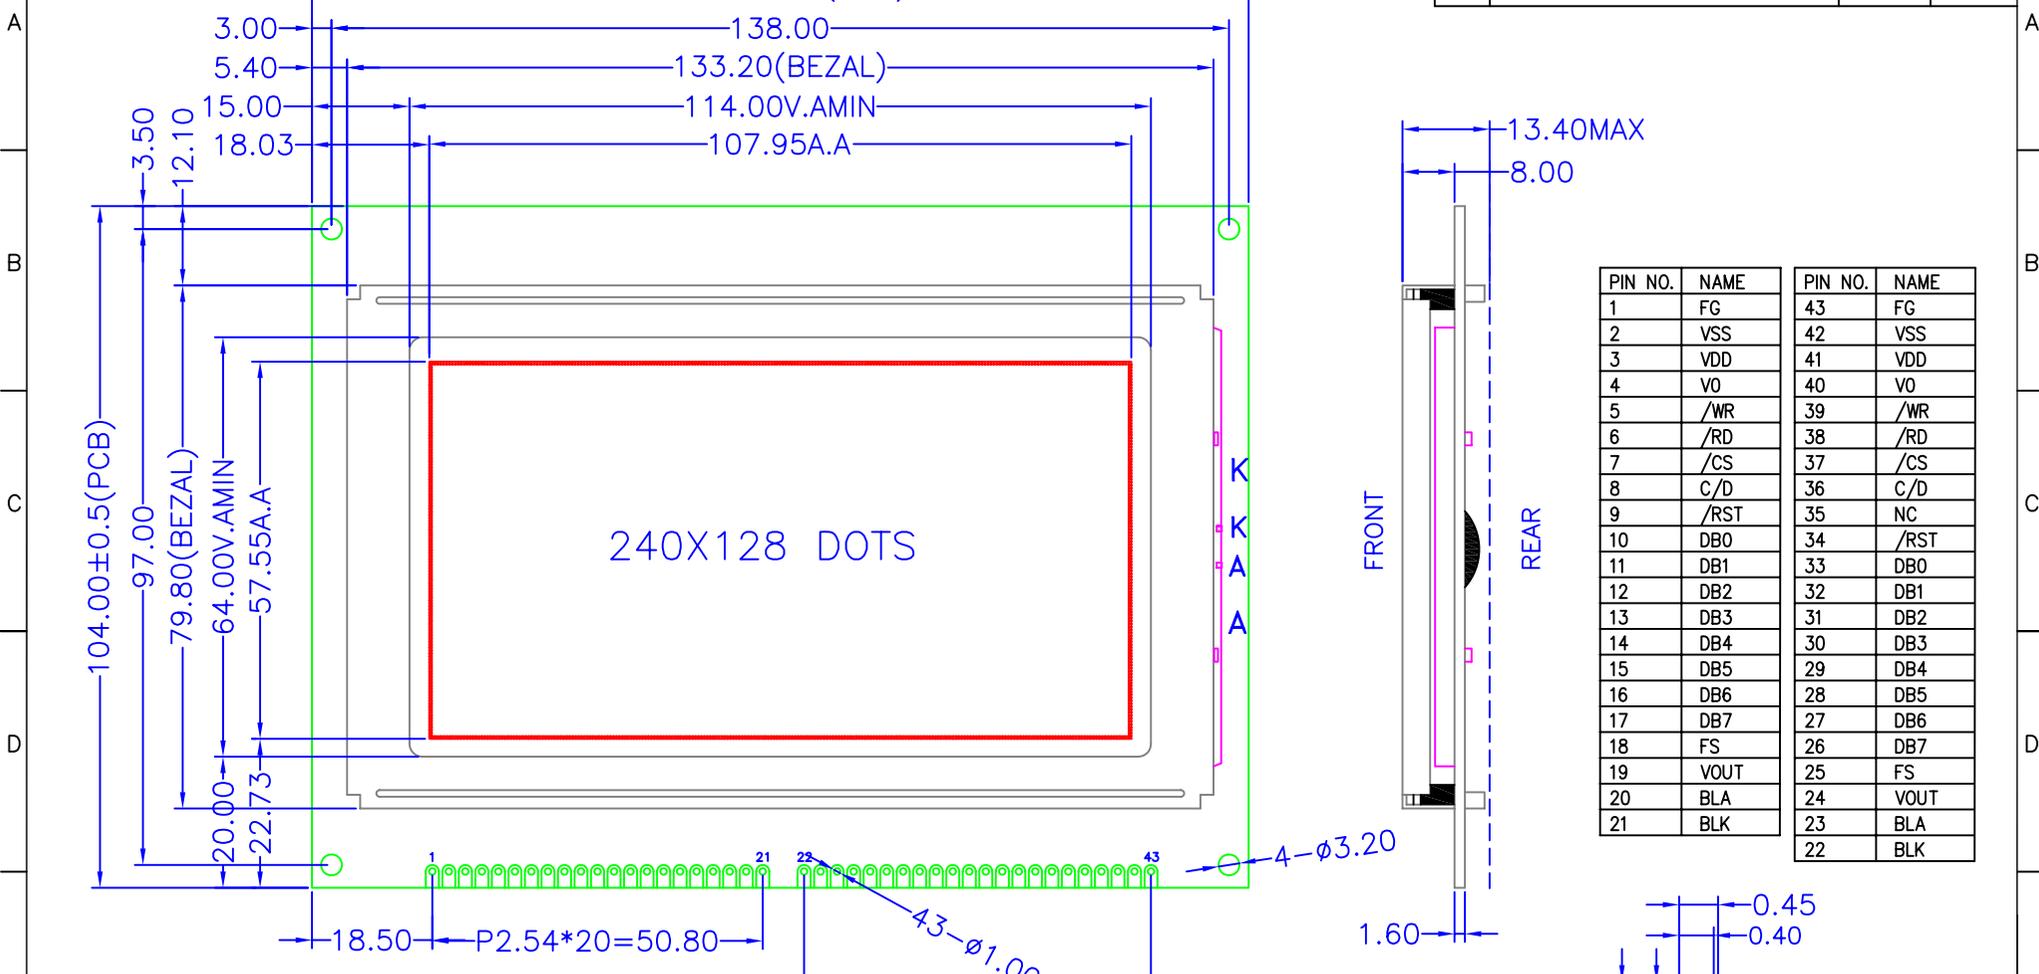

PIN NO.	NAME	PIN NO.	NAME
1	FG	43	FG
2	VSS	42	VSS
3	VDD	41	VDD
4	VO	40	VO
5	/WR	39	/WR
6	/RD	38	/RD
7	/CS	37	/CS
8	C/D	36	C/D
9	/RST	35	NC
10	DB0	34	/RST
11	DB1	33	DB0
12	DB2	32	DB1
13	DB3	31	DB2
14	DB4	30	DB3
15	DB5	29	DB4
16	DB6	28	DB5
17	DB7	27	DB6
18	FS	26	DB7
19	VOUT	25	FS
20	BLA	24	VOUT
21	BLK	23	BLA
		22	BLK

NOTE:

- LCD TYPE: STN-BLUE-NEGATIVE
- POLARIZER MODE: TRANSMISSIVE
- DRIVE METHOD: 1/128 DUTY, 1/12 BIAS, Vop=18.5V
- VIEWING DIR.: 6:00
- OP. TEMP.: -20°C~+70°C
- ST. TEMP.: -30°C~80°C
- BACKLIGHT: WHITE, Vf=5.0V, If=120mA
- LCD CONTROLLER: T6963C, VDD=5.0V

- NOTE: 1. Pin No.18 FS: FONT SELECT  
 FS=L,8X8 Character Font  
 FS=H,6X8 Character Font



深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD			
DESIGN		STANDARD	
CHECKED		TECHNOLOGY	
APPROVED		Q. A	

DRAWING No.: HYG24012802C-bt62L-VA	
DRAWING TITLE: LCM	
FILE NO.: 8	
REV.: A	SCALE: -
PROJECTION:	UNIT: MM
	SHEET: 1/1