

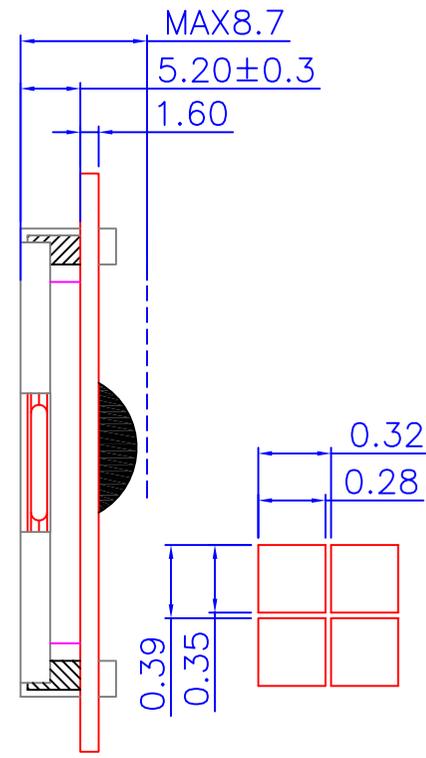


| REV. | CHANGE CONTENT | BY | DATE |
|------|----------------|----|------|
| | | | |
| | | | |
| | | | |

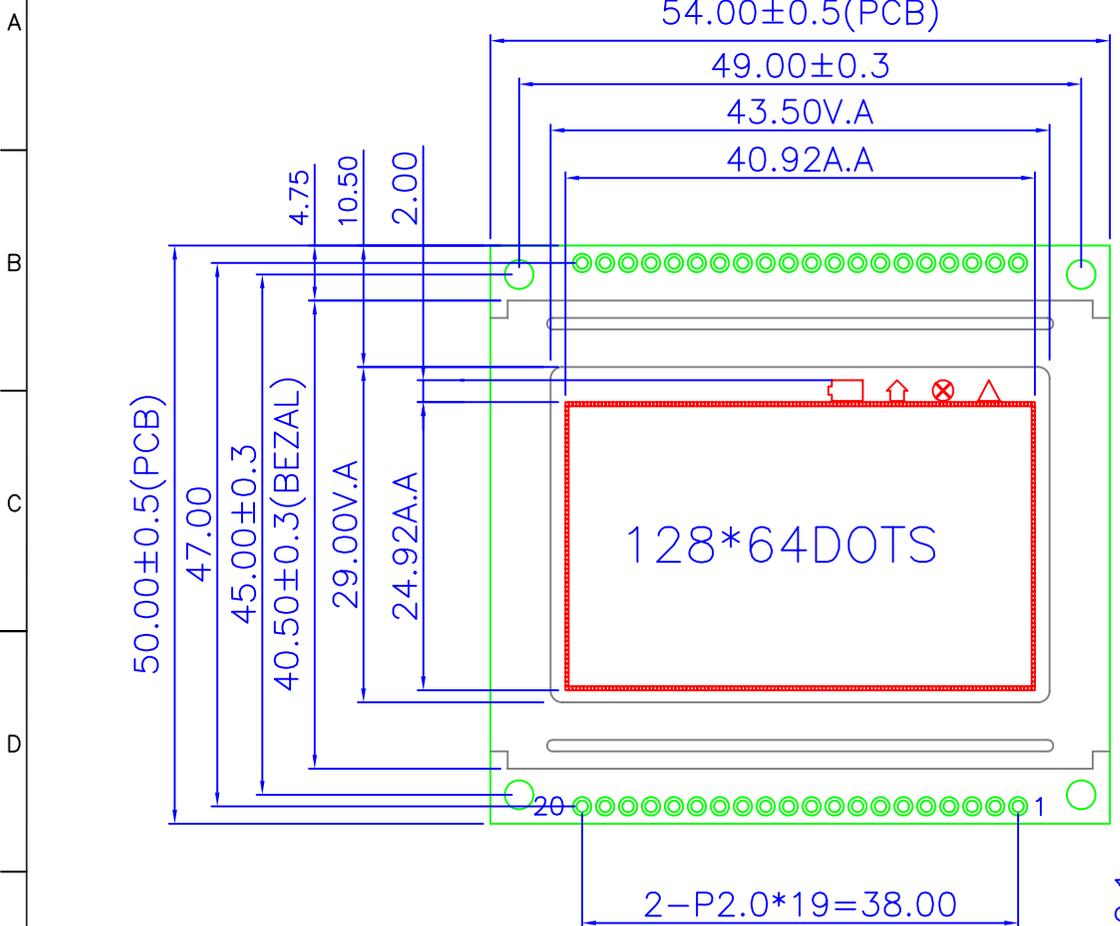

| PIN | SYMBOL |
|-----|--------|
| 1 | VSS |
| 2 | VDD |
| 3 | VO |
| 4 | RS |
| 5 | R/W |
| 6 | E |
| 7 | DB0 |
| 8 | DB1 |
| 9 | DB2 |
| 10 | DB3 |
| 11 | DB4 |
| 12 | DB5 |
| 13 | DB6 |
| 14 | DB7 |
| 15 | CS1 |
| 16 | CS2 |
| 17 | /RST |
| 18 | VOUT |
| 19 | BLA |
| 20 | BLK |

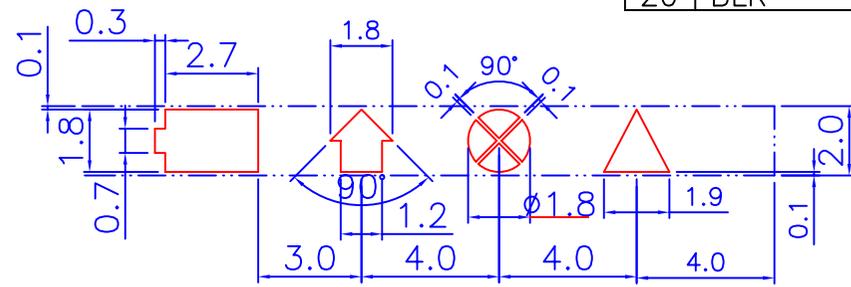

NOTE:

- LCD TYPE: STN-POSITIVE-GRAY
- POLARIZER MODE: TRANFLECTIVE
- DRIVE METHOD: 1/64 DUTY, 1/9 BIAS, Vop=12.5V
- VIEWING DIR.: 6:00
- OP. TEMP.: -10°C~80°C
- ST. TEMP.: -20°C~85°C
- BACKLIGHT: GREEN, Vf=5.0V, If=45mA
- LCD CONTROLLER: S6B0108, VDD=5.0V



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No.: HYG1286413C-GF62L-VH
DRAWING TITLE: LCM
FILE NO.: 8

| | | | |
|----------|--|------------|--|
| DESIGN | | STANDARD | |
| CHECKED | | TECHNOLOGY | |
| APPROVED | | Q. A | |

| | |
|-------------|-------------|
| REV. : A | SCALE : - |
| PROJECTION: | UNIT : MM |
| | SHEET : 1/1 |