


REV.	CHANGE CONTENT	BY	DATE

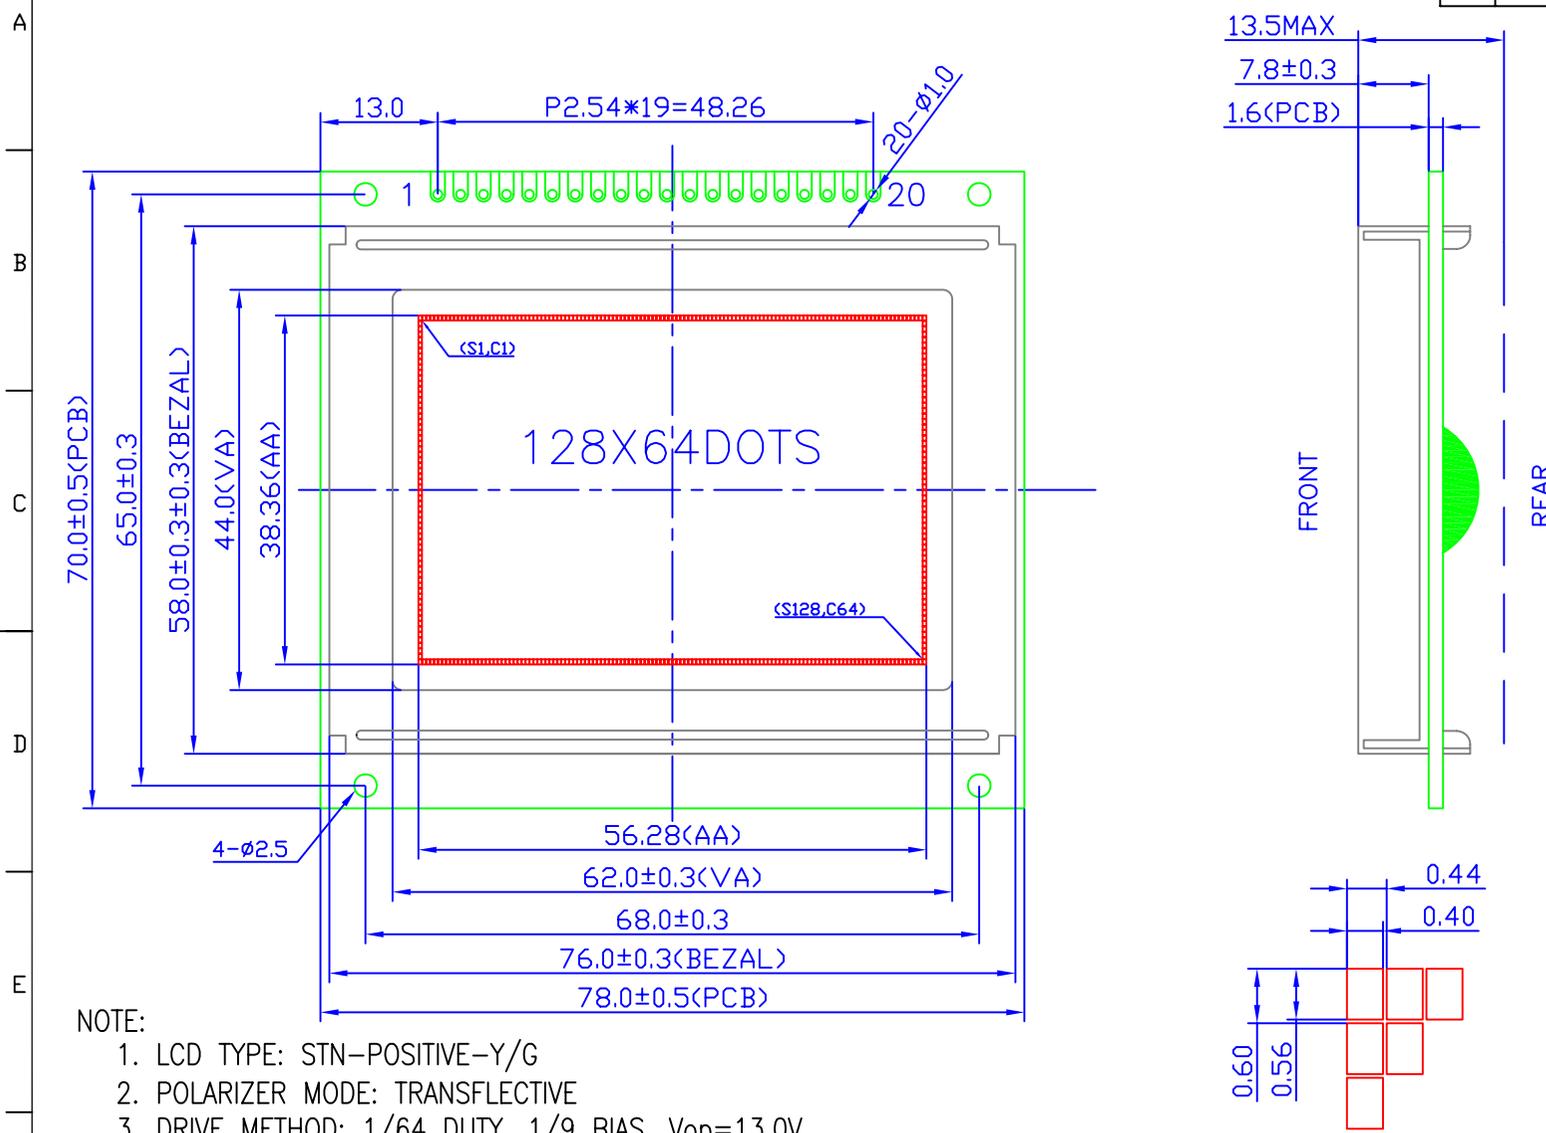

PINS ASSIGNMENTS

PIN	SYMBOL
1	FG
2	VSS
3	VDD
4	V0
5	/WR
6	/RD
7	/CE
8	C/D
9	/RST
10	D0
11	D1
12	D2
13	D3
14	D4
15	D5
16	D6
17	D7
18	FS
19	BLA
20	BLK

NOTE:

- LCD TYPE: STN-POSITIVE-Y/G
- POLARIZER MODE: TRANSFLECTIVE
- DRIVE METHOD: 1/64 DUTY, 1/9 BIAS, Vop=13.0V
- VIEWING DIR.: 6:00
- OP. TEMP.: -25°C~70°C
- ST. TEMP.: -30°C~80°C
- BACKLIGHT: AMBER, Vf=5.0V, If=480mA
- LCD CONTROLLER: T6963C, VDD=5.0V

	深圳市华远显示器件有限公司 SHENZHEN HUAYUAN DISPLAY CO., LTD			DRAWING No.: HYG1286416C-YF62L-VJ DRAWING TITLE : LCM FILE NO.: 8		
	DESIGN		TECHNOLOGY		REV. : A	SCALE : -
	CHECKED		Q.A		PROJECTION:	UNIT : MM
	STANDARD		APPROVED			SHEET : 1/1