



REV.	CHANGE CONTENT	BY	DATE

A  
B  
C  
D  
E  
F

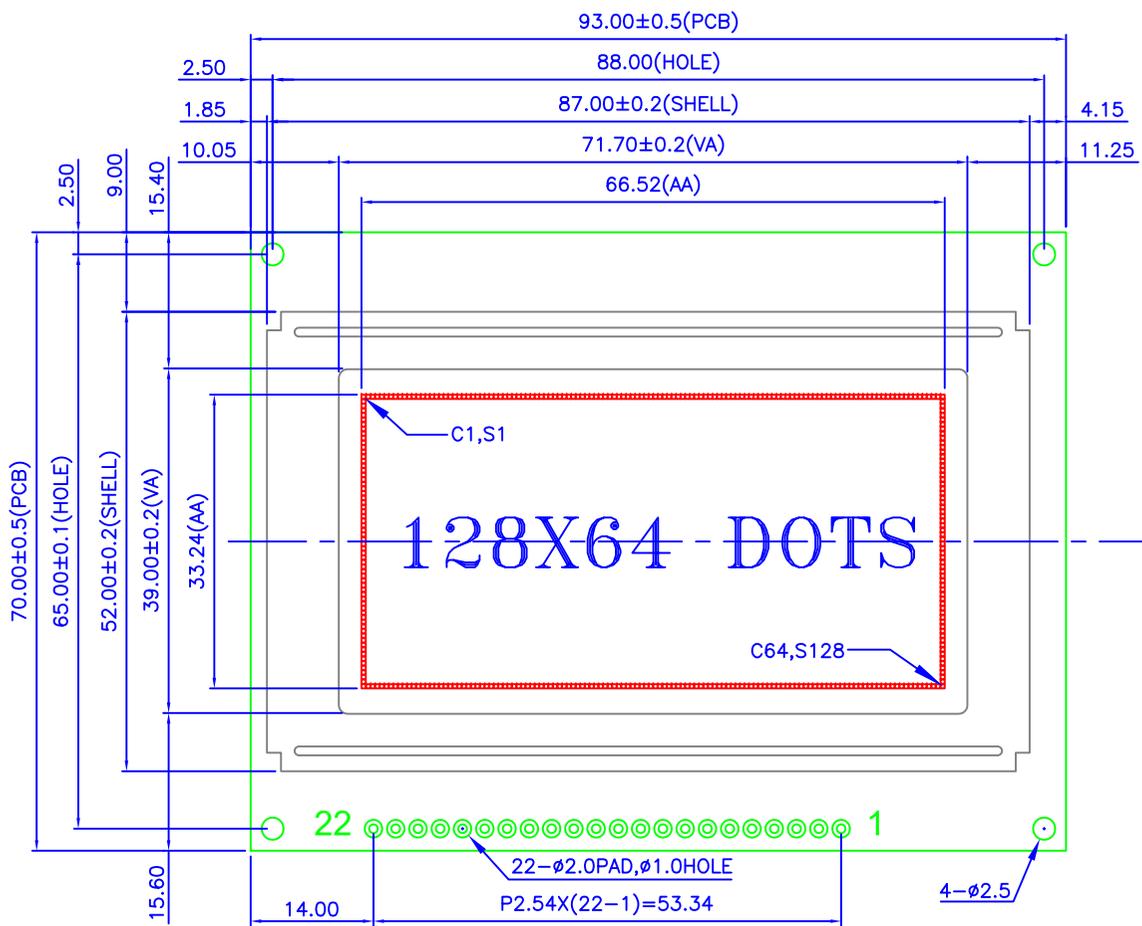


PIN ASSIGNMENT

NO	SYMBOL
1	/CSA
2	/CSB
3	VSS
4	VDD
5	VO
6	RS
7	R/W
8	E
9~16	DB0~DB7
17	CS1
18	CS2
19	/RST
20	VOUT
21	BLA
22	BLK

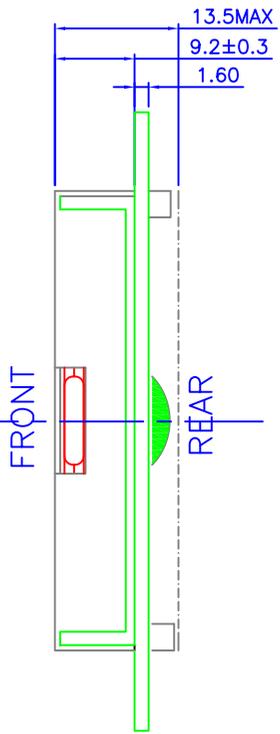

NOTE:

- LCD TYPE: STN-POSITIVE-Y/G
- POLARIZER MODE: TRANFLECTIVE
- DRIVE METHOD: 1/64 DUTY, 1/9 BIAS, Vop=11.0V
- VIEWING DIR.: 6:00
- OP. TEMP.: -25°C~70°C
- ST. TEMP.: -3°C~80°C
- BACKLIGHT: Y/G, Vf=5.0V, If=250mA
- LCD CONTROLLER: SBN0064G, VDD=5.0V



- When /CSA is '0', and cs1 is '1', IC1(left screen) is selected, all other states are invalid. When /CSB is '0', and CS2 is '1', IC2(right screen) is selected, all other states are invalid.
- The modal selected CS1 and CS2(fixed to 1)



深圳市华远显示器件有限公司  
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No. : HYG1286443C-YF62L-VB  
DRAWING TITLE: LCM  
FILE NO.: 8

DESIGN		STANDARD	
CHECKED		TECHNOLOGY	
APPROVED		Q.A	

REV. : A	SCALE : -
PROJECTION:	UNIT : mm
	SHEET : 1/2

1 2 3 4 5 6 7 8