


REV.	CHANGE CONTENT	BY	DATE

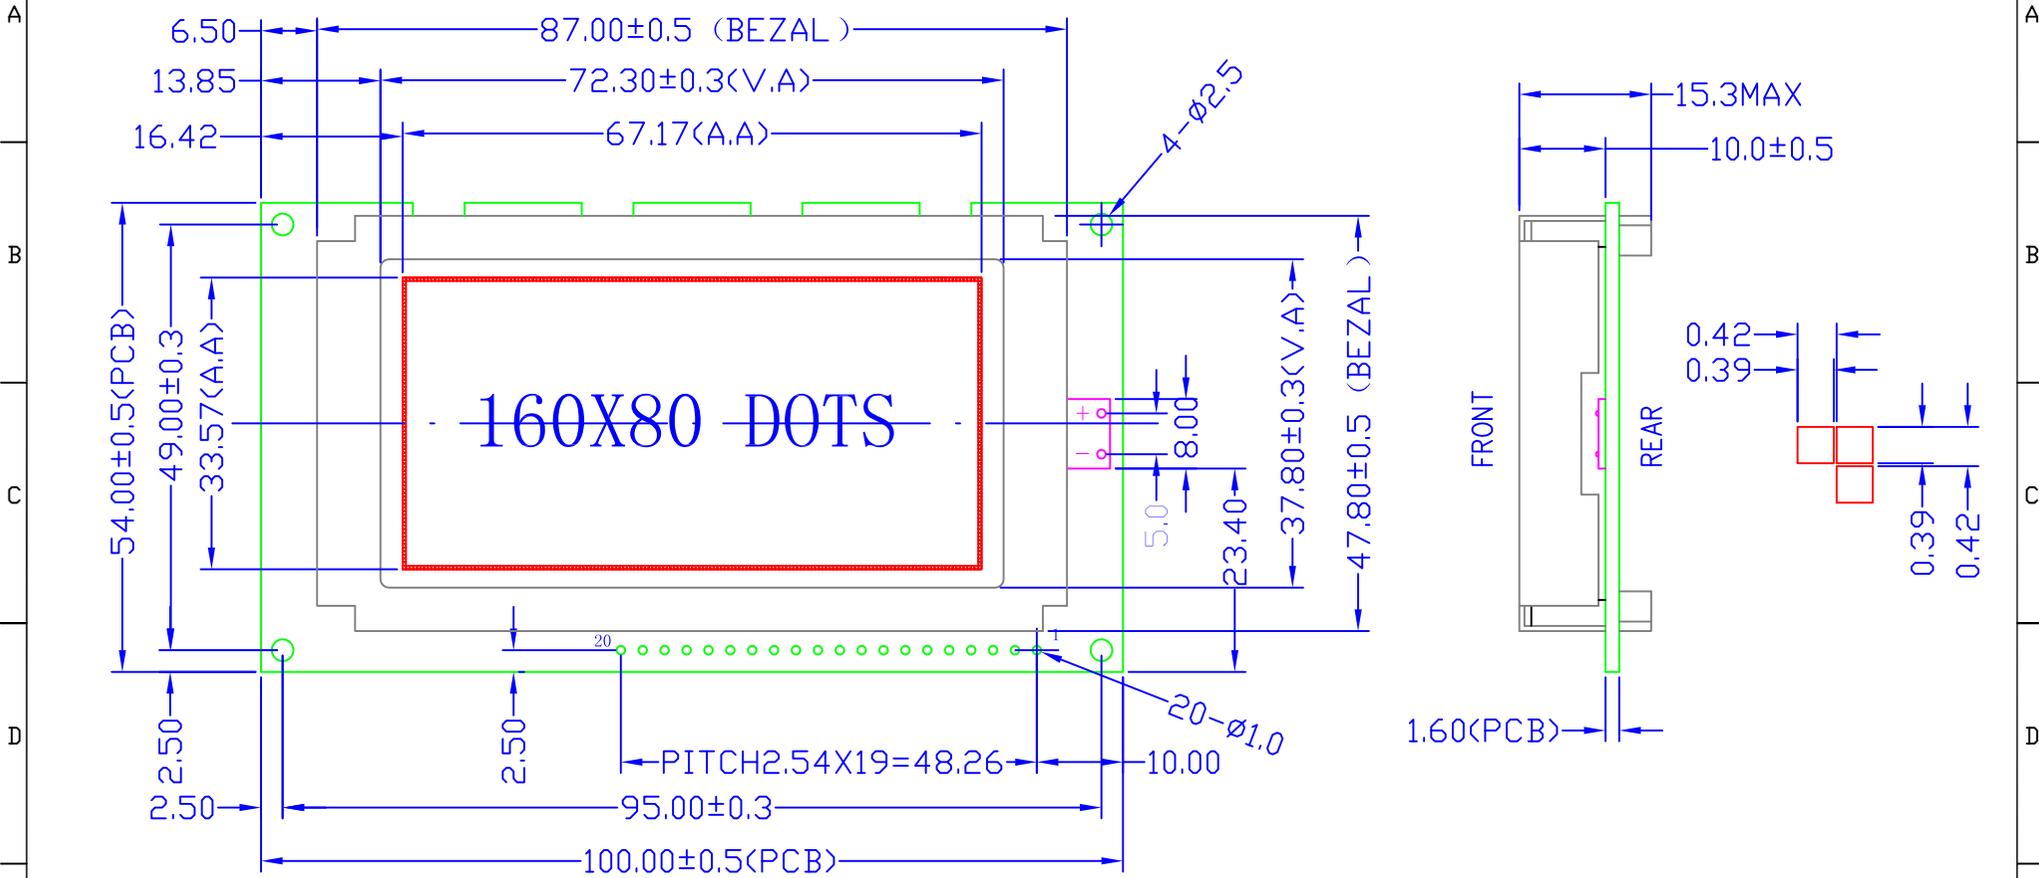

NOTE:

- LCD TYPE: FSTN-NEGATIVE
- POLARIZER MODE: TRANSMISSIVE
- DRIVE METHOD: 1/80 DUTY, 1/8.7 BIAS, Vop=10.0V
- VIEWING DIR.: 12:00
- OP. TEMP.: -20°C~70°C
- ST. TEMP.: -30°C~80°C
- BACKLIGHT: ORANGE(589nm), Vf=4.0V, If=360mA
- LCD CONTROLLER: LC7981, VDD=5.0V

PIN	1	2	3	4	5	6	7	8	9	10
	VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3

PIN	11	12	13	14	15	16	17	18	19	20
	DB4	DB5	DB6	DB7	/CS	/RES	VEE	VOUT	NC	BLA



深圳市华远显示器件有限公司
SHENZHEN HUAYUAN DISPLAY CO., LTD

DRAWING No.: HYG1608001S-ftc2L-VA
DRAWING TITLE: LCM
FILE NO.: 8

DESIGN		STANDARD	
CHECKED		TECHNOLOGY	
APPROVED		Q. A	

REV.: A	SCALE: -
PROJECTION:	UNIT: MM
	SHEET: 1/1